MikroElektronika

SOFTWARE AND HARDWARE SOLUTIONS FOR EMBEDDED WORLD . . . making it simple

mikroBASIC PRO for AVR

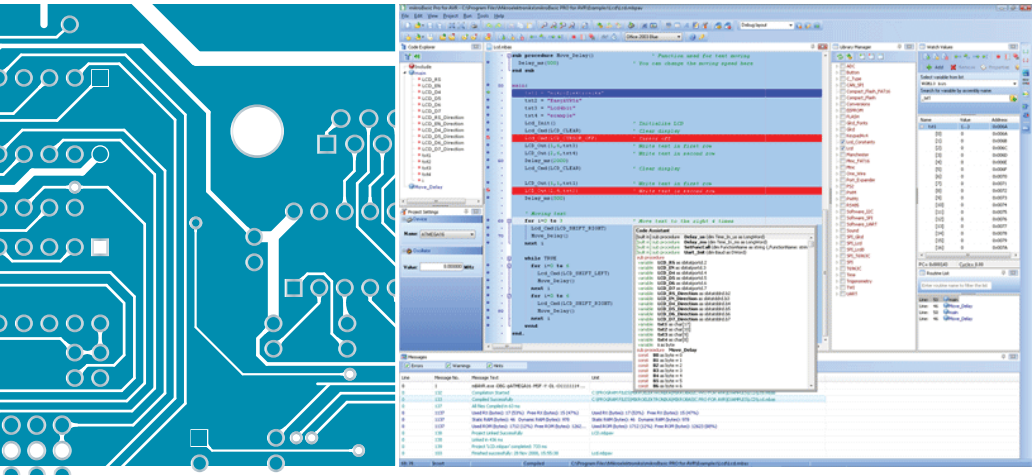

USER MANUAL

Develop your applications quickly and easily with the world's most intuitive mikroBasic PRO for AVR Microcontrollers.

Highly sophisticated IDE provides the power you need with the simplicity of a Windows based point-and-click environment.

With useful implemented tools, many practical code examples, broad set of built-in routines, and a comprehensive Help, mikroBasic PRO for AVR makes a fast and reliable tool, which can satisfy needs of experienced engineers and beginners alike.

March 2009.

Reader's note

DISCLAIMER:
mikroBasic PRO for AVR and this manual are owned by mikroElektronika and are protected by copyright law and international copyright treaty. Therefore, you should treat this manual like any other copyrighted material (e.g., a book). The manual and the compiler may not be copied, partially or as a whole without the written consent from the mikroEelktronika. The PDF-edition of the manual can be printed for private or local use, but not for distribution. Modifying the manual or the compiler is strictly prohibited.

HIGH RISK ACTIVITIES:
The *mikroBasic PRO for AVR* compiler is not fault-tolerant and is not designed, manufactured or intended for use or resale as on-line control equipment in hazardous environments requiring fail-safe performance, such as in the operation of nuclear facilities, aircraft navigation or communication systems, air traffic control, direct life support machines, or weapons systems, in which the failure of the Software could lead directly to death, personal injury, or severe physical or environmental damage ("High Risk Activities"). mikroElektronika and its suppliers specifically disclaim any express or implied warranty of fitness for High Risk Activities.

LICENSE AGREEMENT:
By using the *mikroBasic PRO for AVR* compiler, you agree to the terms of this agreement. Only one person may use licensed version of *mikroPascal for 8051* compiler at a time.
Copyright © mikroElektronika 2003 - 2009.

This manual covers *mikroBasic PRO for AVR* version 1.2 and the related topics. Newer versions may contain changes without prior notice.

COMPILER BUG REPORTS:
The compiler has been carefully tested and debugged. It is, however, not possible to guarantee a 100 % error free product. If you would like to report a bug, please contact us at the address office@mikroe.com. Please include next information in your bug report:

- Your operating system
- Version of *mikroBasic PRO for AVR*
- Code sample
- Description of a bug

CONTACT US:
mikroElektronika
Voice: + 381 (11) 36 28 830
Fax: + 381 (11) 36 28 831
Web: www.mikroe.com
E-mail: office@mikroe.com

Windows is a Registered trademark of Microsoft Corp. All other trade and/or services marks are the property of the respective owners.

Reader's Note

Table of Contents

CHAPTER 1 Introduction

CHAPTER 2 *mikroBasic PRO for AVR* Environment

CHAPTER 3 *mikroBasic PRO for AVR* Specifics

CHAPTER 4 AVR Specifics

CHAPTER 5 *mikroBasic PRO for AVR* Language Reference

CHAPTER 6 *mikroBasic PRO for AVR* Libraries

CHAPTER 1

Features . . . 2
Where to Start . . . 3
mikroElektronika Associates License Statement and Limited Warranty . . . 4
IMPORTANT - READ CAREFULLY . . . 4
This license statement and limited warranty constitute a legal agree . . . 4
ment (“License Agreement”) . . . 4
LIMITED WARRANTY . . . 5
HIGH RISK ACTIVITIES . . . 6
GENERAL PROVISIONS . . . 6
Technical Support . . . 7
How to Register . . . 8
Who Gets the License Key . . . 8
How to Get License Key . . . 8
After Receving the License Key . . . 10

CHAPTER 2

IDE Overview . . . 12
Main Menu Options . . . 13
File Menu Options . . . 14
Edit Menu Options . . . 15
Find Text . . . 16
Dialog box . . . 16
Find In Files . . . 17
Go To Line . . . 17
Regular expressions . . . 17
View Menu Options . . . 18
Toolbars . . . 19
File Toolbar . . . 19
Edit Toolbar . . . 19
Advanced Edit Toolbar . . . 20
Find/Replace Toolbar . . . 20
Project Toolbar . . . 21
Build Toolbar . . . 21

Debugger . . . 22
Styles Toolbar . . . 22
Tools Toolbar . . . 23
Project Menu Options . . . 24
Run Menu Options . . . 26
Tools Menu Options . . . 27
Help Menu Options . . . 28
Keyboard Shortcuts . . . 29
IDE Overview . . . 31
Customizing IDE Layout . . . 32
Docking Windows . . . 32
Saving Layout . . . 33
Once you have a . . . 33
Auto Hide . . . 34
Advanced Code Editor . . . 35
Advanced Editor Features . . . 35
Code Assistant . . . 36
Code Folding . . . 37
Parameter Assistant . . . 38
Code Templates (Auto Complete) . . . 38
Auto Correct . . . 38
Spell Checker . . . 39
Bookmarks . . . 39
Goto Line . . . 39
Comment / Uncomment . . . 39
Code Explorer . . . 40
Routine List . . . 41
Project Manager . . . 42
Project Settings Window . . . 43
Library Manager . . . 44
Error Window . . . 46
Statistics . . . 47
Memory Usage Windows . . . 47
RAM Memory . . . 47
Rx Memory Space . . . 47
Data Memory Space . . . 48

Special Function Registers 48
Summarizes all Special Funct 48
General Purpose Registers 49
ROM Memory 49
ROM Memory Usage 49
ROM Memory Allocation 50
Procedures Windows 50
Procedures Size Window 50
Procedures Locations Window 51
HTML Window 51
Integrated Tools 52
USART Terminal 52
ASCII Chart 53
EEPROM Editor 54
7 Segment Display Decoder 55
UDP Terminal 56
Graphic Lcd Bitmap Editor 57
Lcd Custom Character 58
Macro Editor 59
Options 60
Code editor 60
Tools 60
Output settings 61
Regular Expressions 62
Introduction 62
Simple matches 62
Escape sequences 62
Character classes 63
Metacharacters 63
Metacharacters - Line separators 63
Metacharacters - Predefined classes 64
Metacharacters - Word boundaries 64
Metacharacters - Iterators 65
Metacharacters - Alternatives 66
Examples: 66
Metacharacters - Subexpressions 66

Metacharacters - Backreferences 66
mikroBasic PRO for AVR Command Line Options 67
Projects 68
New Project 68
New Project Wizard Steps 69
Customizing Projects 72
Edit Project 72
Managing Project Group 72
Add/Remove Files from Project 72
Project Level Defines 73
Source Files 74
Managing Source Files 74
Creating new source file 74
Opening an existing file 74
Printing an open file 74
Saving file 75
Saving file under a different name 75
Closing file 75
Clean Project Folder 76
Clean Project Folder 76
Compilation 77
Output Files 77
Assembly View 77
Error Messages 78
Compiler Error Messages: 78
Warning Messages: 79
Hint Messages: 79
Software Simulator Overview 80
Watch Window 80
Stopwatch Window 82
RAM Window 83
Software Simulator Options 84
Creating New Library 85
Multiple Library Versions 86

CHAPTER 3

Basic Standard Issues 88
Divergence from the Basic Standard 88
Basic Language Exstensions 88
Predefined Globals and Constants 89
SFRs and related constants 89
Math constants 89
Predefined project level defines 89
Accessing Individual Bits 90
Accessing Individual Bits Of Variables 90
sbit type 90
bit type 91
Interrupts 92
Function Calls from Interrupt 92
Linker Directives 94
Directive absolute 94
Directive org 94
Built-in Routines 95
Lo 96
Hi 96
Higher 96
Highest 97
Inc 97
Dec 97
Delay_us 98
Delay_ms 98
Vdelay_ms 98
Delay_Cyc 99
Clock_KHz 99
Clock_MHz 99
SetFuncCall 100
Code Optimization 101
Constant folding 101
Constant propagation 101
Copy propagation 101
Value numbering 101

"Dead code" ellimination . . . 101
Stack allocation . . . 101
Local vars optimization . . . 101
Better code generation and local optimization . . . 101
Types Efficiency . . . 103

CHAPTER 4

Nested Calls Limitations . . . 104
Important notes: . . . 104
AVR Memory Organization . . . 105
Program Memory (ROM) . . . 105
Data Memory . . . 105
Memory Type Specifiers . . . 107
code . . . 107
data . . . 107
rx . . . 107
io . . . 108
sfr . . . 108
register . . . 108
Note: . . . 108

CHAPTER 5

mikroBasic PRO for AVR Language Reference . . . 110
Lexical Elements Overview . . . 111
Whitespace . . . 112
Newline Character . . . 112
Whitespace in Strings . . . 112
Comments . . . 113
Tokens . . . 113
Token Extraction Example . . . 113
Literals . . . 114
Integer Literals . . . 114
Floating Point Literals . . . 114
Character Literals . . . 115

String Literals . . . 115
Keywords . . . 116
Identifiers . . . 117
Case Sensitivity . . . 117
Uniqueness and Scope . . . 117
Identifier Examples . . . 117
Punctuators . . . 118
Brackets . . . 118
Parentheses . . . 118
Comma . . . 118
Colon . . . 119
Dot . . . 119
Program Organization . . . 120
Organization of Main Module . . . 120
Organization of Other Modules . . . 121
Scope and Visibility . . . 123
Scope . . . 123
Visibility . . . 123
Modules . . . 124
Include Clause . . . 124
Main Module . . . 125
Other Modules . . . 125
Interface Section . . . 125
Implementation Section . . . 126
Variables . . . 127
Variables and AVR . . . 127
Constants . . . 128
Labels . . . 129
Symbols . . . 130
Functions and Procedures . . . 131
Functions . . . 131
Calling a function . . . 131
Example . . . 132
Procedures . . . 132
Calling a procedure . . . 132
Example . . . 133

Function Pointers . . . 133
Example: . . . 133
Example: . . . 134
Forward declaration . . . 135
Types . . . 136
Type Categories . . . 136
Simple Types . . . 137
Arrays . . . 138
Array Declaration . . . 138
Constant Arrays . . . 138
Strings . . . 139
Note . . . 139
Pointers . . . 140
@ Operator . . . 140
Structures . . . 141
Structure Member Access . . . 142
Types Conversions . . . 143
Implicit Conversion . . . 143
Promotion . . . 143
Clipping . . . 144
Explicit Conversion . . . 144
Operators . . . 145
Operators Precedence and Associativity . . . 145
Arithmetic Operators . . . 146
Division by Zero . . . 146
Unary Arithmetic Operators . . . 146
Relational Operators . . . 147
Relational Operators in Expressions . . . 147
Bitwise Operators . . . 148
Bitwise Operators Overview . . . 148
Logical Operations on Bit Level . . . 148
The bitwise operators and, or, and xor perform logical oper . . . 148
Unsigned and Conversions . . . 149
Signed and Conversions . . . 149
Bitwise Shift Operators . . . 150
Boolean Operators . . . 150

Expressions 151
Statements 152
Assignment Statements 152
Conditional Statements 153
If Statement 153
Nested if statements 153
Select Case Statement 154
Nested Case Statements 155
Iteration Statements 155
For Statement 156
Endless Loop 156
While Statement 157
Do Statement 158
Jump Statements 158
Break and Continue Statements 159
Break Statement 159
Continue Statement 159
Exit Statement 160
Goto Statement 161
Gosub Statement 162
asm Statement 163
Directives 164
Compiler Directives 164
Directives #DEFINE and #UNDEFINE 164
Directives #IFDEF, #ELSEIF and #ELSE 164
Predefined Flags 165
Linker Directives 166
Directive absolute 166
Directive org 166

CHAPTER 6

Hardware AVR-specific Libraries 168
Miscellaneous Libraries 168
Library Dependencies 169
ADC Library 170

ADC_Read 170
Library Example 170
This example code reads a 170
HW Connection 171
CANSPI Library 172
External dependencies of CANSPI Library 173
Library Routines 173
CANSPISetOperationMode 174
CANSPIGetOperationMode 174
CANSPIInitialize 175
CANSPISetBaudRate 177
CANSPISetMask 178
CANSPISetFilter 179
CANSPIRead 180
CANSPIWrite 181
CANSPI Constants 182
CANSPI_OP_MODE 182
CANSPI_CONFIG_FLAGS 182
CANSPI_TX_MSG_FLAGS 183
CANSPI_RX_MSG_FLAGS 184
CANSPI_MASK 184
CANSPI_FILTER 184
Library Example 185
HW Connection 188
Compact Flash Library 189
External dependencies of Compact Flash Library 190
Library Routines 191
Cf_Init 192
Cf_Detect 193
Cf_Enable 193
Cf_Disable 193
Cf_Read_Init 194
Cf_Read_Byte 194
Cf_Write_Init 195
Cf_Write_Byte 195
Cf_Read_Sector 196

Cf_Write_Sector . . . 196
Cf_Fat_Init . . . 197
Cf_Fat_QuickFormat . . . 197
Cf_Fat_Assign . . . 198
Cf_Fat_Reset . . . 199
Cf_Fat_Read . . . 199
Cf_Fat_Rewrite . . . 200
Cf_Fat_Append . . . 200
Cf_Fat_Delete . . . 200
Cf_Fat_Write . . . 201
Cf_Fat_Set_File_Date . . . 201
Cf_Fat_Get_File_Date . . . 202
Cf_Fat_Get_File_Size . . . 202
Cf_Fat_Get_Swap_File . . . 203
Library Example . . . 205
HW Connection . . . 210
EEPROM Library . . . 211
Library Routines . . . 211
EEPROM_Read . . . 211
EEPROM_Write . . . 212
Library Example . . . 213
Flash Memory Library . . . 214
Library Routines . . . 214
FLASH_Read_Byte . . . 214
FLASH_Read_Bytes . . . 215
FLASH_Read_Word . . . 215
FLASH_Read_Words . . . 216
Library Example . . . 216
Graphic Lcd Library . . . 218
External dependencies of Graphic Lcd Library . . . 218
Library Routines . . . 219
Glcd_Init . . . 220
Glcd_Set_Side . . . 221
Glcd_Set_X . . . 221
Glcd_Set_Page . . . 222
Glcd_Read_Data . . . 222

Glcd_Write_Data . . . 223
Glcd_Fill . . . 223
Glcd_Dot . . . 224
Glcd_Line . . . 224
Glcd_V_Line . . . 225
Glcd_H_Line . . . 225
Glcd_Rectangle . . . 226
Glcd_Box . . . 227
Glcd_Circle . . . 227
Glcd_Set_Font . . . 228
Glcd_Write_Char . . . 229
Glcd_Write_Text . . . 230
Glcd_Image . . . 230
Library Example . . . 231
HW Connection . . . 233
Keypad Library . . . 234
Library Routines . . . 234
Keypad_Init . . . 235
Keypad_Key_Press . . . 235
Keypad_Key_Click . . . 235
Library Example . . . 236
HW Connection . . . 239
Lcd Library . . . 240
External dependencies of Lcd Library . . . 240
Library Routines . . . 241
Lcd_Init . . . 241
Lcd_Out . . . 242
Lcd_Out_Cp . . . 242
Lcd_Chr . . . 243
Lcd_Chr_Cp . . . 243
Lcd_Cmd . . . 244
Available Lcd Commands . . . 244
Library Example . . . 245
Manchester Code Library . . . 247
External dependencies of Manchester Code Library . . . 247
Library Routines . . . 248

Man_Receive_Init 248
Man_Receive 249
Man_Send_Init 249
Man_Send 250
Man_Synchro 250
Man_Break 251
Library Example 252
Connection Example 254
Multi Media Card Library 255
Secure Digital Card 255
External dependencies of MMC Library 255
Library Routines 256
Mmc_Init 257
Mmc_Read_Sector 258
Mmc_Write_Sector 259
Mmc_Read_Cid 260
Mmc_Read_Csd 260
Mmc_Fat_Init 261
Mmc_Fat_QuickFormat 262
Mmc_Fat_Assign 263
Mmc_Fat_Reset 264
Mmc_Fat_Read 265
Mmc_Fat_Rewrite 265
Mmc_Fat_Append 266
Mmc_Fat_Delete 266
Mmc_Fat_Write 267
Mmc_Fat_Set_File_Date 268
Mmc_Fat_Get_File_Date 269
Mmc_Fat_Get_File_Size 270
Mmc_Fat_Get_Swap_File 271
Library Example 273
HW Connection 280
OneWire Library 281
External dependencies of OneWire Library 281
Library Routines 281
Ow_Reset 282

Ow_Read 283
Ow_Write 284
Library Example 285
HW Connection 288
Port Expander Library 289
External dependencies of Port Expander Library 289
Library Routines 289
Expander_Init 290
Expander_Read_Byte 291
Expander_Write_Byte 291
Expander_Read_PortA 292
Expander_Read_PortB 292
Expander_Read_PortAB 293
Expander_Write_PortA 294
Expander_Write_PortB 295
Expander_Write_PortAB 296
Expander_Set_DirectionPortA 297
Expander_Set_DirectionPortB 297
Expander_Set_DirectionPortAB 298
Expander_Set_PullUpsPortA 298
Expander_Set_PullUpsPortB 299
Expander_Set_PullUpsPortAB 299
Library Example 300
HW Connection 301
PS/2 Library 302
External dependencies of PS/2 Library 302
Library Routines 302
Ps2_Config 303
Ps2_Key_Read 304
Special Function Keys 305
Library Example 306
HW Connection 307
PWM Library 308
Library Routines 308
Predefined constants used in PWM library 308
PWM_Init 310

PWM_Set_Duty . . . 311
PWM_Start . . . 311
PWM_Stop . . . 312
PWM1_Init . . . 312
PWM1_Set_Duty . . . 314
PWM1_Start . . . 314
PWM1_Stop . . . 314
Library Example . . . 315
HW Connection . . . 316
PWM 16 bit Library . . . 317
Library Routines . . . 317
Predefined constants used in PWM-16bit library . . . 318
PWM16bit_Init . . . 319
PWM16bit_Change_Duty . . . 321
PWM16bit_Start . . . 322
PWM16bit_Stop . . . 322
Library Example . . . 322
The example changes PWM duty ratio continually . . . 322
HW Connection . . . 324
PWM demonstrati . . . 324
RS-485 Library . . . 325
External dependencies of RS-485 Library . . . 326
Library Routines . . . 326
RS485Master_Init . . . 327
RS485Master_Receive . . . 328
RS485Master_Send . . . 329
RS485Slave_Init . . . 330
RS485Slave_Receive . . . 331
RS485Slave_Send . . . 332
Library Example . . . 332
HW Connection . . . 336
Message format and CRC calculations . . . 337
Software I²C Library . . . 338
External dependencies of Soft_I2C Library . . . 338
Library Routines . . . 339
Soft_I2C_Init . . . 339

Soft_I2C_Start . . . 340
Soft_I2C_Read . . . 340
Soft_I2C_Write . . . 341
Soft_I2C_Stop . . . 341
Soft_I2C_Break . . . 342
Library Example . . . 343
Software SPI Library . . . 346
External dependencies of Software SPI Library . . . 346
Library Routines . . . 347
Soft_SPI_Init . . . 347
Soft_SPI_Read . . . 348
Soft_SPI_Write . . . 348
Library Example . . . 349
Software UART Library . . . 351
External dependencies of Software UART Library . . . 351
Library Routines . . . 351
Soft_UART_Init . . . 352
Soft_UART_Read . . . 353
Soft_UART_Write . . . 354
Soft_UART_Break . . . 355
Library Example . . . 356
Sound Library . . . 357
External dependencies of Sound Library . . . 357
Library Routines . . . 357
Sound_Init . . . 358
Sound_Play . . . 358
Library Example . . . 359
HW Connection . . . 361
SPI Library . . . 362
Library Routines . . . 362
SPI1_Init . . . 362
SPI1_Init_Advanced . . . 363
SPI1_Read . . . 364
SPI1_Write . . . 364
Library Example . . . 365
HW Connection . . . 366

SPI Ethernet Library 367
External dependencies of SPI Ethernet Library 368
Library Routines 369
Spi_Ethernet_Init 369
Spi_Ethernet_Enable 371
Spi_Ethernet_Disable 372
Spi_Ethernet_doPacket 374
Spi_Ethernet_putByte 375
Spi_Ethernet_putBytes 375
Spi_Ethernet_putConstBytes 376
Spi_Ethernet_putString 376
Spi_Ethernet_putConstString 377
Spi_Ethernet_getByte 377
Spi_Ethernet_getBytes 378
Spi_Ethernet_UserTCP 379
Spi_Ethernet_UserUDP 380
Library Example 381
This code shows h 381
HW Connection 389
SPI Graphic Lcd Library 390
External dependencies of SPI Graphic Lcd Library 390
Library Routines 390
SPI_Glcd_Init 391
SPI_Glcd_Set_Side 392
SPI_Glcd_Set_Page 392
SPI_Glcd_Set_X 393
SPI_Glcd_Read_Data 393
SPI_Glcd_Write_Data 394
SPI_Glcd_Fill 394
SPI_Glcd_Dot 395
SPI_Glcd_Line 395
SPI_Glcd_V_Line 396
SPI_Glcd_H_Line 396
SPI_Glcd_Rectangle 397
SPI_Glcd_Box 398
SPI_Glcd_Circle 398

SPI_Glcd_Set_Font . . . 399
SPI_Glcd_Write_Char . . . 400
SPI_Glcd_Write_Text . . . 401
SPI_Glcd_Image . . . 402
Library Example . . . 402
The example demonstrates how to . . . 402
HW Connection . . . 405
SPI Lcd Library . . . 406
External dependencies of SPI Lcd Library . . . 406
Library Routines . . . 406
SPI_Lcd_Config . . . 407
SPI_Lcd_Out . . . 408
SPI_Lcd_Out_Cp . . . 408
SPI_Lcd_Chr . . . 409
SPI_Lcd_Chr_Cp . . . 409
SPI_Lcd_Cmd . . . 410
Available SPI Lcd Commands . . . 410
Library Example . . . 411
HW Connection . . . 412
SPI Lcd8 (8-bit interface) Library . . . 413
External dependencies of SPI Lcd Library . . . 413
Library Routines . . . 413
SPI_Lcd8_Config . . . 414
SPI_Lcd8_Out . . . 415
SPI_Lcd8_Out_Cp . . . 415
SPI_Lcd8_Chr . . . 416
SPI_Lcd8_Chr_Cp . . . 416
SPI_Lcd8_Cmd . . . 417
Available SPI Lcd8 Commands . . . 417
Library Example . . . 418
HW Connection . . . 419
SPI T6963C Graphic Lcd Library . . . 420
External dependencies of SPI T6963C Graphic Lcd Library . . . 420
Library Routines . . . 421
SPI_T6963C_Config . . . 422
SPI_T6963C_WriteData . . . 423

SPI_T6963C_WriteCommand 424
SPI_T6963C_SetPtr 424
SPI_T6963C_WaitReady 424
SPI_T6963C_Fill 425
SPI_T6963C_Dot 425
SPI_T6963C_Write_Char 426
SPI_T6963C_Write_Text 427
SPI_T6963C_Line 428
SPI_T6963C_Rectangle 428
SPI_T6963C_Box 429
SPI_T6963C_Circle 429
SPI_T6963C_Image 430
SPI_T6963C_Sprite 430
SPI_T6963C_Set_Cursor 431
SPI_T6963C_ClearBit 431
SPI_T6963C_SetBit 431
SPI_T6963C_NegBit 432
SPI_T6963C_DisplayGrPanel 432
SPI_T6963C_DisplayTxtPanel 432
SPI_T6963C_SetGrPanel 433
SPI_T6963C_SetTxtPanel 433
SPI_T6963C_PanelFill 434
SPI_T6963C_GrFill 434
SPI_T6963C_TxtFill 434
SPI_T6963C_Cursor_Height 435
SPI_T6963C_Graphics 435
SPI_T6963C_Text 435
SPI_T6963C_Cursor 436
SPI_T6963C_Cursor_Blink 436
Library Example 436
The following drawing demo tests advanced routines of the S 436
HW Connection 441
SPI T6963C Graphic Lcd Library 442
External dependencies of T6963C Graphic Lcd Library 443
Library Routines 444
T6963C_Init 445

T6963C_WriteData 446
T6963C_WriteCommand 447
T6963C_SetPtr 447
T6963C_WaitReady 447
T6963C_Fill 448
T6963C_Dot 448
T6963C_Write_Char 449
T6963C_Write_Text 450
T6963C_Line 451
T6963C_Rectangle 451
T6963C_Box 452
T6963C_Circle 452
T6963C_Image 453
T6963C_Sprite 453
T6963C_Set_Cursor 454
T6963C_DisplayGrPanel 454
T6963C_DisplayTxtPanel 454
T6963C_SetGrPanel 455
T6963C_SetTxtPanel 455
T6963C_PanelFill 456
T6963C_GrFill 456
T6963C_TxtFill 456
T6963C_Cursor_Height 457
T6963C_Graphics 457
T6963C_Text 457
T6963C_Cursor 458
T6963C_Cursor_Blink 458
Library Example 458
The following drawing demo tests advanced routines 458
HW Connection 464
TWI Library 465
Library Routines 465
TWI_Init 465
TWI_Busy 465
TWI_Start 466
TWI_Read 466

TWI_Write . . . 466
TWI_Stop . . . 467
TWI_Status . . . 467
TWI_Close . . . 467
Library Example . . . 467
This code demonstrates use of TWI Library proc . . . 467
HW Connection . . . 468
UART Library . . . 469
Library Routines . . . 469
UARTx_Init . . . 470
UARTx_Init_Advanced . . . 471
UARTx_Data_Ready . . . 472
UARTx_Read . . . 472
UARTx_Read_Text . . . 473
UARTx_Write . . . 474
UARTx_Write_Text . . . 474
Library Example . . . 475
HW Connection . . . 475
Button Library . . . 476
External dependencies of Button Library . . . 476
Library Routines . . . 476
Button . . . 476
Conversions Library . . . 478
Library Routines . . . 478
ByteToStr . . . 478
ShortToStr . . . 479
WordToStr . . . 479
IntToStr . . . 480
LongintToStr . . . 480
LongWordToStr . . . 481
FloatToStr . . . 482
Dec2Bcd . . . 483
Bcd2Dec16 . . . 483
Dec2Bcd16 . . . 484
Math Library . . . 485
Library Functions . . . 485

acos . . . 485
asin . . . 485
atan . . . 486
atan2 . . . 486
ceil . . . 486
cos . . . 486
cosh . . . 486
eval_poly . . . 486
exp . . . 487
fabs . . . 487
floor . . . 487
frexp . . . 487
ldexp . . . 487
log . . . 487
log10 . . . 487
modf . . . 488
pow . . . 488
sin . . . 488
sinh . . . 488
sqrt . . . 488
tan . . . 488
tanh . . . 488
String Library . . . 489
Library Functions . . . 489
memchr . . . 489
memcmp . . . 490
memcpy . . . 490
memmove . . . 490
memset . . . 491
strcat . . . 491
strchr . . . 491
strcmp . . . 491
strcpy . . . 492
strcspn . . . 492
strlen . . . 492
strncat . . . 492

strncmp . . . 493
strncpy . . . 493
strpbrk . . . 493
strrchr . . . 493
strspn . . . 494
strstr . . . 494
Time Library . . . 495
Library Routines . . . 495
Time_dateToEpoch . . . 495
Time_epochToDate . . . 496
Time_dateDiff . . . 496
Library Example . . . 497
TimeStruct type definition . . . 497
Trigonometry Library . . . 498
Library Routines . . . 498
sinE3 . . . 498
cosE3 . . . 499

CHAPTER 1

Introduction to *mikroBasic PRO for AVR*

The *mikroBasic PRO for AVR* is a powerful, feature-rich development tool for AVR microcontrollers. It is designed to provide the programmer with the easiest possible solution to developing applications for embedded systems, without compromising performance or control.

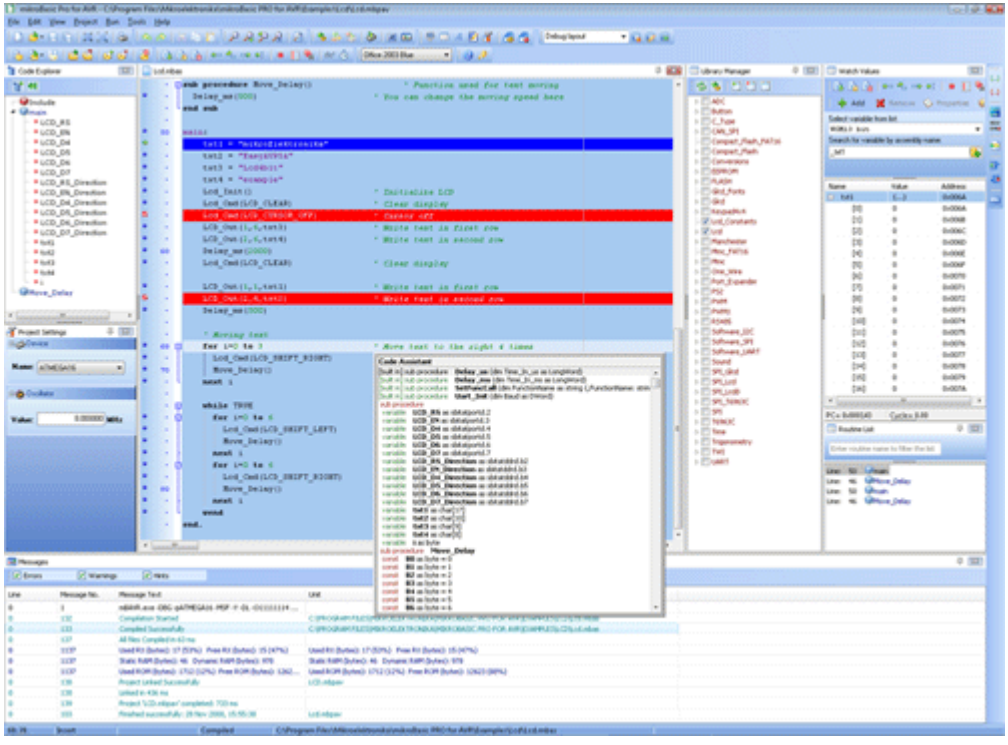

mikroBasic PRO for AVR IDE

Features

mikroBasic PRO for AVR allows you to quickly develop and deploy complex applications:

- Write your Basic source code using the built-in Code Editor (Code and Parameter Assistants, Code Folding, Syntax Highlighting, Spell Checker, Auto Correct, Code Templates, and more.)
- Use included mikroBasic PRO libraries to dramatically speed up the development: data acquisition, memory, displays, conversions, communication etc.
- Monitor your program structure, variables, and functions in the Code Explorer.
- Generate commented, human-readable assembly, and standard HEX compatible with all programmers.
- Inspect program flow and debug executable logic with the integrated Software Simulator.
- Get detailed reports and graphs: RAM and ROM map, code statistics, assembly listing, calling tree, and more.
- mikroBasic PRO for AVR provides plenty of examples to expand, develop, and use as building bricks in your projects. Copy them entirely if you deem fit – that's why we included them with the compiler.

Where to Start

- In case that you're a beginner in programming AVR microcontrollers, read carefully the AVR Specifics chapter. It might give you some useful pointers on AVR constraints, code portability, and good programming practices.

- If you are experienced in Basic programming, you will probably want to consult mikroBasic PRO for AVR Specifics first. For language issues, you can always refer to the comprehensive Language Reference. A complete list of included libraries is available at mikroBasic PRO for AVR Libraries.

- If you are not very experienced in Basic programming, don't panic! mikroBasic PRO for AVR provides plenty of examples making it easy for you to go quickly. We suggest that you first consult Projects and Source Files, and then start browsing the examples that you're the most interested in.

MIKROELEKTRONIKA ASSOCIATES LICENSE STATEMENT AND LIMITED WARRANTY

IMPORTANT - READ CAREFULLY

This license statement and limited warranty constitute a legal agreement (“License Agreement”) between you (either as an individual or a single entity) and mikroElektronika (“mikroElektronika Associates”) for software product (“Software”) identified above, including any software, media, and accompanying on-line or printed documentation.

BY INSTALLING, COPYING, OR OTHERWISE USING SOFTWARE, YOU AGREE TO BE BOUND BY ALL TERMS AND CONDITIONS OF THE LICENSE AGREEMENT.

Upon your acceptance of the terms and conditions of the License Agreement, mikroElektronika Associates grants you the right to use Software in a way provided below.

This Software is owned by mikroElektronika Associates and is protected by copyright law and international copyright treaty. Therefore, you must treat this Software like any other copyright material (e.g., a book).

You may transfer Software and documentation on a permanent basis provided. You retain no copies and the recipient agrees to the terms of the License Agreement. Except as provided in the License Agreement, you may not transfer, rent, lease, lend, copy, modify, translate, sublicense, time-share or electronically transmit or receive Software, media or documentation. You acknowledge that Software in the source code form remains a confidential trade secret of mikroElektronika Associates and therefore you agree not to modify Software or attempt to reverse engineer, decompile, or disassemble it, except and only to the extent that such activity is expressly permitted by applicable law notwithstanding this limitation.

If you have purchased an upgrade version of Software, it constitutes a single product with the mikroElektronika Associates software that you upgraded. You may use the upgrade version of Software only in accordance with the License Agreement.

LIMITED WARRANTY

Respectfully excepting the Redistributables, which are provided “as is”, without warranty of any kind, mikroElektronika Associates warrants that Software, once updated and properly used, will perform substantially in accordance with the accompanying documentation, and Software media will be free from defects in materials and workmanship, for a period of ninety (90) days from the date of receipt. Any implied warranties on Software are limited to ninety (90) days.

mikroElektronika Associates’ and its suppliers’ entire liability and your exclusive remedy shall be, at mikroElektronika Associates’ option, either (a) return of the price paid, or (b) repair or replacement of Software that does not meet mikroElektronika Associates’ Limited Warranty and which is returned to mikroElektronika Associates with a copy of your receipt. DO NOT RETURN ANY PRODUCT UNTIL YOU HAVE CALLED MIKROELEKTRONIKA ASSOCIATES FIRST AND OBTAINED A RETURN AUTHORIZATION NUMBER. This Limited Warranty is void if failure of Software has resulted from an accident, abuse, or misapplication. Any replacement of Software will be warranted for the rest of the original warranty period or thirty (30) days, whichever is longer.

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, MIKROELEKTRONIKA ASSOCIATES AND ITS SUPPLIERS DISCLAIM ALL OTHER WARRANTIES AND CONDITIONS, EITHER EXPRESSED OR IMPLIED, INCLUDED, BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, AND NON-INFRINGEMENT, WITH REGARD TO SOFTWARE, AND THE PROVISION OF OR FAILURE TO PROVIDE SUPPORT SERVICES.

IN NO EVENT SHALL MIKROELEKTRONIKA ASSOCIATES OR ITS SUPPLIERS BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT, OR CONSEQUENTIAL DAMAGES WHATSOEVER (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF BUSINESS PROFITS AND BUSINESS INFORMATION, BUSINESS INTERRUPTION, OR ANY OTHER PECUNIARY LOSS) ARISING OUT OF THE USE OF OR INABILITY TO USE SOFTWARE PRODUCT OR THE PROVISION OF OR FAILURE TO PROVIDE SUPPORT SERVICES, EVEN IF MIKROELEKTRONIKA ASSOCIATES HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. IN ANY CASE, MIKROELEKTRONIKA ASSOCIATES’ ENTIRE LIABILITY UNDER ANY PROVISION OF THIS LICENSE AGREEMENT SHALL BE LIMITED TO THE AMOUNT ACTUALLY PAID BY YOU FOR SOFTWARE PRODUCT PROVIDED, HOWEVER, IF YOU HAVE ENTERED INTO A MIKROELEKTRONIKA ASSOCIATES SUPPORT SERVICES AGREEMENT, MIKROELEKTRONIKA ASSOCIATES’ ENTIRE LIABILITY REGARDING SUPPORT SERVICES SHALL BE GOVERNED BY THE TERMS OF THAT AGREEMENT.

HIGH RISK ACTIVITIES

Software is not fault-tolerant and is not designed, manufactured or intended for use or resale as on-line control equipment in hazardous environments requiring fail-safe performance, such as in the operation of nuclear facilities, aircraft navigation or communication systems, air traffic control, direct life support machines, or weapons systems, in which the failure of Software could lead directly to death, personal injury, or severe physical or environmental damage ("High Risk Activities"). mikroElektronika Associates and its suppliers specifically disclaim any expressed or implied warranty of fitness for High Risk Activities.

GENERAL PROVISIONS

This statement may only be modified in writing signed by you and an authorised officer of mikroElektronika Associates. If any provision of this statement is found void or unenforceable, the remainder will remain valid and enforceable according to its terms. If any remedy provided is determined to have failed for its essential purpose, all limitations of liability and exclusions of damages set forth in the Limited Warranty shall remain in effect.

This statement gives you specific legal rights; you may have others, which vary, from country to country. mikroElektronika Associates reserves all rights not specifically granted in this statement.

mikroElektronika
Visegradska 1A,
11000 Belgrade,
Europe.

Phone: + 381 11 36 28 830
Fax: +381 11 36 28 831
Web: www.mikroe.com
E-mail: office@mikroe.com

TECHNICAL SUPPORT

In case you encounter any problem, you are welcome to our support forums at www.mikroe.com/forum/. Here, you may also find helpful information, hardware tips, and practical code snippets. Your comments and suggestions on future development of the mikroBasic PRO for AVR are always appreciated — feel free to drop a note or two on our Wishlist.

In our Knowledge Base www.mikroe.com/en/kb/ you can find the answers to Frequently Asked Questions and solutions to known problems. If you can not find the solution to your problem in Knowledge Base then report it to Support Desk www.mikroe.com/en/support/. In this way, we can record and track down bugs more efficiently, which is in our mutual interest. We respond to every bug report and question in a suitable manner, ever improving our technical support.

HOW TO REGISTER

The latest version of the mikroBasic PRO for AVR is always available for downloading from our website. It is a fully functional software libraries, examples, and comprehensive help included.

The only limitation of the free version is that it cannot generate hex output over 2 KB. Although it might sound restrictive, this margin allows you to develop practical, working applications with no thinking of demo limit. If you intend to develop really complex projects in the mikroBasic PRO for AVR, then you should consider the possibility of purchasing the license key.

Who Gets the License Key

Buyers of the mikroBasic PRO for AVR are entitled to the license key. After you have completed the payment procedure, you have an option of registering your mikroBasic PRO. In this way you can generate hex output without any limitations.

How to Get License Key

After you have completed the payment procedure, start the program. Select **Help › How to Register** from the drop-down menu or click the How To Register Icon . Fill out the registration form (figure below), select your distributor, and click the Send button.

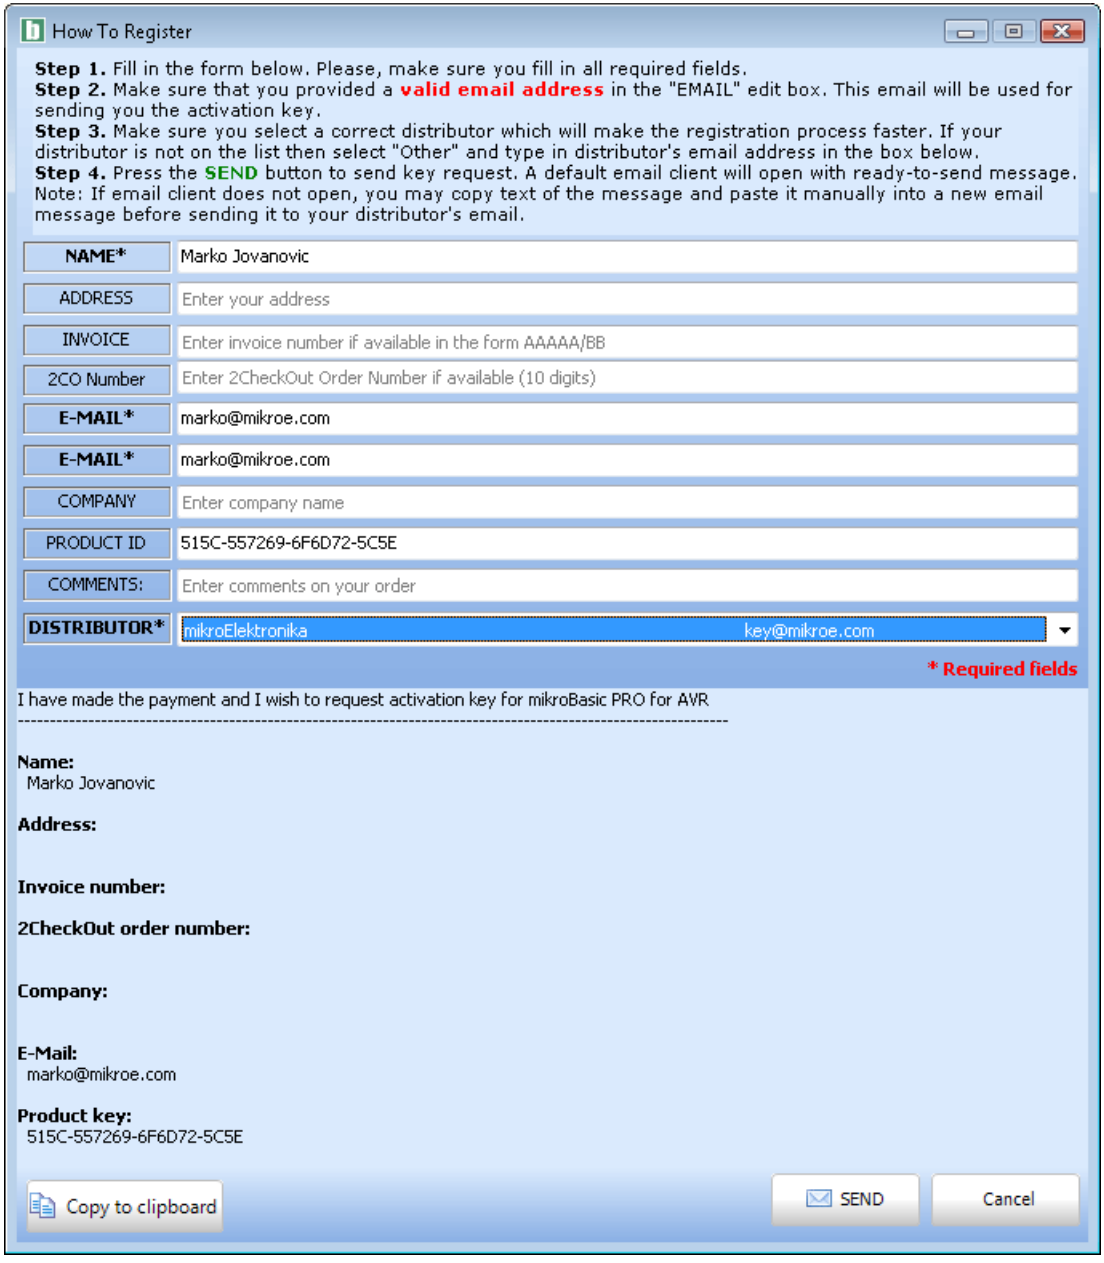
How To Register
Step 1. Fill in the form below. Please, make sure you fill in all required fields.
Step 2. Make sure that you provided a valid email address in the "EMAIL" edit box. This email will be used for sending you the activation key.
Step 3. Make sure you select a correct distributor which will make the registration process faster. If your distributor is not on the list then select "Other" and type in distributor's email address in the box below.
Step 4. Press the SEND button to send key request. A default email client will open with ready-to-send message. Note: If email client does not open, you may copy text of the message and paste it manually into a new email message before sending it to your distributor's email.
NAME*
Marko Jovanovic
ADDRESS
Enter your address
INVOICE
Enter invoice number if available in the form AAAAA/BB
2CO Number
Enter 2CheckOut Order Number if available (10 digits)
E-MAIL*
marko@mikroe.com
E-MAIL*
marko@mikroe.com
COMPANY
Enter company name
PRODUCT ID
515C-557269-6F6D72-5C5E
COMMENTS:
Enter comments on your order
DISTRIBUTOR*
mikroElektronika key@mikroe.com
* Required fields
I have made the payment and I wish to request activation key for mikroBasic PRO for AVR
Name:
Marko Jovanovic
Address:
Invoice number:
2CheckOut order number:
Company:
E-Mail:
marko@mikroe.com
Product key:
515C-557269-6F6D72-5C5E
Copy to clipboard
SEND
Cancel

This will start your e-mail client with message ready for sending. Review the information you have entered, and add the comment if you deem it necessary. Please, do not modify the subject line.

Upon receiving and verifying your request, we will send the license key to the e-mail address you specified in the form.

After Receving the License Key

The license key comes as a small autoextracting file – just start it anywhere on your computer in order to activate your copy of compiler and remove the demo limit. You do not need to restart your computer or install any additional components. Also, there is no need to run the mikroBasic PRO for AVR at the time of activation.

Notes:

- The license key is valid until you format your hard disk. In case you need to format the hard disk, you should request a new activation key.
- Please keep the activation program in a safe place. Every time you upgrade the compiler you should start this program again in order to reactivate the license.

CHAPTER 2

mikroBasic PRO for AVR Environment

The mikroBasic PRO for AVR is an user-friendly and intuitive environment:

IDE OVERVIEW

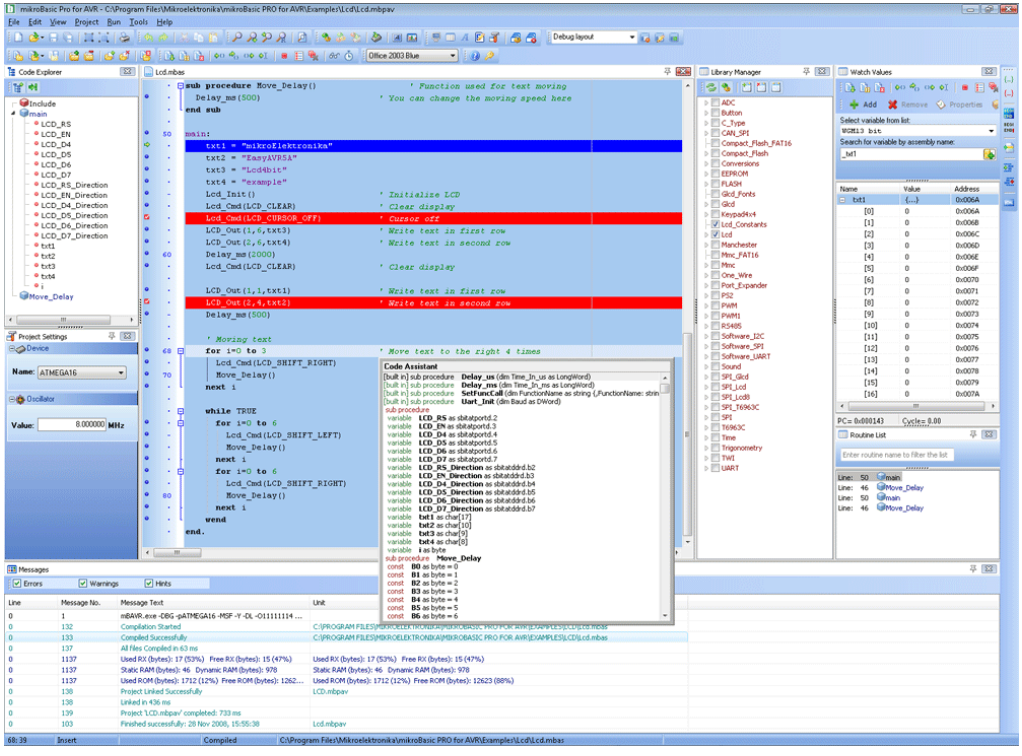

- The Code Editor features adjustable Syntax Highlighting, Code Folding, Code Assistant, Parameters Assistant, Spell Checker, Auto Correct for common typos and Code Templates (Auto Complete).
- The Code Explorer (with Keyboard shortcut browser and Quick Help browser) is at your disposal for easier project management.
- The Project Manager alows multiple project management
- General project settings can be made in the Project Settings window
- Library manager enables simple handling libraries being used in a project
- The Error Window displays all errors detected during compiling and linking.
- The source-level Software Simulator lets you debug executable logic step-by-step by watching the program flow.
- The New Project Wizard is a fast, reliable, and easy way to create a project.
- Help files are syntax and context sensitive.
- Like in any modern Windows application, you may customize the layout of mikroBasic PRO for AVR to suit your needs best.
- Spell checker underlines identifiers which are unknown to the project. In this way it helps the programmer to spot potential problems early, much before the project is compiled.
  Spell checker can be disabled by choosing the option in the Preferences dialog (F12).

MAIN MENU OPTIONS

Available Main Menu options are:



Related topics: Keyboard shortcuts

FILE MENU OPTIONS

The File menu is the main entry point for manipulation with the source files.

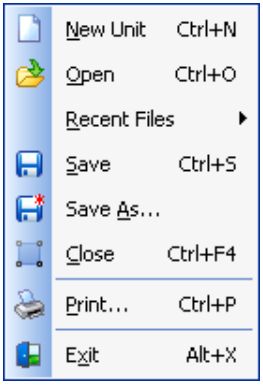

File	Description
New Unit Ctrl+N	Open a new editor window.
Open Ctrl+O	Open source file for editing or image file for viewing.
Recent Files	Reopen recently used file.
Save Ctrl+S	Save changes for active editor.
Save As...	Save the active source file with the different name or change the file type.
Close Alt+F4	Close active source file.
Print... Ctrl+P	Print Preview.
Exit Alt+X	Exit IDE.

Related topics: Keyboard shortcuts, File Toolbar, Managing Source Files

EDIT MENU OPTIONS

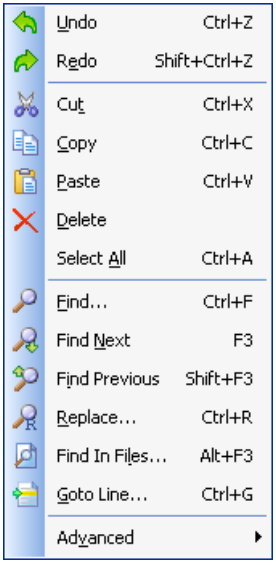

File	Description
Undo Ctrl+Z	Undo last change.
Redo Shift+Ctrl+Z	Redo last change.
Cut Ctrl+X	Cut selected text to clipboard.
Copy Ctrl+C	Copy selected text to clipboard.
Paste Ctrl+V	Paste text from clipboard.
Delete	Delete selected text.
Select All Ctrl+A	Select all text in active editor.
Find... Ctrl+F	Find text in active editor.
Find Next F3	Find next occurence of text in active editor.
Find Previous Shift+F3	Find previous occurence of text in active editor.
Replace... Ctrl+R	Replace text in active editor.
Find In Files... Alt+F3	Find text in current file, in all opened files, or in files from desired folder.
Goto Line... Ctrl+G	Goto to the desired line in active editor.
Advanced	Advanced Code Editor options

File	Description
{..} Comment Shift+Ctrl+.	Comment selected code or put single line comment if there is no selection.
{..} Uncomment Shift+Ctrl+,	Uncomment selected code or remove single line comment if there is no selection.
Indent Shift+Ctrl+I	Indent selected code.
Outdent Shift+Ctrl+U	Outdent selected code.
Aa Lowercase Ctrl+Alt+L	Changes selected text case to lowercase.
aA Uppercase Ctrl+Alt+U	Changes selected text case to uppercase.
Aa Titlecase Ctrl+Alt+T	Changes selected text case to titlercase.

Find Text

Dialog box for searching the document for the specified text. The search is performed in the direction specified. If the string is not found a message is displayed.

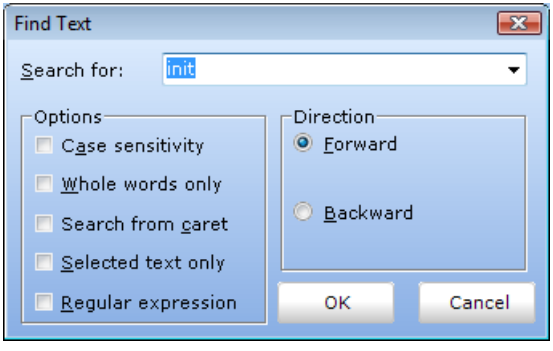

Find In Files

Dialog box for searching for a text string in current file, all opened files, or in files on a disk.

The string to search for is specified in the **Text to find** field. If Search in directories option is selected, The files to search are specified in the **Files mask** and Path fields.

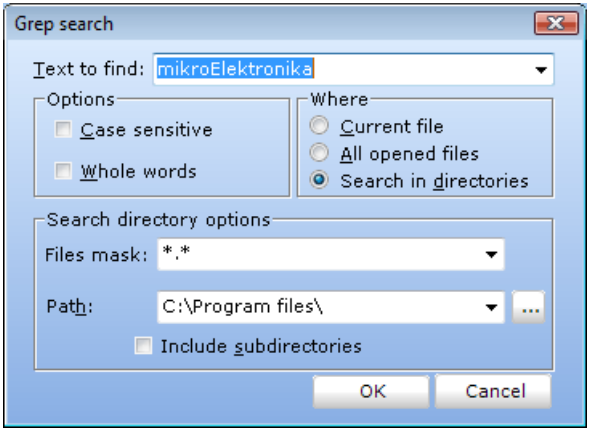

Go To Line

Dialog box that allows the user to specify the line number at which the cursor should be positioned.



Regular expressions

By checking this box, you will be able to advance your search, through Regular expressions.

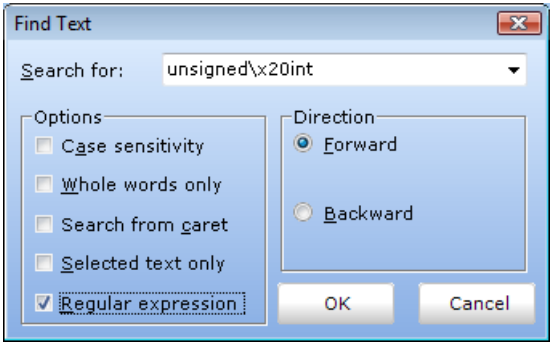

Related topics: Keyboard shortcuts, Edit Toolbar, Advanced Edit Toolbar

VIEW MENU OPTIONS

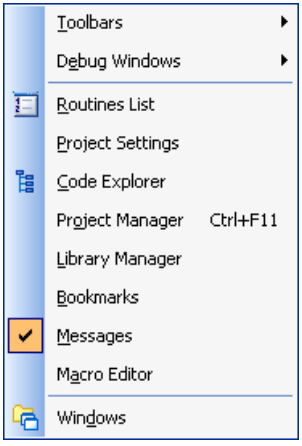

File	Description
Toolbars	Show/Hide toolbars.
Debug Windows	Show/Hide debug windows.
Routines List	Show/Hide Routine List in active editor.
Project Settings	Show/Hide Project Settings window.
Code Explorer	Show/Hide Code Explorer window.
Project Manager Shift+Ctrl+F11	Show/Hide Project Manager window.
Library Manager	Show/Hide Library Manager window.
Bookmarks	Show/Hide Bookmarks window.
Messages	Show/Hide Error Messages window.
Macro Editor	Show/Hide Macro Editor window.
Windows	Show Window List window.

TOOLBARS

File Toolbar

File Toolbar is a standard toolbar with following options:

Icon	Description
	Opens a new editor window.
	Open source file for editing or image file for viewing.
	Save changes for active window.
	Save changes in all opened windows.
	Close current editor.
	Close all editors.
	Print Preview.

Edit Toolbar

Edit Toolbar is a standard toolbar with following options:

Icon	Description
	Undo last change.
	Redo last change.
	Cut selected text to clipboard.
	Copy selected text to clipboard.
	Paste text from clipboard.

Advanced Edit Toolbar

Advanced Edit Toolbar comes with following options:

Icon	Description
	Comment selected code or put single line comment if there is no selection
	Uncomment selected code or remove single line comment if there is no selection.
	Select text from starting delimiter to ending delimiter.
	Go to ending delimiter.
	Go to line.
	Indent selected code lines.
	Outdent selected code lines.
	Generate HTML code suitable for publishing current source code on the web.

Find/Replace Toolbar

Find/Replace Toolbar is a standard toolbar with following options:

Icon	Description
	Find text in current editor.
	Find next occurence.
	Find previous occurence.
	Replace text.
	Find text in files.

Project Toolbar

Project Toolbar comes with following options:

Icon	Description
	Open new project wizard. wizard.
	Open Project
	Save Project
	Add existing project to project group.
	Remove existing project from project group.
	Add File To Project
	Remove File From Project
	Close current project.

Build Toolbar

Build Toolbar comes with following options:

Icon	Description
	Build current project.
	Build all opened projects.
	Build and program active project.
	Start programmer and load current HEX file.
	Open assembly code in editor.
	View statistics for current project.

Debugger

Debugger Toolbar comes with following options:

Icon	Description
	Start Software Simulator.
	Run/Pause debugger.
	Stop debugger.
	Step into.
	Step over.
	Step out.
	Run to cursor.
	Toggle breakpoint.
	Toggle breakpoints.
	Clear breakpoints.
	View watch window
	View stopwatch window

Styles Toolbar



Styles toolbar allows you to easily customize your workspace.

Tools Toolbar

Tools Toolbar comes with following default options:

Icon	Description
	Run USART Terminal
	EEPROM
	ASCII Chart
	Seven segment decoder tool.

The Tools toolbar can easily be customized by adding new tools in Options(F12) window.

Related topics: Keyboard shortcuts, Integrated Tools, Debugger Windows

PROJECT MENU OPTIONS

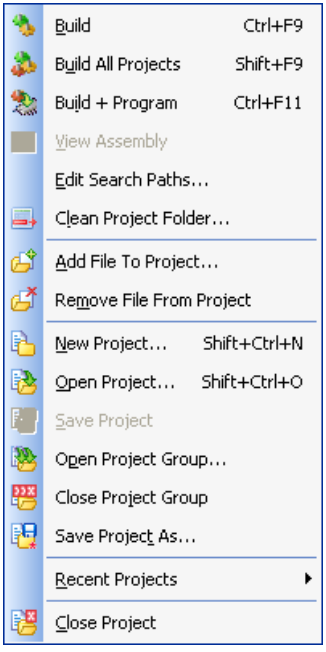

Project	Description
Build Ctrl+F9	Build active project.
Build All Shift+F9	Build all projects.
Build + Program Ctrl+F11	Build and program active project.
View Assembly	View Assembly.
Edit Search Paths...	Edit search paths.
Clean Project Folder...	Clean Project Folder
Add File To Project...	Add file to project.
Remove File From Project	Remove file from project.
New Project...	Open New Project Wizard
Open Project... Shift+Ctrl+O	Open existing project.
Save Project	Save current project.
Open Project Group...	Open project group.
Close Project Group	Close project group.
Save Project As...	Save active project file with the different name.
Recent Projects ▸	Open recently used project.
Close Project	Close active project.

Related topics: Keyboard shortcuts, Project Toolbar, Creating New Project, Project Manager, Project Settings

RUN MENU OPTIONS

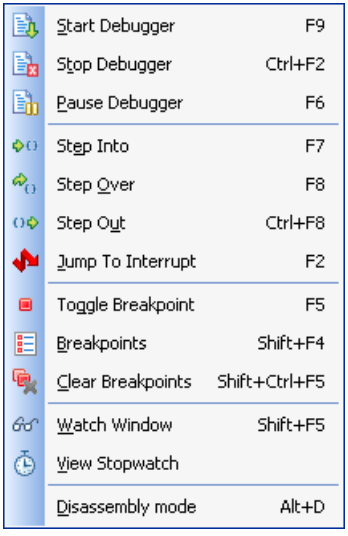

File	Description
Start Debugger F9	Start Software Simulator.
Stop Debugger Ctrl+F2	Stop debugger.
Pause Debugger F6	Pause Debugger.
Step Into F7	Step Into.
Step Over F8	Step Over.
Step Out Ctrl+F8	Step Out.
Jump To Interrupt F2	Jump to interrupt in current project.
Toggle Breakpoint F5	Toggle Breakpoint.
Show/Hide Breakpoints Shift+F4	Breakpoints.
Clear Breakpoints Shift+Ctrl+F5	Clear Breakpoints.
Watch Window Shift+F5	Show/Hide Watch Window
View Stopwatch	Show/Hide Stopwatch Window
Disassembly mode Ctrl+D	Toggle between Basic source and disassembly.

Related topics: Keyboard shortcuts, Debug Toolbar

TOOLS MENU OPTIONS

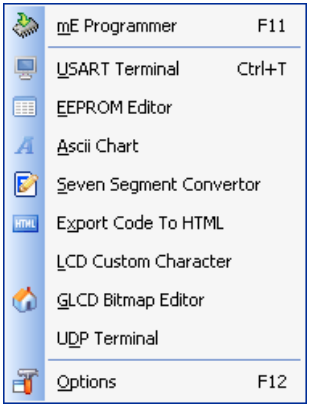

Tools	Description
mE Programmer F11	Run mikroElektronika Programmer
USART Terminal Ctrl+T	Run USART Terminal
EEPROM Editor	Run EEPROM Editor
Ascii Chart	Run ASCII Chart
Seven Segment Convertor	Run 7 Segment Display Decoder
Export Code To HTML	Generate HTML code suitable for publishing source code on the web.
LCD Custom Character	Generate your own custom Lcd characters
GLCD Bitmap Editor	Generate bitmap pictures for Glcd
UDP Terminal	UDP communication terminal.
Options F12	Open Options window

Related topics: Keyboard shortcuts, Tools Toolbar

HELP MENU OPTIONS

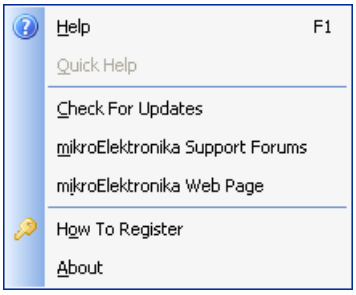

File	Description
Help F1	Open Help File.
Quick Help	Quick Help.
Check For Updates	Check if new compiler version is available.
mikroElektronika Support Forums	Open mikroElektronika Support Forums in a default browser.
mikroElektronika Web Page	Open mikroElektronika Web Page in a default browser.
How To Register	Information on how to register
About	Open About window.

Related topics: Keyboard shortcuts

KEYBOARD SHORTCUTS

Below is a complete list of keyboard shortcuts available in mikroBasic PRO for AVR IDE. You can also view keyboard shortcuts in the Code Explorer window, tab Keyboard.

IDE Shortcuts	
F1	Help
Ctrl+N	New Unit
Ctrl+O	Open
Ctrl+Shift+O	Open Project
Ctrl+Shift+N	Open New Project
Ctrl+K	Close Project
Ctrl+F9	Compile
Shift+F9	Compile All
Ctrl+F11	Compile and Program
Shift+F4	View breakpoints
Ctrl+Shift+F5	Clear breakpoints
F11	Start AVRFlash Programmer
F12	Preferences
Basic Editor Shortcuts	
F3	Find, Find Next
Shift+F3	Find Previous
Alt+F3	Grep Search, Find in Files
Ctrl+A	Select All
Ctrl+C	Copy
Ctrl+F	Find
Ctrl+R	Replace
Ctrl+P	Print
Ctrl+S	Save unit
Ctrl+Shift+S	Save All
Ctrl+V	Paste
Ctrl+X	Cut
Ctrl+Y	Delete entire line
Ctrl+Z	Undo
Ctrl+Shift+Z	Redo
Advanced Editor Shortcuts	
Ctrl+Space	Code Assistant
Ctrl+Shift+Space	Parameters Assistant
Ctrl+D	Find declaration
Ctrl+E	Incremental Search
Ctrl+L	Routine List
Ctrl+G	Goto line
Ctrl+J	Insert Code Template
Ctrl+Shift+.	Comment Code
Ctrl+Shift+,	Uncomment Code
Ctrl+number	Goto bookmark
Ctrl+Shift+number	Set bookmark
Ctrl+Shift+I	Indent selection
Ctrl+Shift+U	Unindent selection
TAB	Indent selection
Shift+TAB	Unindent selection
Alt+Select	Select columns
Ctrl+Alt+Select	Select columns
Ctrl+Alt+L	Convert selection to lowercase
Ctrl+Alt+U	Convert selection to uppercase
Ctrl+Alt+T	Convert to Titlecase

Software Simulator Shortcuts	
F2	Jump To Interrupt
F4	Run to Cursor
F5	Toggle Breakpoint
F6	Run/Pause Debugger
F7	Step into
F8	Step over
F9	Debug
Ctrl+F2	Reset
Ctrl+F5	Add to Watch List
Ctrl+F8	Step out
Alt+D	Dissasembly view
Shift+F5	Open Watch Window

IDE OVERVIEW

The mikroBasic PRO for AVR is an user-friendly and intuitive environment:

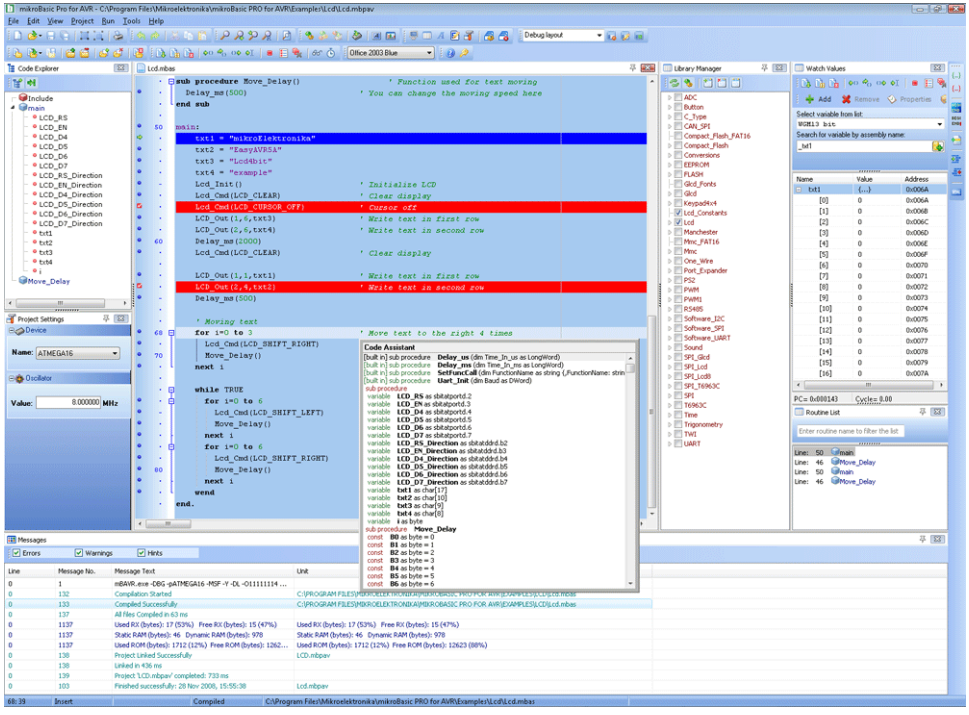

- The Code Editor features adjustable Syntax Highlighting, Code Folding, Code Assistant, Parameters Assistant, Spell Checker, Auto Correct for common typos and Code Templates (Auto Complete).
- The Code Explorer (with Keyboard shortcut browser and Quick Help browser) is at your disposal for easier project management.
- The Project Manager alows multiple project management
- General project settings can be made in the Project Settings window
- Library manager enables simple handling libraries being used in a project
- The Error Window displays all errors detected during compiling and linking.
- The source-level Software Simulator lets you debug executable logic step-by-step by watching the program flow.
- The New Project Wizard is a fast, reliable, and easy way to create a project.
- Help files are syntax and context sensitive.
- Like in any modern Windows application, you may customize the layout of mikroBasic PRO for AVR to suit your needs best.
- Spell checker underlines identifiers which are unknown to the project. In this way it helps the programmer to spot potential problems early, much before the project is compiled.
  Spell checker can be disabled by choosing the option in the Preferences dialog (F12).

CUSTOMIZING IDE LAYOUT

Docking Windows

You can increase the viewing and editing space for code, depending on how you arrange the windows in the IDE.

Step 1: Click the window you want to dock, to give it focus.

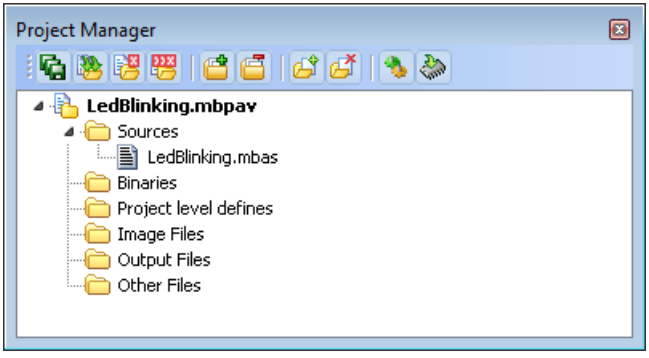

Step 2: Drag the tool window from its current location. A guide diamond appears. The four arrows of the diamond point towards the four edges of the IDE.

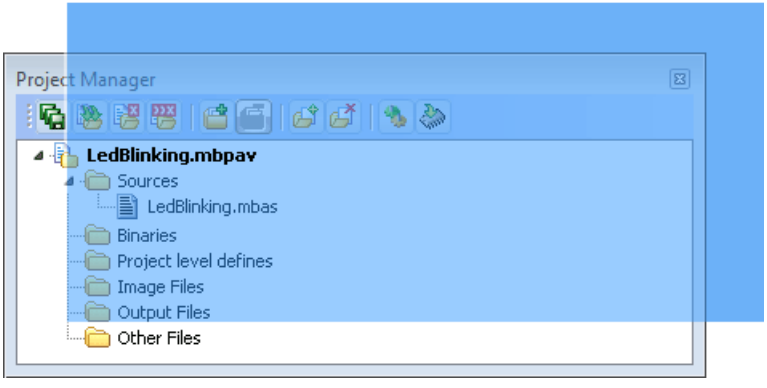

Step 3: Move the pointer over the corresponding portion of the guide diamond. An outline of the window appears in the designated area.

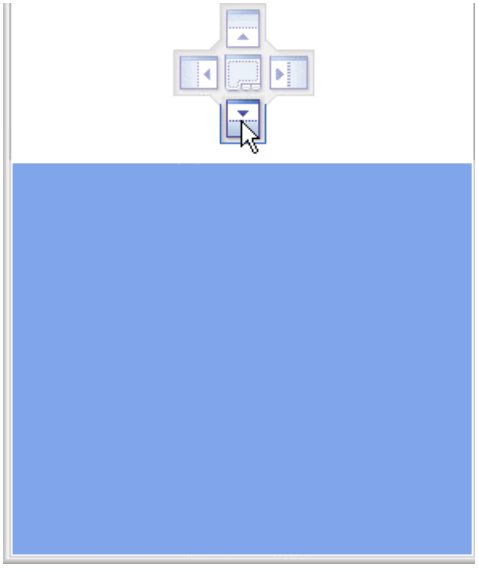

Step 4: To dock the window in the position indicated, release the mouse button.

Tip: To move a dockable window without snapping it into place, press CTRL while dragging it.

Saving Layout

Once you have a window layout that you like, you can save the layout by typing the name for the layout and pressing the Save Layout Icon .

To set the layout select the desired layout from the layout drop-down list and click the Set Layout Icon .

To remove the layout from the drop-down list, select the desired layout from the list and click the Delete Layout Icon .

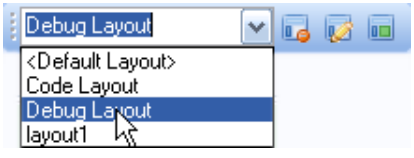

Auto Hide

Auto Hide enables you to see more of your code at one time by minimizing tool windows along the edges of the IDE when not in use.

- Click the window you want to keep visible to give it focus.
- Click the Pushpin Icon on the title bar of the window.

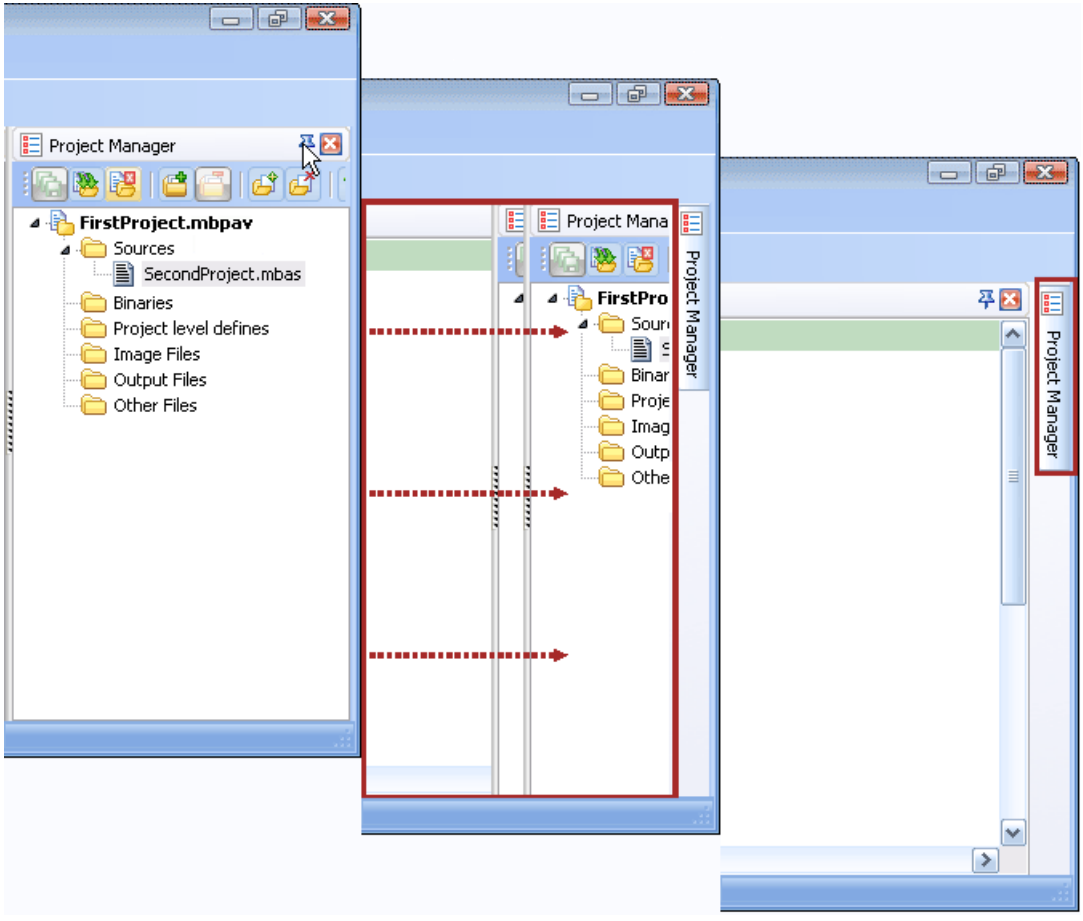

When an auto-hidden window loses focus, it automatically slides back to its tab on the edge of the IDE. While a window is auto-hidden, its name and icon are visible on a tab at the edge of the IDE. To display an auto-hidden window, move your pointer over the tab. The window slides back into view and is ready for use.

ADVANCED CODE EDITOR

The Code Editor is advanced text editor fashioned to satisfy needs of professionals. General code editing is the same as working with any standard text-editor, including familiar Copy, Paste and Undo actions, common for Windows environment.

Advanced Editor Features

- Adjustable Syntax Highlighting
- Code Assistant
- Code Folding
- Parameter Assistant
- Code Templates (Auto Complete)
- Auto Correct for common typos
- Spell Checker
- Bookmarks and Goto Line
- Comment / Uncomment

You can configure the Syntax Highlighting, Code Templates and Auto Correct from the Editor Settings dialog. To access the Settings, click **Tools › Options** from the drop-down menu, click the Show Options Icon or press F12 key.

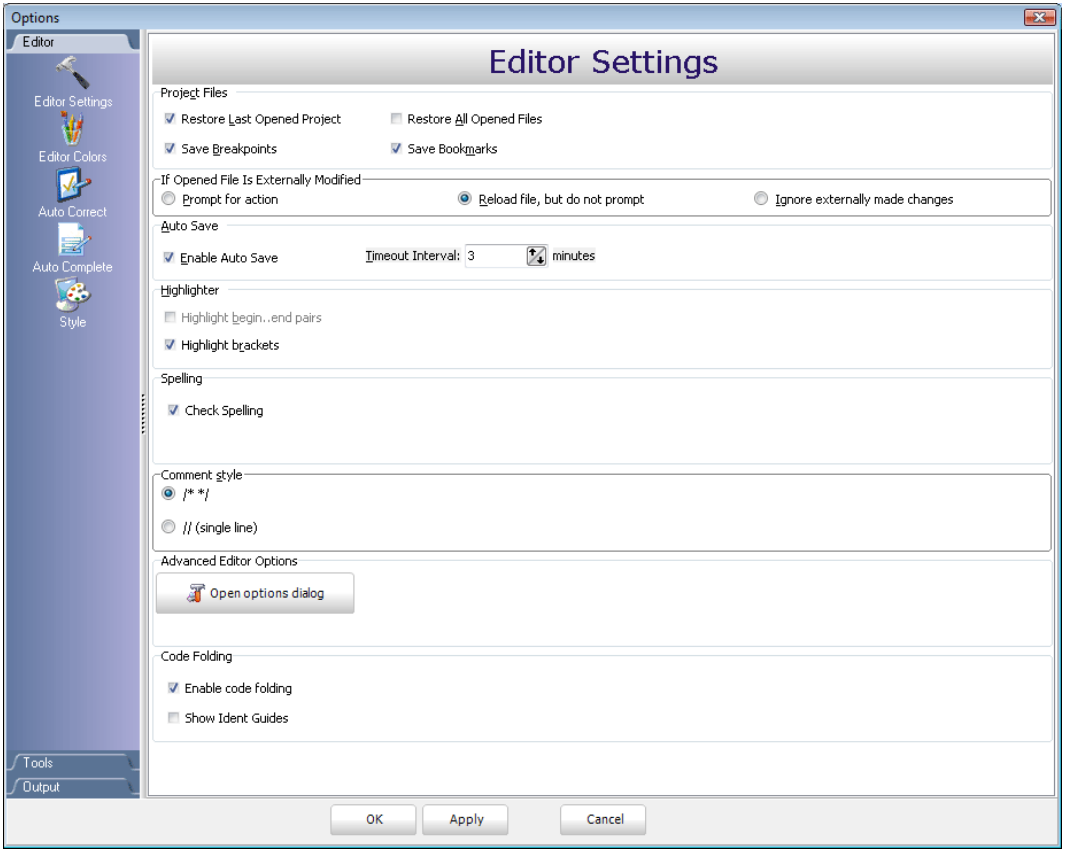

Code Assistant

If you type the first few letters of a word and then press Ctrl+Space, all valid identifiers matching the letters you have typed will be prompted in a floating panel (see the image below). Now you can keep typing to narrow the choice, or you can select one from the list using the keyboard arrows and Enter.

sp
variable sfr unsigned char SP
variable sfr unsigned char SPDR
variable sfr unsigned char SPSR
variable sfr unsigned char SPCR

Code Folding

Code folding is IDE feature which allows users to selectively hide and display sections of a source file. In this way it is easier to manage large regions of code within one window, while still viewing only those subsections of the code that are relevant during a particular editing session.

While typing, the code folding symbols (⊟ and ⊞) appear automatically. Use the folding symbols to hide/unhide the code subsections.

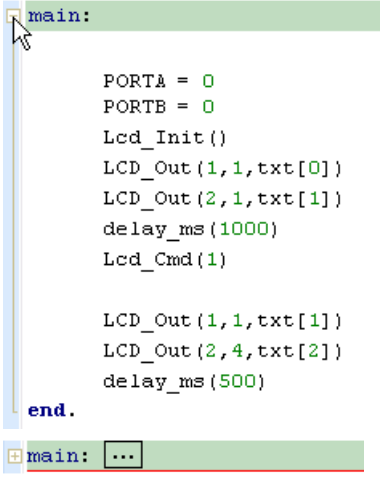

If you place a mouse cursor over the tooltip box, the collapsed text will be shown in a tooltip style box.

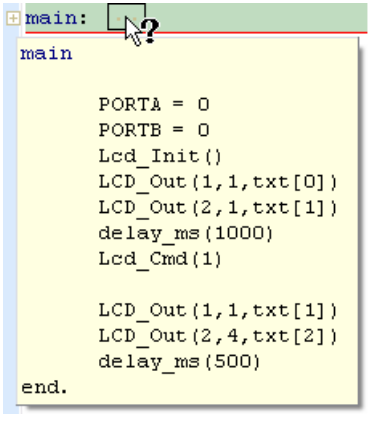

Parameter Assistant

The Parameter Assistant will be automatically invoked when you open parenthesis "(" or press Shift+Ctrl+Space. If the name of a valid function precedes the parenthesis, then the expected parameters will be displayed in a floating panel. As you type the actual parameter, the next expected parameter will become bold.

Code Templates (Auto Complete)

You can insert the Code Template by typing the name of the template (for instance, `whiles`), then press Ctrl+J and the Code Editor will automatically generate a code.

You can add your own templates to the list. Select **Tools › Options** from the drop-down menu, or click the Show Options Icon and then select the Auto Complete Tab. Here you can enter the appropriate keyword, description and code of your template.

Autocomplete macros can retreive system and project information:

- `%DATE%` - current system date
- `%TIME%` - current system time
- `%DEVICE%` - device(MCU) name as specified in project settings
- `%DEVICE_CLOCK%` - clock as specified in project settings
- `%COMPILER%` - current compiler version

These macros can be used in template code, see template `ptemplate` provided with mikroBasic PRO for AVR installation.

Auto Correct

The Auto Correct feature corrects common typing mistakes. To access the list of recognized typos, select **Tools › Options** from the drop-down menu, or click the Show Options Icon and then select the Auto Correct Tab. You can also add your own preferences to the list.

Also, the Code Editor has a feature to comment or uncomment the selected code by simple click of a mouse, using the Comment Icon and Uncomment Icon from the Code Toolbar.

Spell Checker

The Spell Checker underlines unknown objects in the code, so it can be easily noticed and corrected before compiling your project.

Select **Tools › Options** from the drop-down menu, or click the Show Options Icon and then select the Spell Checker Tab.

Bookmarks

Bookmarks make navigation through a large code easier. To set a bookmark, use Ctrl+Shift+number. To jump to a bookmark, use Ctrl+number.

Goto Line

The Goto Line option makes navigation through a large code easier. Use the shortcut Ctrl+G to activate this option.

Comment / Uncomment

Also, the Code Editor has a feature to comment or uncomment the selected code by simple click of a mouse, using the Comment Icon and Uncomment Icon from the Code Toolbar.

CODE EXPLORER

The Code Explorer gives clear view of each item declared inside the source code. You can jump to a declaration of any item by right clicking it. Also, besides the list of defined and declared objects, code explorer displays message about first error and it's location in code.

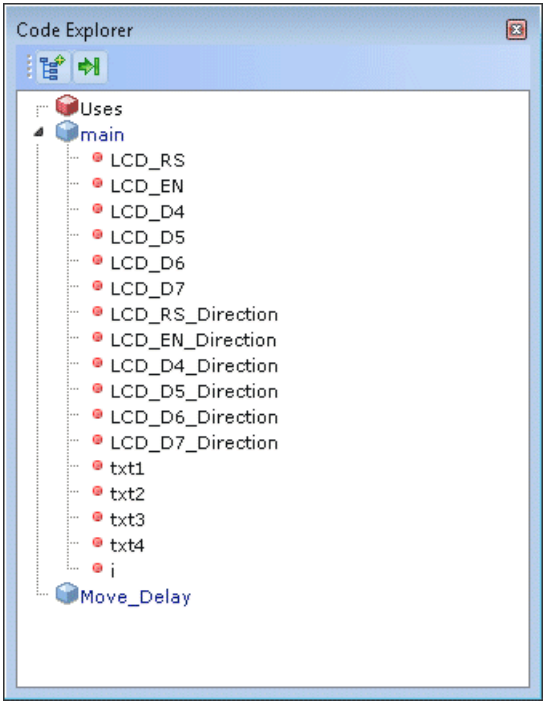

Following options are available in the Code Explorer:

Icon	Description
	Expand/Collapse all nodes in tree.
	Locate declaration in code.

ROUTINE LIST

Routine list diplays list of routines, and enables filtering routines by name. Routine list window can be accessed by pressing Ctrl+L.

You can jump to a desired routine by double clicking on it.

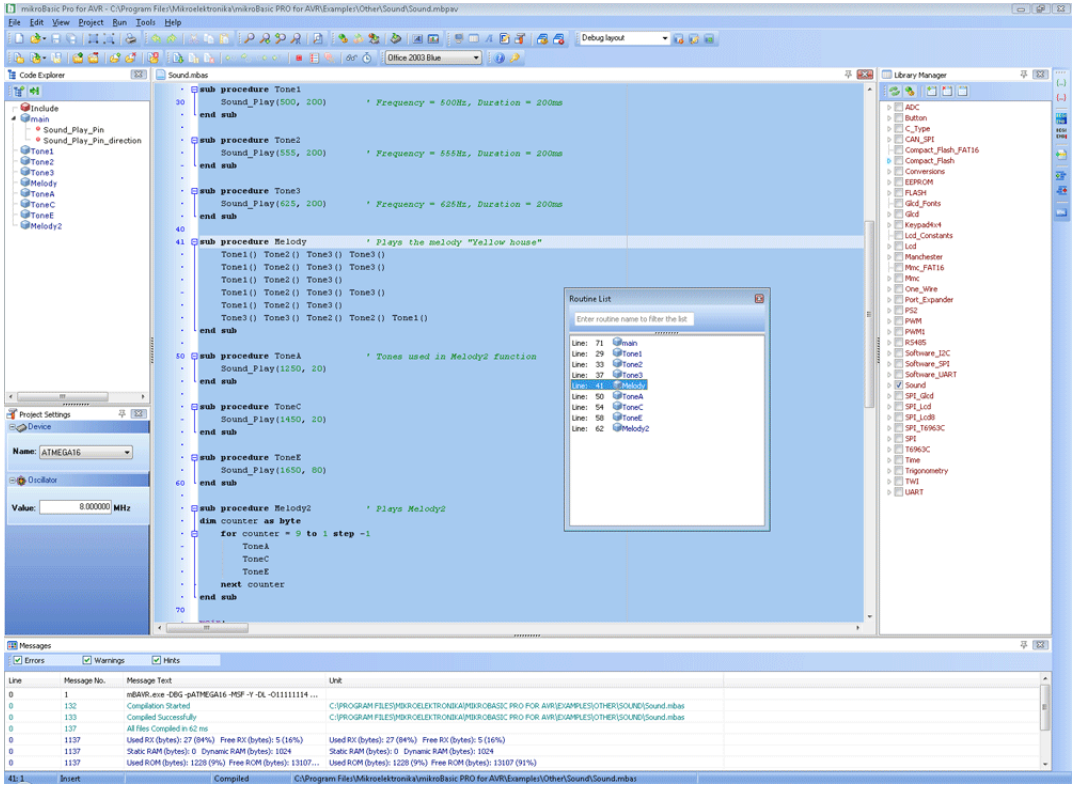

PROJECT MANAGER

Project Manager is IDE feature which allows users to manage multiple projects. Several projects which together make project group may be open at the same time. Only one of them may be active at the moment.
Setting project in **active** mode is performed by **double click** on the desired project in the Project Manager.

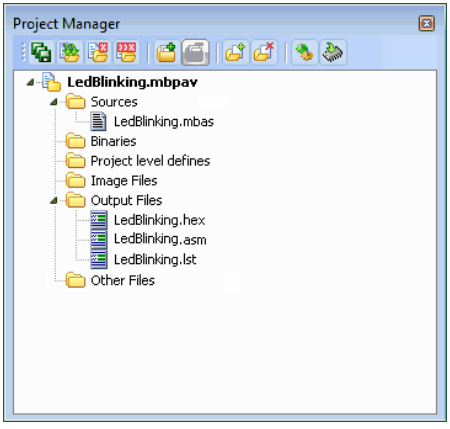

Following options are available in the Project Manager:

Icon	Description
	Save project Group.
	Open project group.
	Close the active project.
	Close project group.
	Add project to the project group.
	Remove project from the project group.
	Add file to the active project.
	Remove selected file from the project.
	Build the active project.
	Run mikroElektronika's Flash programmer.

For details about adding and removing files from project see Add/Remove Files from Project.

Related topics: Project Settings, Project Menu Options, File Menu Options, Project Toolbar, Build Toolbar, Add/Remove Files from Project

PROJECT SETTINGS WINDOW

Following options are available in the Project Settings Window:

- Device - select the appropriate device from the device drop-down list.
- Oscillator - enter the oscillator frequency value.

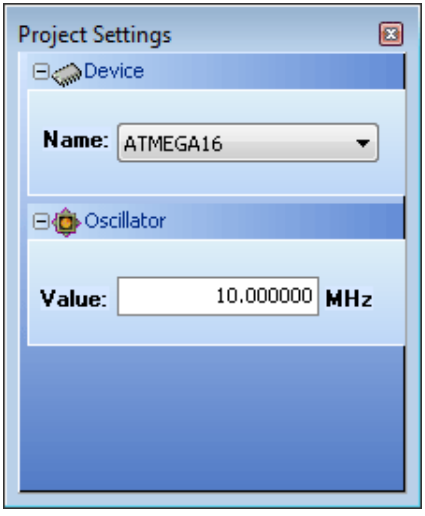

Related topics: Project Manager

LIBRARY MANAGER

Library Manager enables simple handling libraries being used in a project. Library Manager window lists all libraries (extencion `.mcl`) which are instantly stored in the compiler Uses folder. The desirable library is added to the project by selecting check box next to the library name.

In order to have all library functions accessible, simply press the button **Check All** and all libraries will be selected. In case none library is needed in a project, press the button **Clear All** and all libraries will be cleared from the project. Only the selected libraries will be linked.

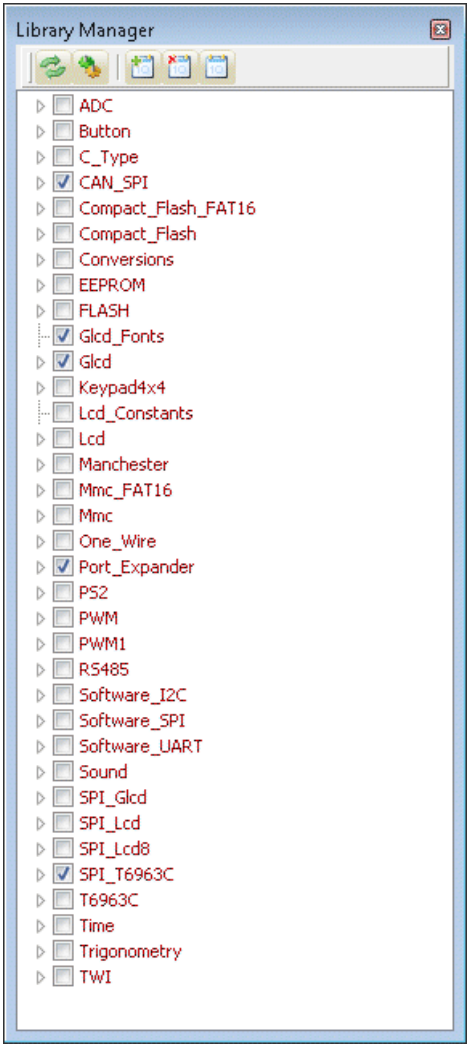

Icon	Description
	Refresh Library by scanning files in "Uses" folder.Useful when new libraries are added by copying files to "Uses" folder.
	Rebuild all available libraries. Useful when library sources are available and need refreshing.
	Include all available libraries in current project.
	No libraries from the list will be included in current project.
	Restore library to the state just before last project saving.

Related topics: mikroBasic PRO for AVR Libraries, Creating New Library

ERROR WINDOW

In case that errors were encountered during compiling, the compiler will report them and won't generate a hex file. The Error Window will be prompted at the bottom of the main window by default.

The Error Window is located under message tab, and displays location and type of errors the compiler has encountered. The compiler also reports warnings, but these do not affect the output; only errors can interefere with the generation of hex.

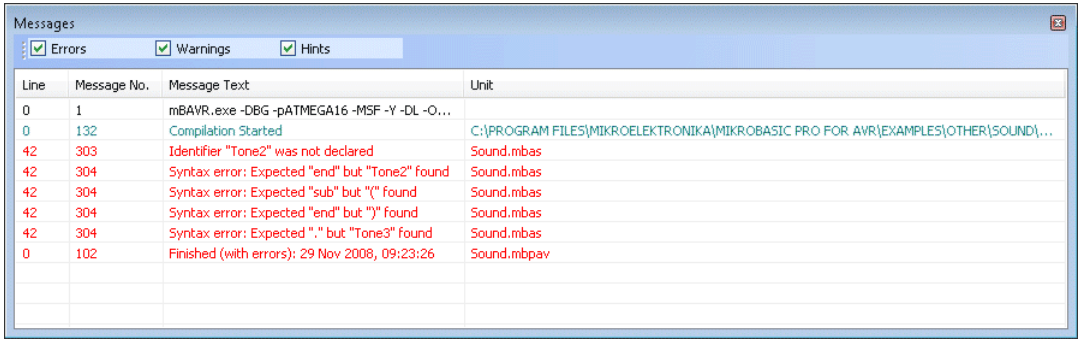
Messages
Errors
Warnings
Hints
Line
Message No.
Message Text
Unit
0 1 mBAVR.exe -DBG -pATMEGA16 -MSF -Y -DL -O...
0 132 Compilation Started C:\PROGRAM FILES\MIKROELEKTRONIKA\MIKROBASIC PRO FOR AVR\EXAMPLES\OTHER\SOUND\...
42 303 Identifier "Tone2" was not declared Sound.mbas
42 304 Syntax error: Expected "end" but "Tone2" found Sound.mbas
42 304 Syntax error: Expected "sub" but "(" found Sound.mbas
42 304 Syntax error: Expected "end" but ")" found Sound.mbas
42 304 Syntax error: Expected "." but "Tone3" found Sound.mbas
0 102 Finished (with errors): 29 Nov 2008, 09:23:26 Sound.mbpav

Double click the message line in the Error Window to highlight the line where the error was encountered.

Related topics: Error Messages

STATISTICS

After successful compilation, you can review statistics of your code. Click the Statistics Icon .

Memory Usage Windows

Provides overview of RAM and ROM usage in the form of histogram.

RAM Memory

Rx Memory Space

Displays Rx memory space usage in form of histogram.

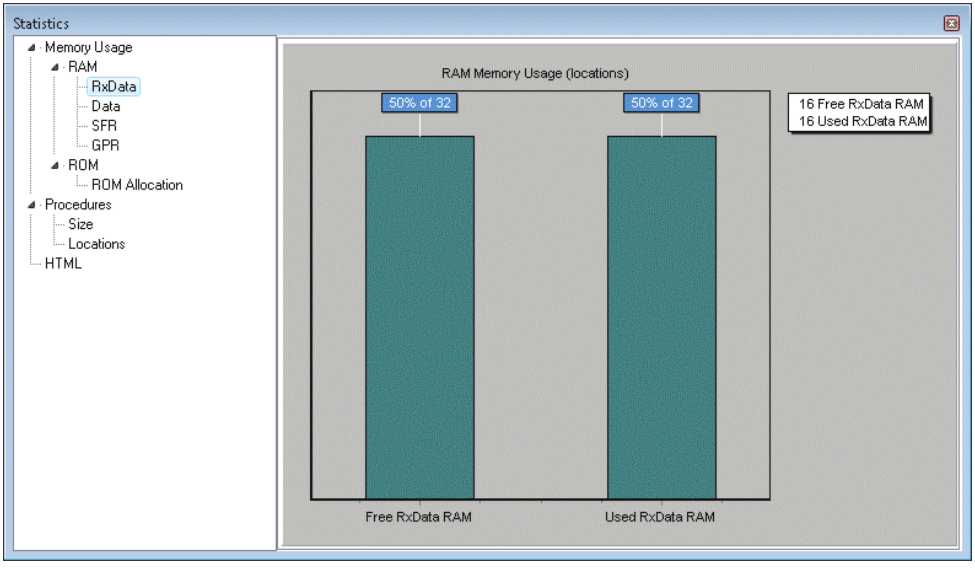

Data Memory Space

Displays Data memory space usage in form of histogram.

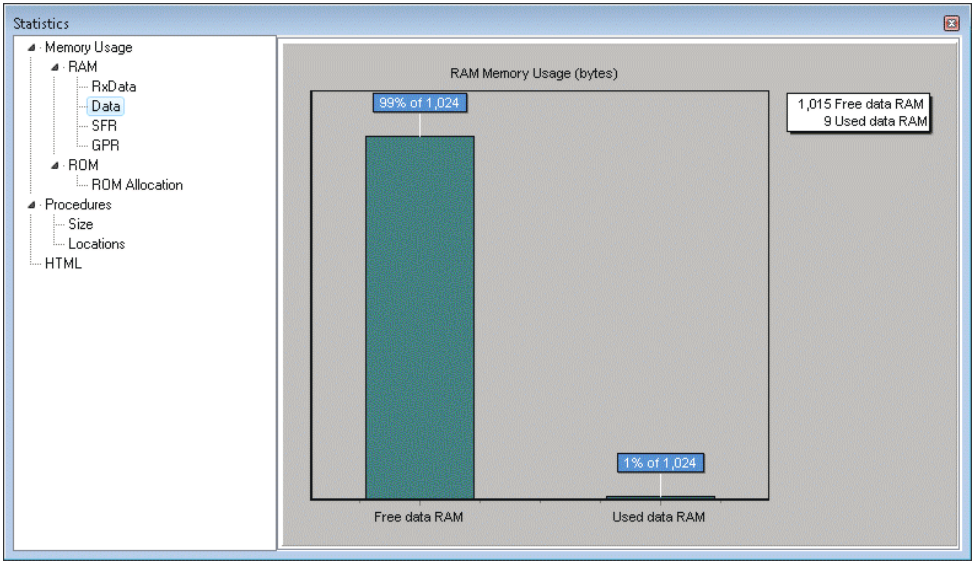

Special Function Registers

Summarizes all Special Function Registers and their addresses.

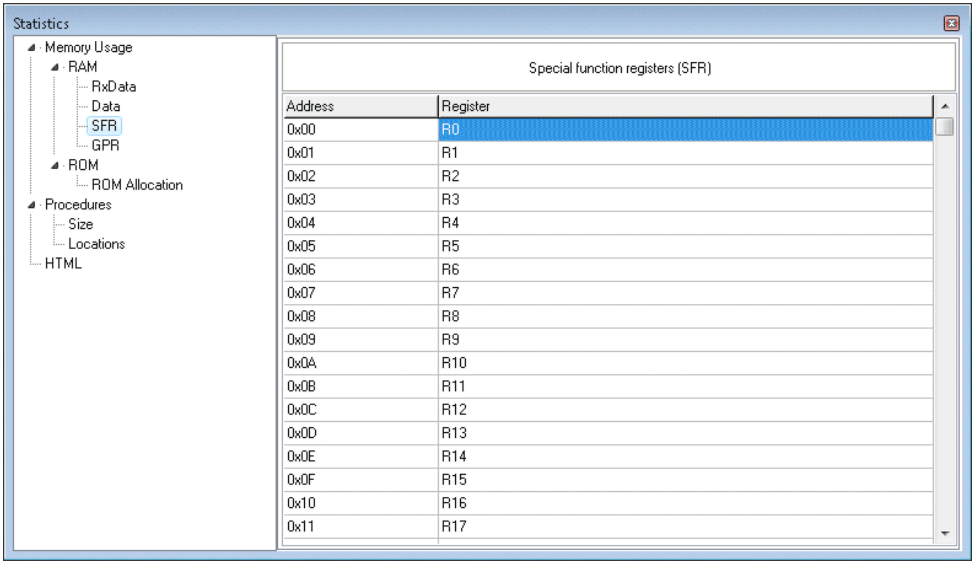

General Purpose Registers

Summarizes all General Purpose Registers and their addresses. Also displays symbolic names of variables and their addresses.

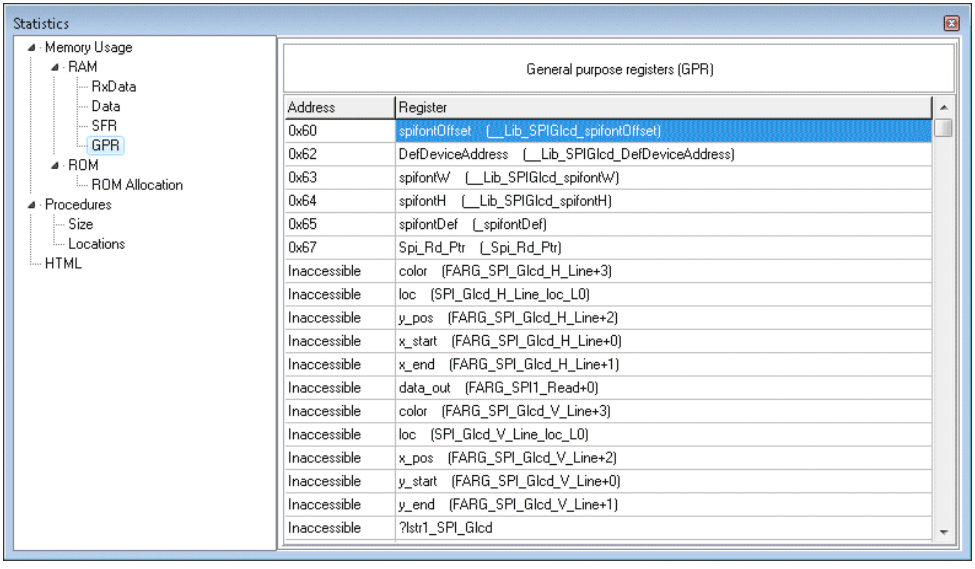

ROM Memory

ROM Memory Usage

Displays ROM memory usage in form of histogram.

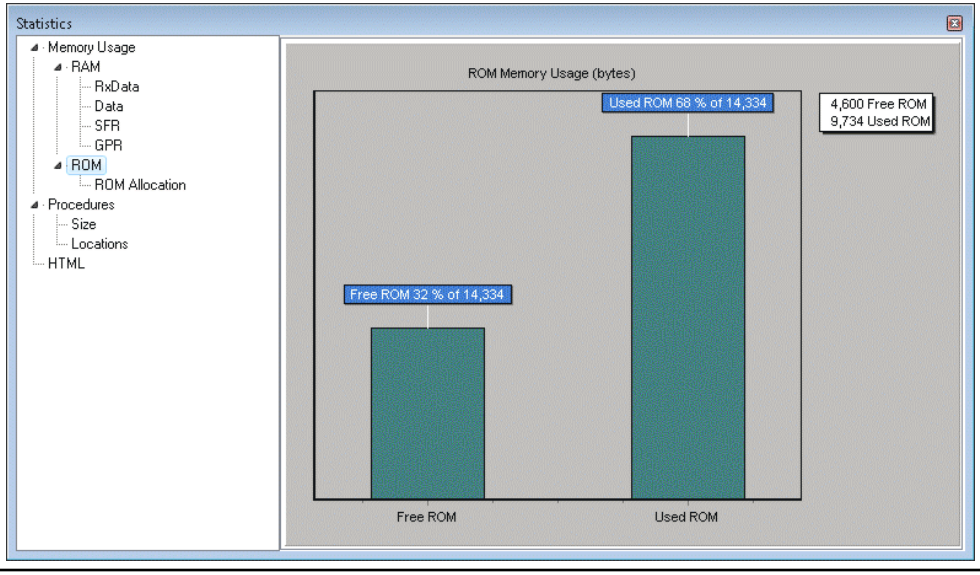

ROM Memory Allocation

Displays ROM memory allocation.

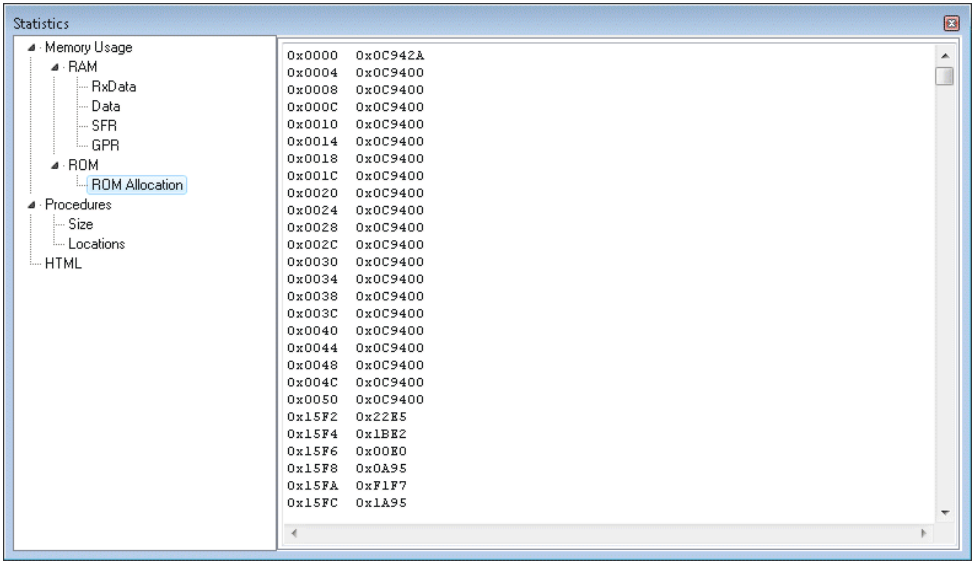

Procedures Windows

Provides overview procedures locations and sizes.

Procedures Size Window

Displays size of each procedure.

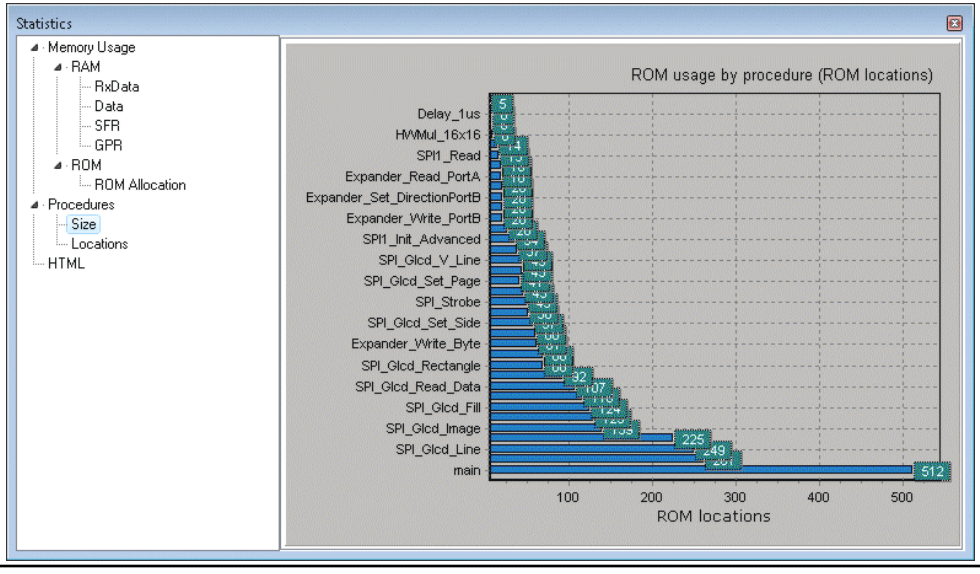

Procedures Locations Window

Displays how functions are distributed in microcontroller's memory.

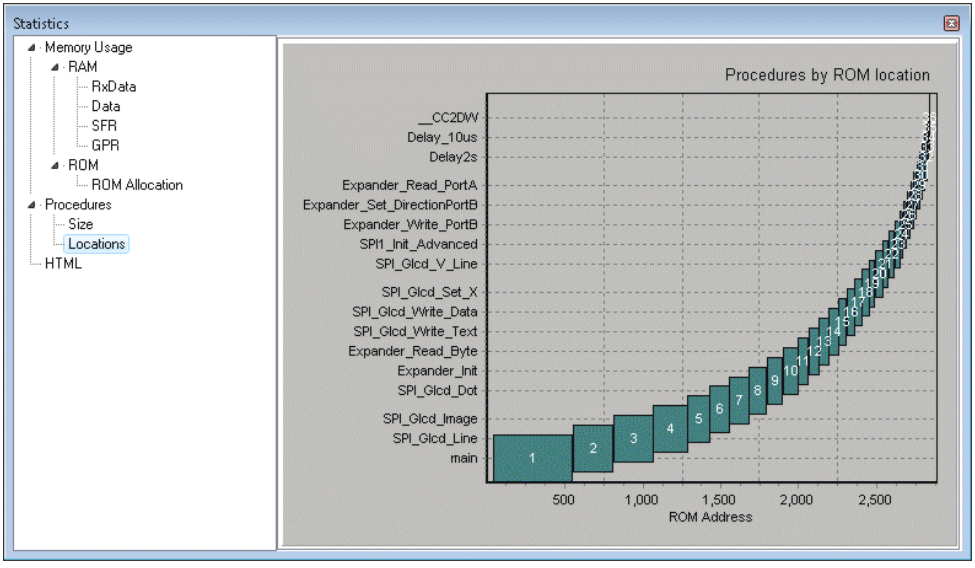

HTML Window

Display statistics in default web browser.

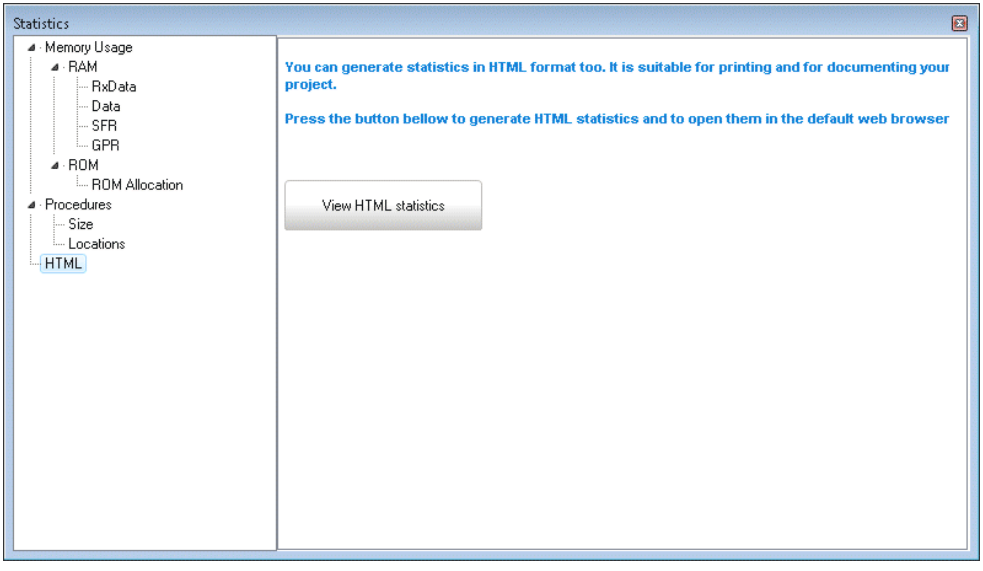

INTEGRATED TOOLS

USART Terminal

The mikroBasic PRO for AVR includes the USART communication terminal for RS232 communication. You can launch it from the drop-down menu **Tools › USART Terminal** or by clicking the USART Terminal Icon from Tools toolbar.

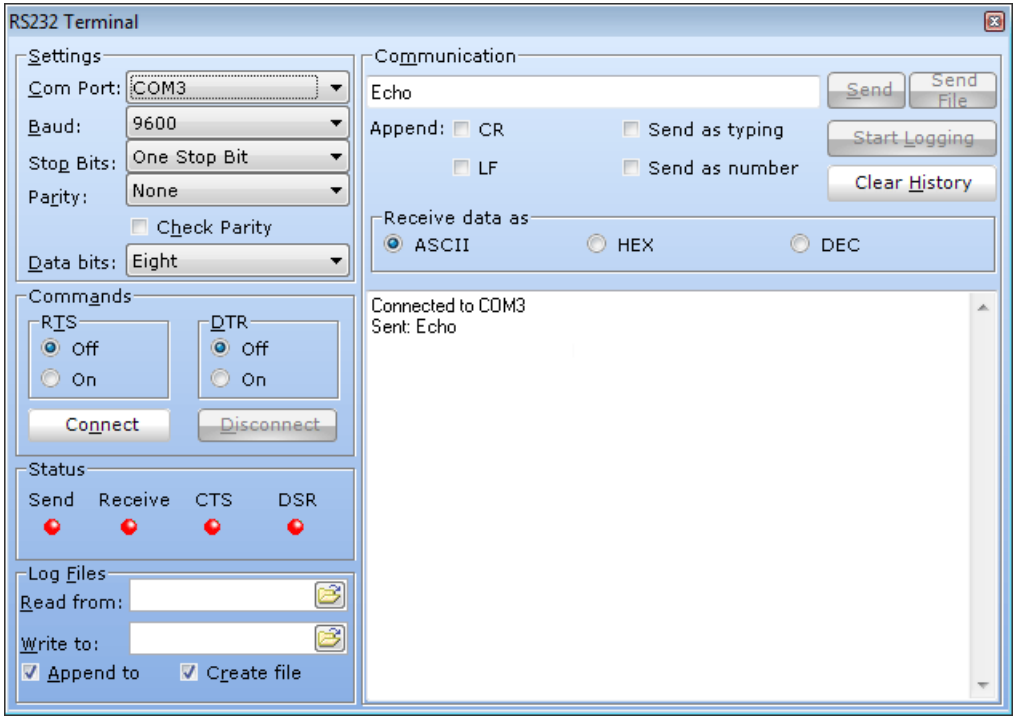

ASCII Chart

The ASCII Chart is a handy tool, particularly useful when working with Lcd display. You can launch it from the drop-down menu **Tools › ASCII** chart or by clicking the View ASCII Chart Icon from Tools toolbar.

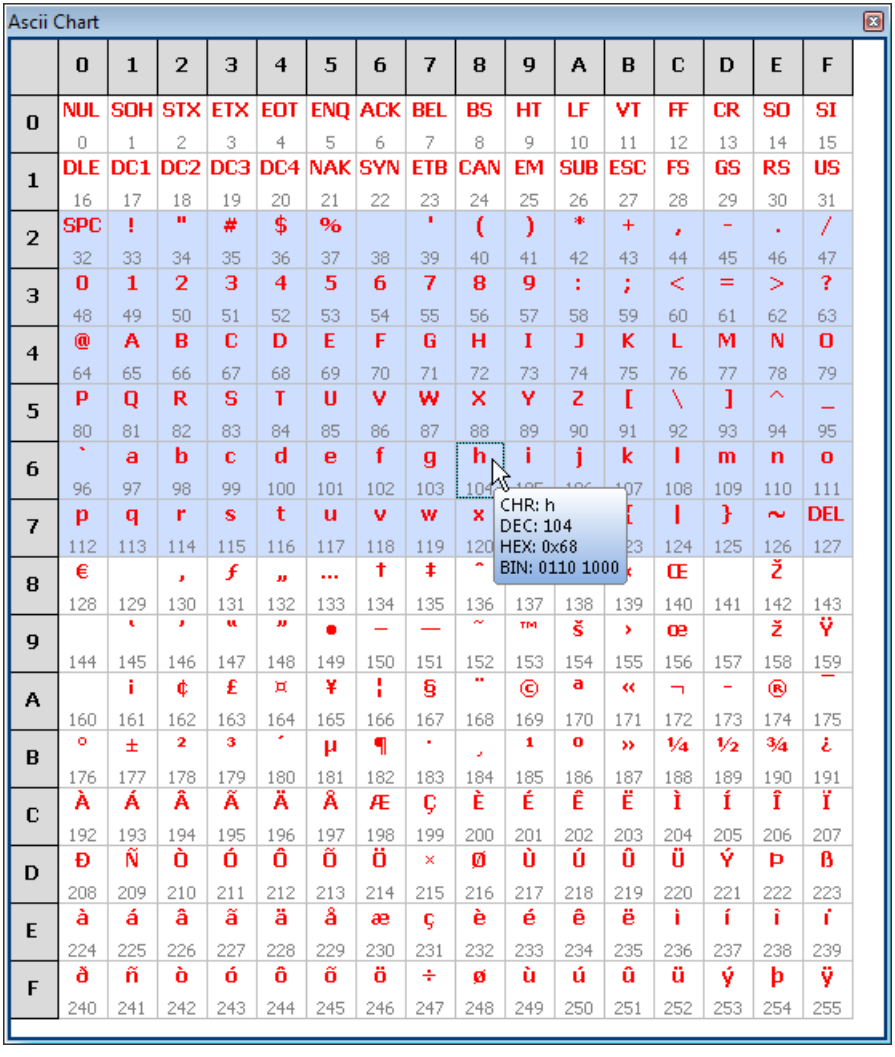

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	NUL 0	SOH 1	STX 2	ETX 3	EOT 4	ENQ 5	ACK 6	BEL 7	BS 8	HT 9	LF 10	VT 11	FF 12	CR 13	SO 14	SI 15
1	DLE 16	DC1 17	DC2 18	DC3 19	DC4 20	NAK 21	SYN 22	ETB 23	CAN 24	EM 25	SUB 26	ESC 27	FS 28	GS 29	RS 30	US 31
2	SPC 32	! 33	" 34	# 35	$ 36	% 37	38	' 39	(40	) 41	* 42	+ 43	, 44	- 45	. 46	/ 47
3	0 48	1 49	2 50	3 51	4 52	5 53	6 54	7 55	8 56	9 57	: 58	; 59	< 60	= 61	> 62	? 63
4	@ 64	A 65	B 66	C 67	D 68	E 69	F 70	G 71	H 72	I 73	J 74	K 75	L 76	M 77	N 78	O 79
5	P 80	Q 81	R 82	S 83	T 84	U 85	V 86	W 87	X 88	Y 89	Z 90	[91	\ 92	] 93	^ 94	_ 95
6	` 96	a 97	b 98	c 99	d 100	e 101	f 102	g 103	h 104	i	j	k	l 108	m 109	n 110	o 111
7	p 112	q 113	r 114	s 115	t 116	u 117	v 118	w 119	x 120				| 124	} 125	~ 126	DEL 127
8	€ 128	129	‚ 130	ƒ 131	„ 132	… 133	† 134	‡ 135	ˆ 136	137	138	139	Œ 140	141	Ž 142	143
9	144	‘ 145	’ 146	“ 147	” 148	• 149	– 150	— 151	˜ 152	™ 153	š 154	› 155	œ 156	157	ž 158	Ÿ 159
A	160	¡ 161	¢ 162	£ 163	¤ 164	¥ 165	¦ 166	§ 167	¨ 168	© 169	ª 170	« 171	¬ 172	- 173	® 174	¯ 175
B	° 176	± 177	² 178	³ 179	´ 180	µ 181	¶ 182	· 183	¸ 184	¹ 185	º 186	» 187	¼ 188	½ 189	¾ 190	¿ 191
C	À 192	Á 193	Â 194	Ã 195	Ä 196	Å 197	Æ 198	Ç 199	È 200	É 201	Ê 202	Ë 203	Ì 204	Í 205	Î 206	Ï 207
D	Ð 208	Ñ 209	Ò 210	Ó 211	Ô 212	Õ 213	Ö 214	× 215	Ø 216	Ù 217	Ú 218	Û 219	Ü 220	Ý 221	Þ 222	ß 223
E	à 224	á 225	â 226	ã 227	ä 228	å 229	æ 230	ç 231	è 232	é 233	ê 234	ë 235	ì 236	í 237	î 238	ï 239
F	ð 240	ñ 241	ò 242	ó 243	ô 244	õ 245	ö 246	÷ 247	ø 248	ù 249	ú 250	û 251	ü 252	ý 253	þ 254	ÿ 255

EEPROM Editor

The EEPROM Editor is used for manipulating MCU's EEPROM memory. You can launch it from the drop-down menu **Tools › EEPROM Editor.** When Use this EEPROM definition is checked compiler will generate Intel hex file `project_name.ihex` that contains data from EEPROM editor.

When you run mikroElektronika programmer software from mikroBasic PRO for AVR IDE - `project_name.hex` file will be loaded automatically while ihex file must be loaded manually.

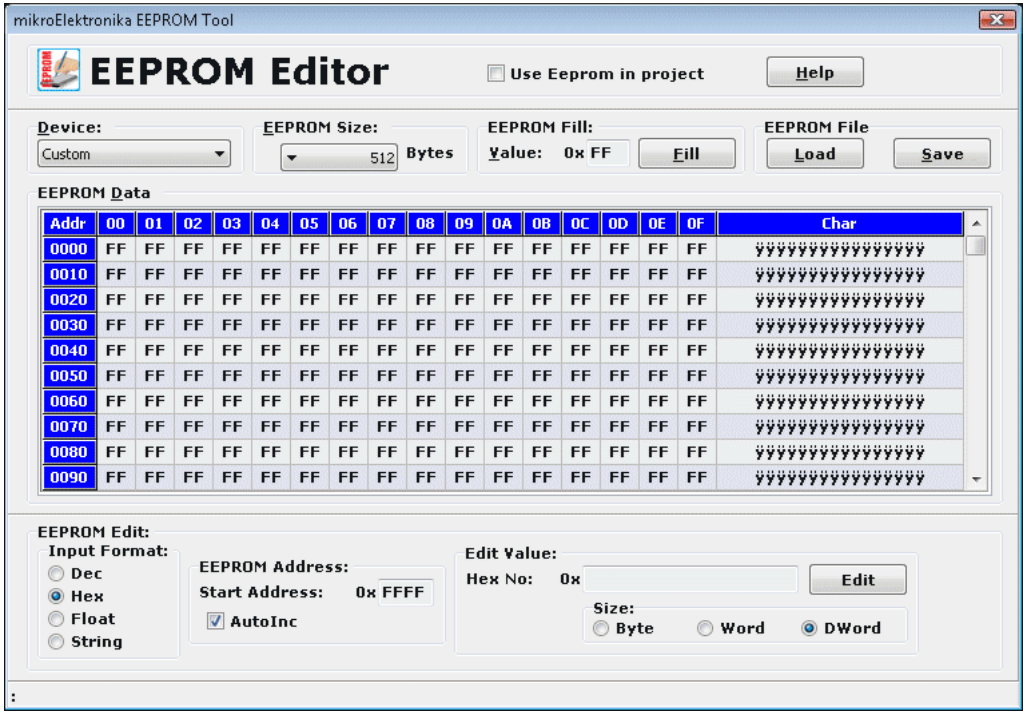
mikroElektronika EEPROM Tool
EEPROM Editor
Use Eeprom in project
Help
Device:
Custom
EEPROM Size:
512
Bytes
EEPROM Fill:
Value: 0x FF
Fill
EEPROM File
Load
Save
EEPROM Data
Addr 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F Char
0000 FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF
0010 FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF
0020 FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF
0030 FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF
0040 FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF
0050 FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF
0060 FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF
0070 FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF
0080 FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF
0090 FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF
EEPROM Edit:
Input Format:
Dec
Hex
Float
String
EEPROM Address:
Start Address: 0x FFFF
AutoInc
Edit Value:
Hex No: 0x
Edit
Size:
Byte
Word
DWord

7 Segment Display Decoder

The 7 Segment Display Decoder is a convenient visual panel which returns decimal/hex value for any viable combination you would like to display on 7seg. Click on the parts of 7 segment image to get the requested value in the edit boxes. You can launch it from the drop-down menu **Tools › 7 Segment Decoder** or by clicking the Seven Segment Icon from Tools toolbar.

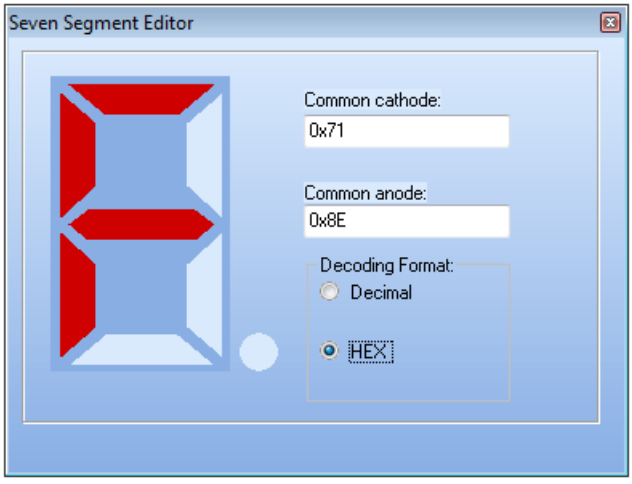

UDP Terminal

The mikroBasic PRO for AVR includes the UDP Terminal. You can launch it from the drop-down menu **Tools › UDP Terminal.**

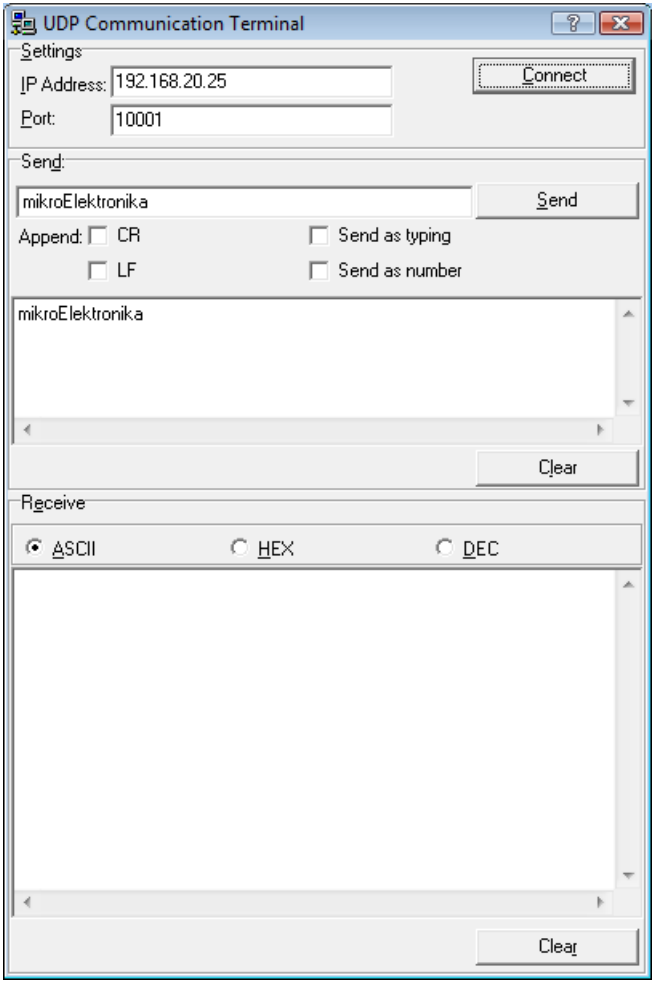

Graphic Lcd Bitmap Editor

The mikroBasic PRO for AVR includes the Graphic Lcd Bitmap Editor. Output is the mikroBasic PRO for AVR compatible code. You can launch it from the drop-down menu **Tools › Glcd Bitmap Editor.**

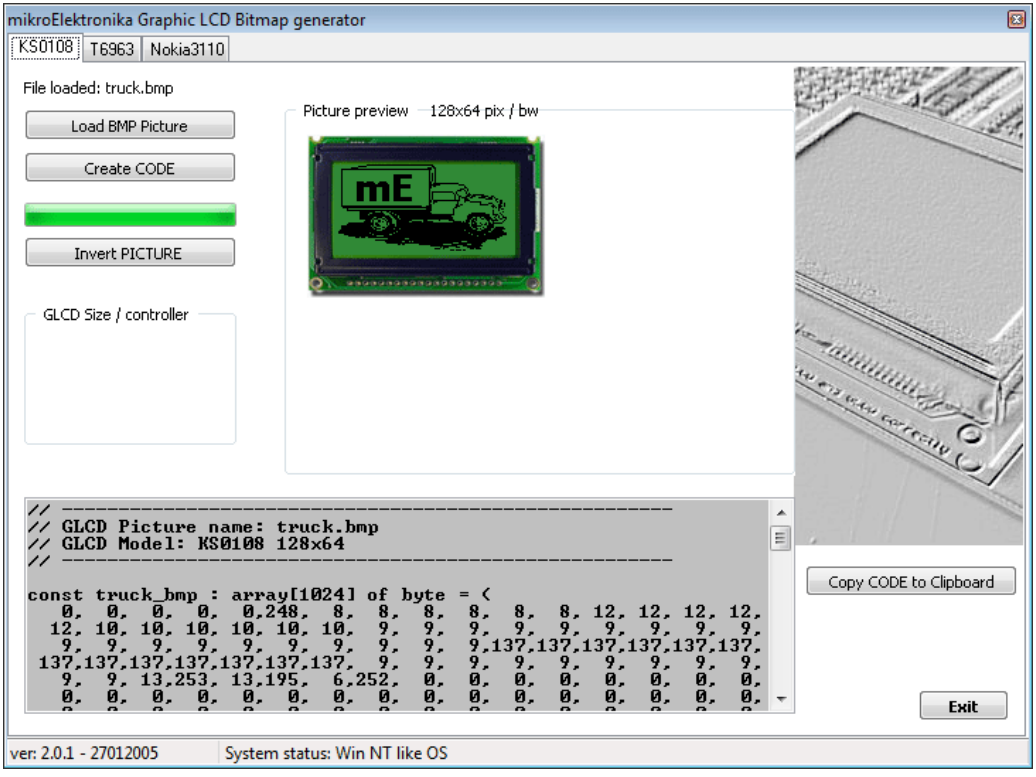
mikroElektronika Graphic LCD Bitmap generator
KS0108
T6963
Nokia3110
File loaded: truck.bmp
Load BMP Picture
Create CODE
Invert PICTURE
GLCD Size / controller
Picture preview
128x64 pix / bw
mE
// GLCD Picture name: truck.bmp
// GLCD Model: KS0108 128x64
const truck_bmp : array[1024] of byte = (
0, 0, 0, 0, 0,248, 8, 8, 8, 8, 8, 8, 12, 12, 12, 12,
12, 10, 10, 10, 10, 10, 10, 9, 9, 9, 9, 9, 9, 9, 9, 9,
9, 9, 9, 9, 9, 9, 9, 9, 9, 9,137,137,137,137,137,137,
137,137,137,137,137,137,137,137, 9, 9, 9, 9, 9, 9, 9, 9,
9, 9, 13,253, 13,195, 6,252, 0, 0, 0, 0, 0, 0, 0, 0,
0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
Copy CODE to Clipboard
Exit
ver: 2.0.1 - 27012005
System status: Win NT like OS

Lcd Custom Character

mikroBasic PRO for AVR includes the Lcd Custom Character. Output is mikroBasic PRO for AVR compatible code. You can launch it from the drop-down menu **Tools › Lcd Custom Character**.

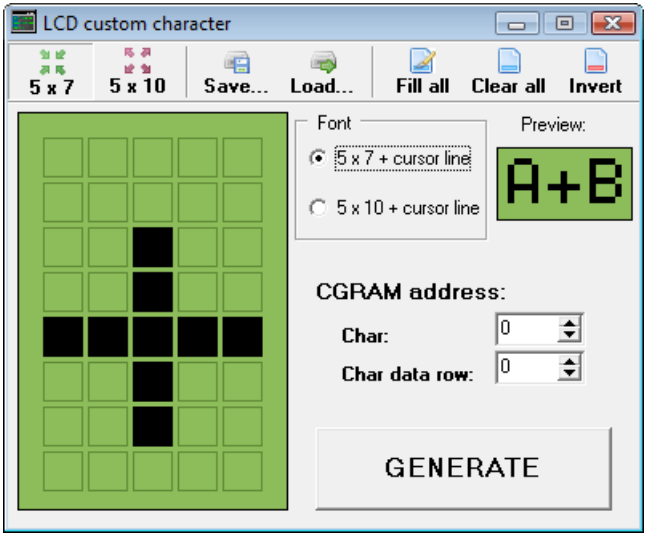

MACRO EDITOR

A macro is a series of keystrokes that have been 'recorded' in the order performed. A macro allows you to 'record' a series of keystrokes and then 'playback', or repeat, the recorded keystrokes.

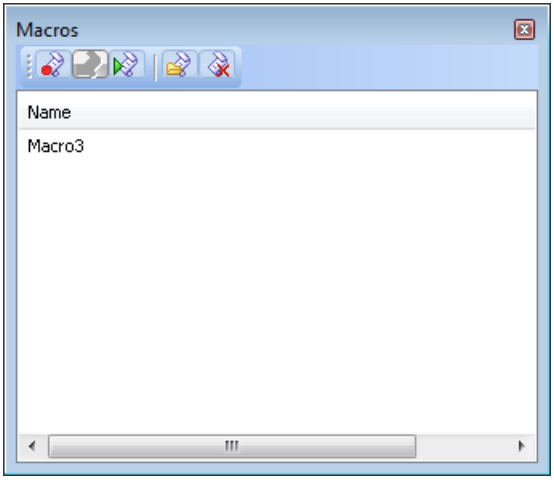

The Macro offers the following commands:

Icon	Description
	Starts 'recording' keystrokes for later playback.
	Stops capturing keystrokesthat was started when the Start Recordig command was selected.
	Allows a macro that has been recorded to be replayed.
	New macro.
	Delete macro.

Related topics: Advanced Code Editor, Code Templates

OPTIONS

Options menu consists of three tabs: Code Editor, Tools and Output settings

Code editor

The Code Editor is advanced text editor fashioned to satisfy needs of professionals.

Tools

The mikroBasic PRO for AVR includes the Tools tab, which enables the use of shortcuts to external programs, like Calculator or Notepad.
You can set up to 10 different shortcuts, by editing Tool0 - Tool9.

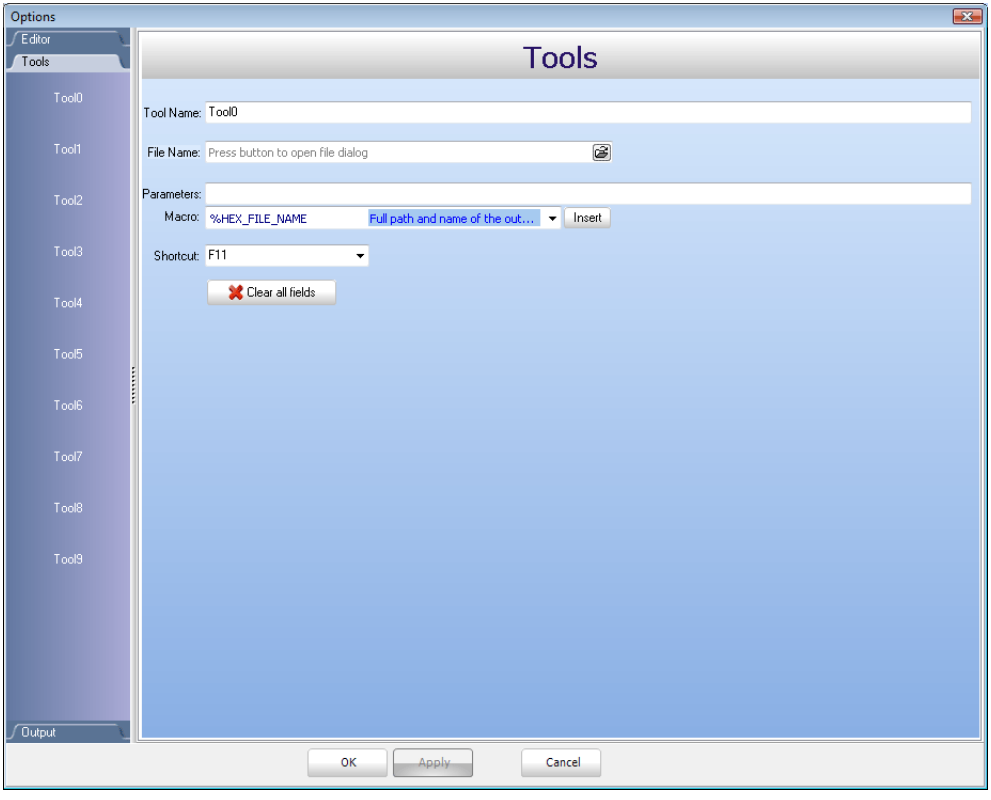

Output settings

By modifying Output Settings, user can configure the content of the output files. You can enable or disable, for example, generation of ASM and List file.

Also, user can choose optimization level, and compiler specific settings, which include case sensitivity, dynamic link for string literals setting (described in mikroBasic PRO for AVR specifics).

Build all files as library enables user to use compiled library (`*.mcl`) on any AVR MCU (when this box is checked), or for a selected AVR MCU (when this box is left unchecked).

For more information on creating new libraries, see Creating New Library.

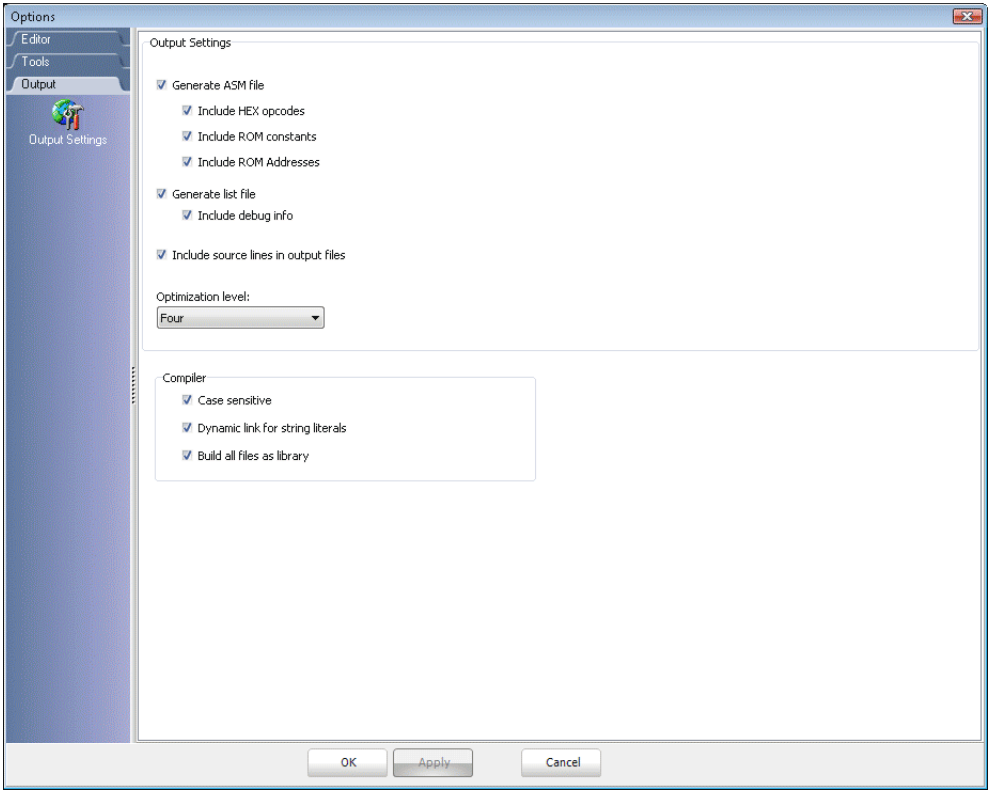

REGULAR EXPRESSIONS

Introduction

Regular Expressions are a widely-used method of specifying patterns of text to search for. Special metacharacters allow you to specify, for instance, that a particular string you are looking for, occurs at the beginning, or end of a line, or contains n recurrences of a certain character.

Simple matches

Any single character matches itself, unless it is a metacharacter with a special meaning described below. A series of characters matches that series of characters in the target string, so the pattern `"short"` would match `"short"` in the target string. You can cause characters that normally function as metacharacters or escape sequences to be interpreted by preceding them with a backslash `"\"`.
For instance, metacharacter `"^"` matches beginning of string, but `"\^"` matches character `"^"`, and `"\\"` matches `"\"`, etc.

Examples :

`unsigned` matches `string 'unsigned'`
`\^unsigned` matches `string '^unsigned'`

Escape sequences

Characters may be specified using a escape sequences: `"\n"` matches a newline, `"\t"` a tab, etc. More generally, `\xnn`, where nn is a string of hexadecimal digits, matches the character whose ASCII value is `nn`.
If you need wide (Unicode) character code, you can use `'\x{ nnnn} '`, where 'nnnn' - one or more hexadecimal digits.

- `\xnn` - char with hex code nn
- `\x{ nnnn)` - char with hex code `nnnn` (one byte for plain text and two bytes for Unicode)
- `\t` - tab (HT/TAB), same as `\x09`
- `\n` - newline (NL), same as `\x0a`
- `\r` - car.return (CR), same as \x0d
- `\f` - form feed (FF), same as `\x0c`
- `\a` - alarm (bell) (BEL), same as `\x07`
- `\e` - escape (ESC) , same as `\x1b`

Examples:

`unsigned\x20int` matches `'unsigned int'` (note space in the middle)
`\tunsigned` matches `'unsigned'` (predecessed by tab)

Character classes

You can specify a character class, by enclosing a list of characters in [], which will match any of the characters from the list. If the first character after the "[" is "^", the class matches any character not in the list.

Examples:

`count[ aeiou] r` finds strings `'countar', 'counter'`, etc. but not `'countbr', 'countcr'`, etc.
`count[ ^aeiou] r` finds strings `'countbr', 'countcr'`, etc. but not `'countar', 'counter'`, etc.

Within a list, the `"-"` character is used to specify a range, so that a-z represents all characters between `"a"` and `"z"`, inclusive.

If you want `"-"` itself to be a member of a class, put it at the start or end of the list, or precede it with a backslash.
If you want `'] '`, you may place it at the start of list or precede it with a backslash.

Examples:

`[ -az]` matches `'a', 'z'` and `'-'`
`[ az-]` matches `'a', 'z'` and `'-'`
`[ a\-z]` matches `'a', 'z'` and `'-'`
`[ a-z]` matches all twenty six small characters from `'a'` to `'z'`
`[ \n-\x0D]` matches any of `#10,#11,#12,#13.`
`[ \d-t]` matches any digit, `'-'` or `'t'`.
`[ ] -a]` matches any char from `'] '..'a'.`

Metacharacters

Metacharacters are special characters which are the essence of regular expressions. There are different types of metacharacters, described below.

Metacharacters - Line separators

`^` - start of line
`$` - end of line
`\A` - start of text
`\Z` - end of text
`.` - any character in line

Examples:

^PORTA - matches string ' PORTA ' only if it's at the beginning of line
PORTA$ - matches string ' PORTA ' only if it's at the end of line
^PORTA$ - matches string ' PORTA ' only if it's the only string in line
PORT.r - matches strings like 'PORTA', 'PORTB', 'PORT1' and so on

The "^" metacharacter by default is only guaranteed to match beginning of the input string/text, and the "$" metacharacter only at the end. Embedded line separators will not be matched by ^" or "$".
You may, however, wish to treat a string as a multi-line buffer, such that the "^" will match after any line separator within the string, and "$" will match before any line separator.
Regular expressions works with line separators as recommended at http://www.unicode.org/unicode/reports/tr18/

Metacharacters - Predefined classes

\w - an alphanumeric character (including "_")
\W - a nonalphanumeric character
\d - a numeric character
\D - a non-numeric character
\s - any space (same as [\t\n\r\f])
\S - a non space

You may use \w, \d and \s within custom character classes.

Example:

routi\de - matches strings like 'routi1e', 'routi6e' and so on, but not 'routine', 'routime' and so on.

Metacharacters - Word boundaries

A word boundary ("\b") is a spot between two characters that has an alphanumeric character ("\w") on one side, and a nonalphanumeric character ("\W") on the other side (in either order), counting the imaginary characters off the beginning and end of the string as matching a "\W".

\b - match a word boundary)
\B - match a non-(word boundary)

Metacharacters - Iterators

Any item of a regular expression may be followed by another type of metacharacters - iterators. Using this metacharacters,you can specify number of occurences of previous character, metacharacter or subexpression.

`*` - zero or more ("greedy"), similar to {0,}
`+` - one or more ("greedy"), similar to {1,}
`?` - zero or one ("greedy"), similar to {0,1}
`{n}` - exactly n times ("greedy")
`{n,}` - at least n times ("greedy")
`{n,m}` - at least n but not more than m times ("greedy")
`*?` - zero or more ("non-greedy"), similar to {0,}?
`+?` - one or more ("non-greedy"), similar to {1,}?
`??` - zero or one ("non-greedy"), similar to {0,1}?
`{n}?` - exactly n times ("non-greedy")
`{n,}?` - at least n but not more than m times ("non-greedy")
`{n,m}?` - at least n but not more than m times ("non-greedy")

So, digits in curly brackets of the form, `{n,m}`, specify the minimum number of times to match the item n and the maximum `m`. The form `{n}` is equivalent to `{n,n}` and matches exactly `n` times. The form `{n,}` matches `n` or more times. There is no limit to the size of `n` or `m`, but large numbers will chew up more memory and slow down execution.

If a curly bracket occurs in any other context, it is treated as a regular character.

Examples:

`count.*r` ß- matches strings like `'counter'`, `'countelkjdflkj9r'` and `'countr'`
`count.+r` - matches strings like `'counter'`, `'countelkjdflkj9r'` but not `'countr'`
`count.?r` - matches strings like `'counter'`, `'countar'` and `'countr'` but not `'countelkj9r'`
`counte{2}r` - matches string `'counteer'`
`counte{2,}r` - matches strings like `'counteer'`, `'counteeer'`, `'counteeer'` etc.
`counte{2,3}r` - matches strings like `'counteer'`, or `'counteeer'` but not `'counteeeer'`

A little explanation about "greediness". "Greedy" takes as many as possible, "non-greedy" takes as few as possible.
For example, `'b+'` and `'b*'` applied to string `'abbbbc'` return `'bbbb'`, `'b+?'` returns `'b'`, `'b*?'` returns empty string, `'b{2,3}?'` returns `'bb'`, `'b{2,3}'` returns `'bbb'`.

Metacharacters - Alternatives

You can specify a series of alternatives for a pattern using `"|"` to separate them, so that bit|bat|bot will match any of "bit", "bat", or "bot" in the target string as would "b(i|a|o)t)". The first alternative includes everything from the last pattern delimiter ("(", "[", or the beginning of the pattern) up to the first "|", and the last alternative contains everything from the last "|" to the next pattern delimiter. For this reason, it's common practice to include alternatives in parentheses, to minimize confusion about where they start and end.

Alternatives are tried from left to right, so the first alternative found for which the entire expression matches, is the one that is chosen. This means that alternatives are not necessarily greedy. For example: when matching rou|rout against "routine", only the "rou" part will match, as that is the first alternative tried, and it successfully matches the target string (this might not seem important, but it is important when you are capturing matched text using parentheses.) Also remember that "|" is interpreted as a literal within square brackets, so if you write `[bit|bat|bot]`, you're really only matching `[biao|]`.

Examples:

`rou(tine|te)` - matches strings `'routine'` or `'route'`.

Metacharacters - Subexpressions

The bracketing construct (`...`) may also be used for define regular subexpressions. Subexpressions are numbered based on the left to right order of their opening parenthesis. First subexpression has number `'1'`

Examples:

`(int){8,10}` matches strings which contain 8, 9 or 10 instances of the '`int`'
`routi([0-9]|a+)e` matches `'routi0e'`, `'routi1e'`, `'routine'`, `'routinne'`, `'routinnne'` etc.

Metacharacters - Backreferences

Metacharacters `\1` through `\9` are interpreted as backreferences. `\` matches previously matched subexpression `#`.

Examples:

`(.)\1+` matches '`aaaa`' and '`cc`'.
`(.+)\1+` matches '`abab`' and '`123123`'
`(['"]?)(\d+)\1` matches `"13"` (in double quotes), or `'4'` (in single quotes) or `77` (without quotes) etc

MIKROBASIC PRO FOR AVR COMMAND LINE OPTIONS

Usage: `mBAvr.exe [ -<opts> [ -<opts>]] [ <infile> [ -<opts>]] [ -<opts>]]`
Infile can be of *.mbas and `*.mcl` type.

The following parameters and some more (see manual) are valid:

`-P` : MCU for which compilation will be done.
`-FO` : Set oscillator [in MHz].
`-SP` : Add directory to the search path list.
`-IP` : Add directory to the #include search list.
`-N` : Output files generated to file path specified by filename.
`-B` : Save compiled binary files (`*.mcl`) to 'directory'.
`-O` : Miscellaneous output options.
`-DBG` : Generate debug info.
`-L` : Check and rebuild new libraries.
`-DL` : Build all files as libraries.
`-Y` : Dynamic link for string literals.
`-C` : Turn on case sensitivity.

Example:

```
mBAvr.exe -MSF -DBG -pATMEGA16 -C -O11111114 -fo8 -N"C:\Lcd\Lcd.mcpav" -SP"C:\Program Files\Mikroelektronika\mikroBasic PRO for AVR\Defs\"
-SP"C:\Program Files\Mikroelektronika\mikroBasic PRO for AVR\Uses\LTE64KW\" -SP"C:\Lcd\" "Lcd.mbas" "__Lib_Math.mcl" "__Lib_MathDouble.mcl"
"__Lib_System.mcl" "__Lib_Delays.mcl" "__Lib_LcdConsts.mcl" "__Lib_Lcd.mcl"
```

Parameters used in the example:

`-MSF` : Short Message Format; used for internal purposes by IDE.
`-DBG` : Generate debug info.
`-pATMEGA16` : MCU ATMEGA16 selected.
`-C` : Turn on case sensitivity.
`-O11111114` : Miscellaneous output options.
`-fo8` : Set oscillator frequency [in MHz].
`-N"C:\Lcd\Lcd.mcpav" -SP"C:\Program Files\Mikroelektronika\mikroBasic PRO for AVR\defs\" :` Output files generated to file path specified by filename.
`-SP"C:\Program Files\Mikroelektronika\mikroBasic PRO for AVR\defs\"` : Add directory to the search path list.
`-SP"C:\Program Files\Mikroelektronika\mikroBasic PRO for AVR\uses\"` : Add directory to the search path list.
`-SP"C:\Lcd\"` : Add directory to the search path list.
`"Lcd.mbas" "__Lib_Math.mcl" "__Lib_MathDouble.mcl" "__Lib_System.mcl" "__Lib_Delays.mcl" "__Lib_LcdConsts.mcl" "__Lib_Lcd.mcl" :` Specify input files.

PROJECTS

The mikroBasic PRO for AVR organizes applications into projects, consisting of a single project file (extension `.mcpav`) and one or more source files (extension). mikroBasic PRO for AVR IDE allows you to manage multiple projects (see Project Manager). Source files can be compiled only if they are part of a project.

The project file contains the following information:

- project name and optional description,
- target device,
- device flags (config word),
- device clock,
- list of the project source files with paths,
- image files,
- other files.

Note that the project does not include files in the same way as preprocessor does, see Add/Remove Files from Project.

NEW PROJECT

The easiest way to create a project is by means of the New Project Wizard, drop-down menu **Project › New Project** or by clicking the New Project Icon from Project Toolbar.

New Project Wizard Steps

Start creating your New project, by clicking Next button:

New Project Wizard
Welcome to the New Project Wizard
This wizard helps you:
• Create a new project
• Select the device for your project
• Setup device clock and choose device flags
• Select desired memory model
• Add project files
Click Next to continue
Back
Next
Cancel

Step One - Select the device from the device drop-down list.

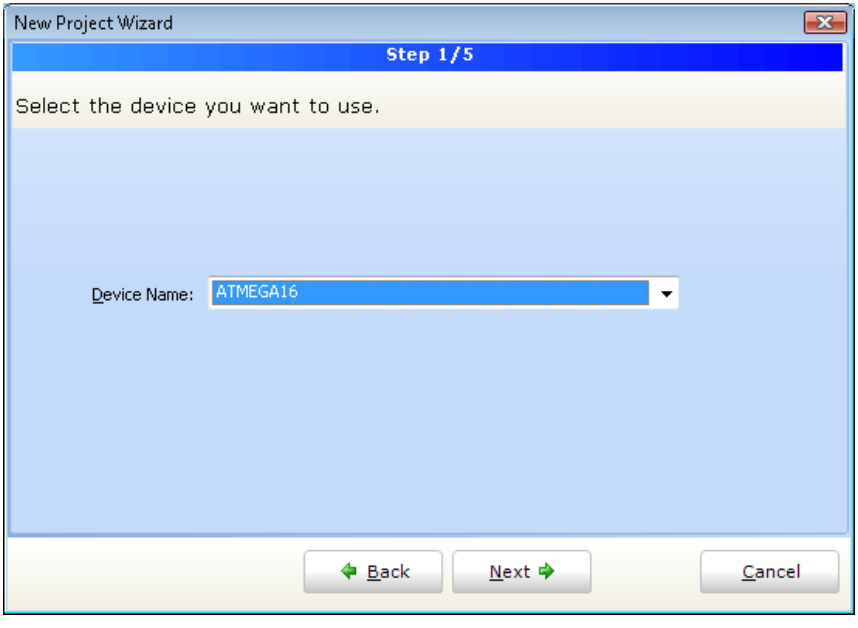

Step Two - Enter the oscillator frequency value.

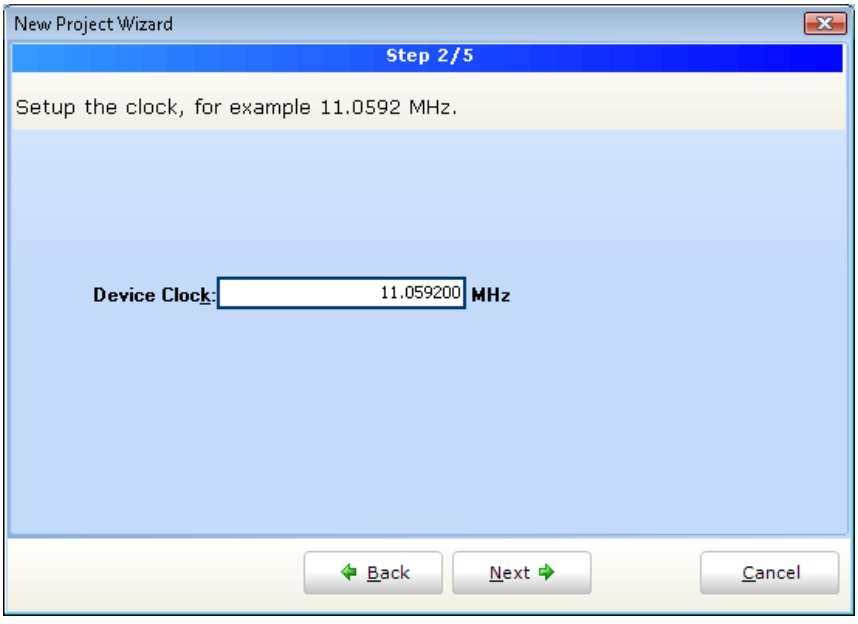

Step Three - Specify the location where your project will be saved.

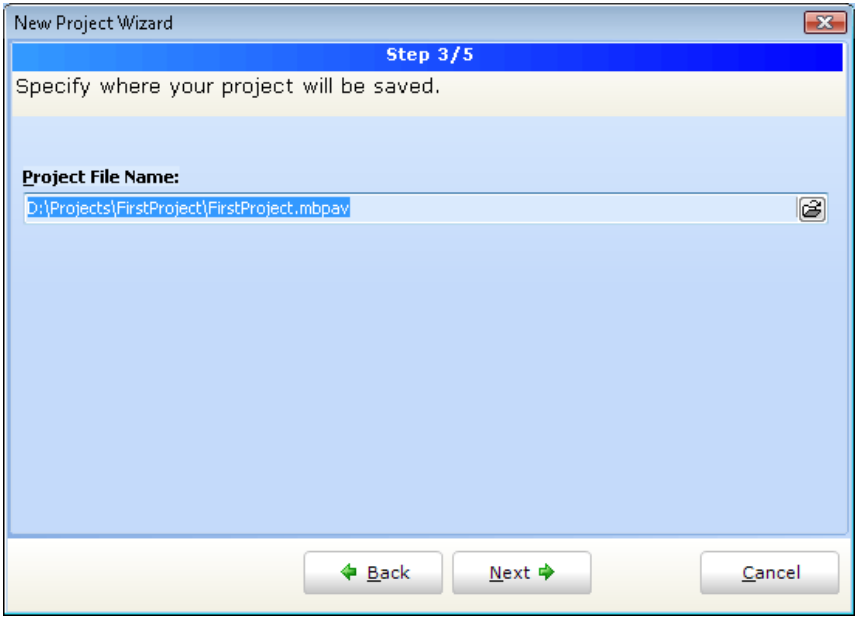

Step Four - Add project file to the project if they are avaiable at this point. You can always add project files later using Project Manager.

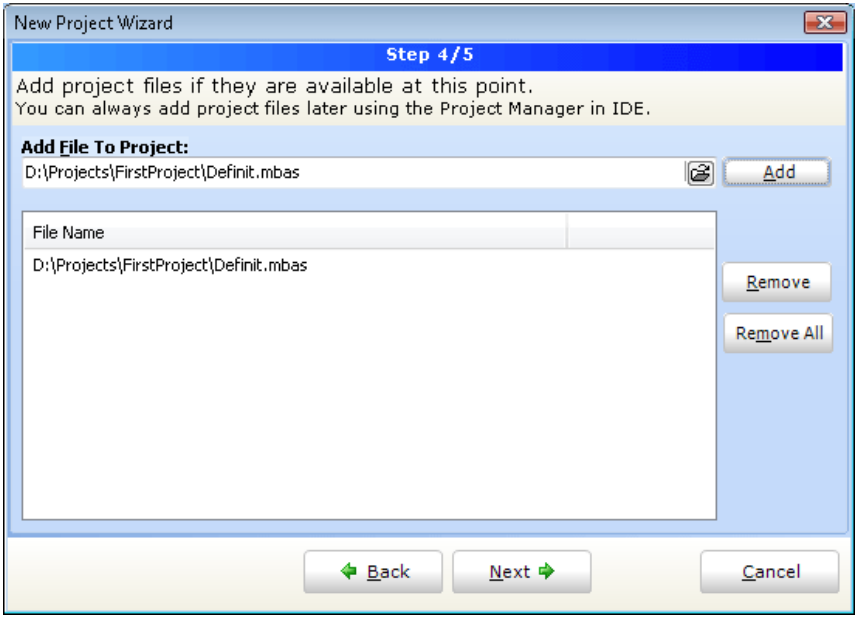

Step Five - Click Finish button to create your New Project:

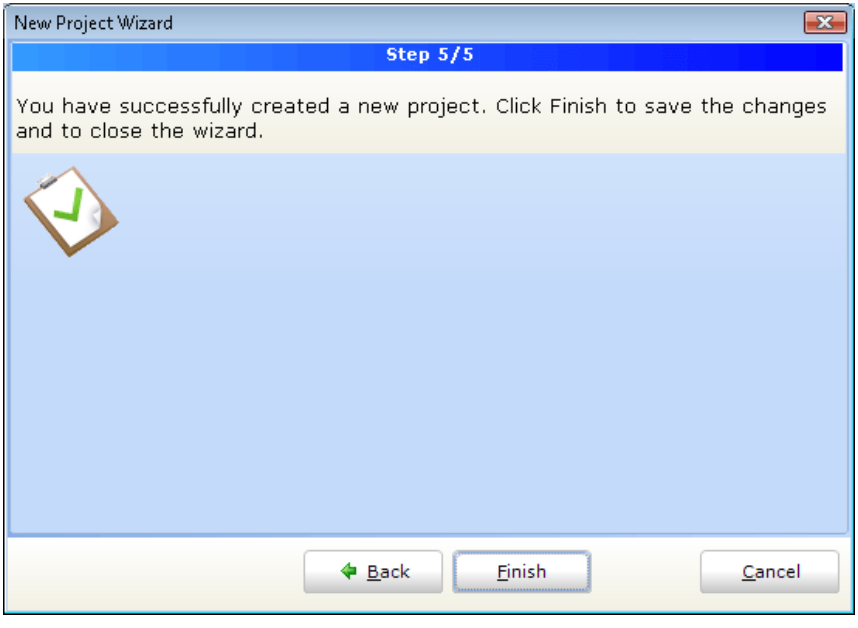
New Project Wizard
Step 5/5
You have successfully created a new project. Click Finish to save the changes and to close the wizard.
Back
Finish
Cancel

Related topics: Project Manager, Project Settings

CUSTOMIZING PROJECTS

Edit Project

You can change basic project settings in the Project Settings window. You can change chip and oscillator frequency. Any change in the Project Setting Window affects currently active project only, so in case more than one project is open, you have to ensure that exactly the desired project is set as active one in the Project Manager.

Managing Project Group

mikroBasic PRO for AVR IDE provides covenient option which enables several projects to be open simultaneously. If you have several projects being connected in some way, you can create a project group.
The project group may be saved by clicking the Save Project Group Icon from the Project Manager window. The project group may be reopend by clicking the Open Project Group Icon . All relevant data about the project group is stored in the project group file (extension `.mpg`)

ADD/REMOVE FILES FROM PROJECT

The project can contain the following file types:

- `.mbas` source files
- `.mcl` binary files
- `.pld` project level defines files
- `image` files
- `.hex`, .asm and .lst files, see output files. These files can not be added or removed from project.
- other files

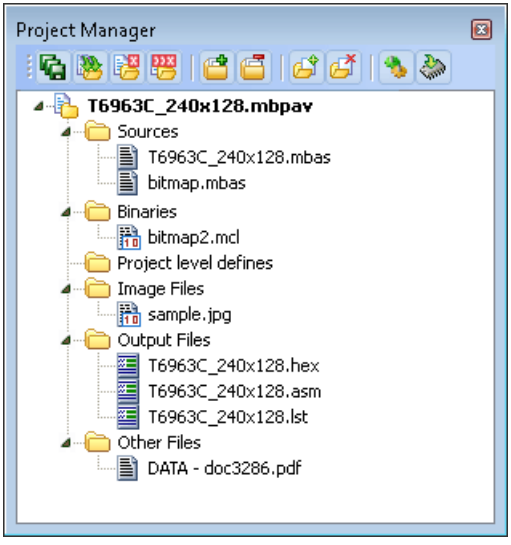

The list of relevant source files is stored in the project file (extension `.mbpav`).

To add source file to the project, click the Add File to Project Icon . Each added source file must be self-contained, i.e. it must have all necessary definitions after preprocessing.

To remove file(s) from the project, click the Remove File from Project Icon .

Note: For inclusion of the module files, use the `include` clause. See File Inclusion for more information.

Project Level Defines

Project Level Defines (`.pld`) files can also be added to project. Project level define files enable you to have defines that are visible in all source files in the project. One project may contain several `pld` files. A file must contain one definition per line, for example:

```
ANALOG
DEBUG
TEST
```

There are some predefined project level defines. See predefined project level defines

Related topics: Project Manager, Project Settings

SOURCE FILES

Source files containing Basic code should have the extension .mbas. The list of source files relevant to the application is stored in project file with extension `.mbpav`, along with other project information. You can compile source files only if they are part of the project.

Managing Source Files

Creating new source file

To create a new source file, do the following:

1. Select **File › New Unit** from the drop-down menu, or press Ctrl+N, or click the New File Icon from the File Toolbar.
2. A new tab will be opened. This is a new source file. Select **File › Save** from the drop-down menu, or press Ctrl+S, or click the Save File Icon from the File Toolbar and name it as you want.

If you use the New Project Wizard, an empty source file, named after the project with extension `.mbas`, will be created automatically. The mikroBasic PRO for AVR does not require you to have a source file named the same as the project, it's just a matter of convenience.

Opening an existing file

1. Select **File › Open** from the drop-down menu, or press Ctrl+O, or click the Open File Icon from the File Toolbar. In Open Dialog browse to the location of the file that you want to open, select it and click the Open button.
2. The selected file is displayed in its own tab. If the selected file is already open, its current Editor tab will become active.

Printing an open file

1. Make sure that the window containing the file that you want to print is the active window.
2. Select **File › Print** from the drop-down menu, or press Ctrl+P.
3. In the Print Preview Window, set a desired layout of the document and click the OK button. The file will be printed on the selected printer.

Saving file

1. Make sure that the window containing the file that you want to save is the active window.
2. Select **File › Save** from the drop-down menu, or press Ctrl+S, or click the Save File Icon from the File Toolbar.

Saving file under a different name

1. Make sure that the window containing the file that you want to save is the active window.
2. Select **File › Save As** from the drop-down menu. The New File Name dialog will be displayed.
3. In the dialog, browse to the folder where you want to save the file.
4. In the File Name field, modify the name of the file you want to save.
5. Click the Save button.

Closing file

1. Make sure that the tab containing the file that you want to close is the active tab.
2. Select **File › Close** from the drop-down menu, or right click the tab of the file that you want to close and select **Close** option from the context menu.
3. If the file has been changed since it was last saved, you will be prompted to save your changes.

Related topics:File Menu, File Toolbar, Project Manager, Project Settings,

CLEAN PROJECT FOLDER

Clean Project Folder

This menu gives you option to choose which files from your current project you want to delete.
Files marked in bold can be easily recreated by building a project. Other files should be marked for deletion only with a great care, because IDE cannot recover them.

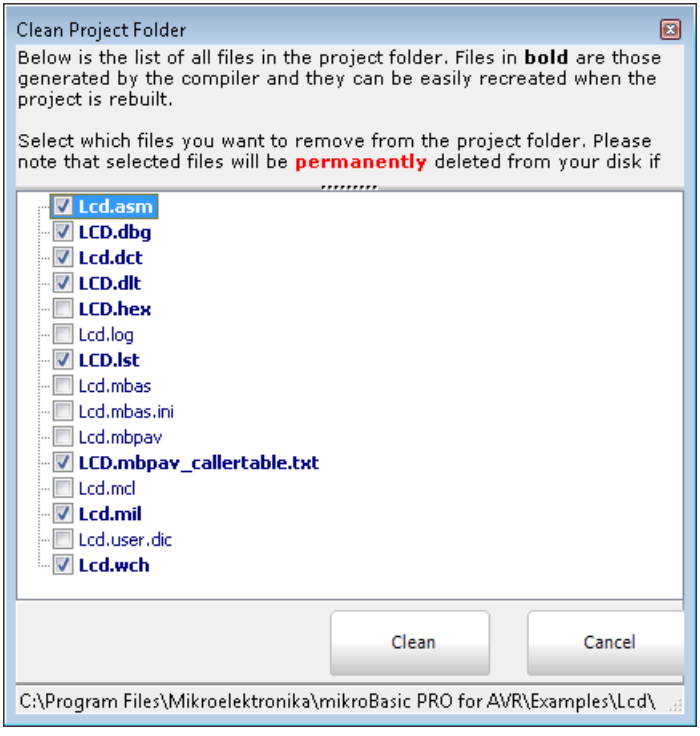

COMPILATION

When you have created the project and written the source code, it's time to compile it. Select **Project › Build** from the drop-down menu, or click the Build Icon from the Project Toolbar. If more more than one project is open you can compile all open projects by selecting **Project › Build All** from the drop-down menu, or click the Build All Icon from the Project Toolbar.

Progress bar will appear to inform you about the status of compiling. If there are some errors, you will be notified in the Error Window. If no errors are encountered, the mikroBasic PRO for AVR will generate output files.

Output Files

Upon successful compilation, the mikroBasic PRO for AVR will generate output files in the project folder (folder which contains the project file `.mbpav`). Output files are summarized in the table below:

Format	Description	File Type
Intel HEX	Intel style hex records. Use this file to program AVR MCU.	`.hex`
Binary	mikro Compiled Library. Binary distribution of application that can be included in other projects.	`.mcl`
List File	Overview of AVR memory allotment: instruction addresses, registers, routines and labels.	`.lst`
Assembler File	Human readable assembly with symbolic names, extracted from the List File.	`.asm`

Assembly View

After compiling the program in the mikroBasic PRO for AVR, you can click the View Assembly icon or select **Project › View Assembly** from the drop-down menu to review the generated assembly code (`.asm` file) in a new tab window. Assembly is human-readable with symbolic names.

Related topics:Project Menu, Project Toolbar, Error Window, Project Manager, Project Settings

ERROR MESSAGES

Compiler Error Messages:

- "%s"is not valid identifier.
- Unknown type "%s".
- Identifier "%s" was not declared.
- Syntax error: Expected "%s" but "%s" found.
- Argument is out of range "%s".
- Syntax error in additive expression.
- File "%s" not found.
- Invalid command "%s".
- Not enough parameters.
- Too many parameters.
- Too many characters.
- Actual and formal parameters must be identical.
- Invalid ASM instruction: "%s".
- Identifier "%s" has been already declared in "%s".
- Syntax error in multiplicative expression.
- Definition file for "%s" is corrupted.
- ORG directive is currently supported for interrupts only.
- Not enough ROM.
- Not enough RAM.
- External procedure "%s" used in "%s" was not found.
- Internal error: "%s".
- Unit cannot recursively use itself.
- "%s" cannot be used out of loop.
- Supplied and formal parameters do not match ("%s" to "%s").
- Constant cannot be assigned to.
- Constant array must be declared as global.
- Incompatible types ("%s" to "%s").
- Too many characters ("%s").
- Soft_Uart cannot be initialized with selected baud rate/device clock.
- Main label cannot be used in modules.
- Break/Continue cannot be used out of loop.
- Preprocessor Error: "%s".
- Expression is too complicated.
- Duplicated label "%s".
- Complex type cannot be declared here.
- Record is empty.
- Unknown type "%s".
- File not found "%s".
- Constant argument cannot be passed by reference.
- Pointer argument cannot be passed by reference.

- Operator "%s" not applicable to these operands "%s".
- Exit cannot be called from the main block.
- Complex type parameter must be passed by reference.
- Error occured while compiling "%s".
- Recursive types are not allowed.
- Adding strings is not allowed, use "strcat" procedure instead.
- Cannot declare pointer to array, use pointer to structure which has array field.
- Return value of the function "%s" is not defined.
- Assignment to for loop variable is not allowed.
- "%s" is allowed only in the main program.
- Start address of "%s" has already been defined.
- Simple constant cannot have fixed address.
- Invalid date/time format.
- Invalid operator "%s".
- File "%s" is not accessible.
- Forward routine "%s" is missing implementation.
- ";" is not allowed before "else".
- Not enough elements: expected "%s", but "%s" elements found.
- Too many elements: expected "%s" elements.
- "external" is allowed for global declarations only.
- Destination size ("%s") does not match source size ("%s").
- Routine prototype is different from previous declaration.
- Division by zero.
- Uart module cannot be initialized with selected baud rate/device clock.
- % cannot be of "%s" type.

Warning Messages:

- Implicit typecast of integral value to pointer.
- Library "%s" was not found in search path.
- Interrupt context saving has been turned off.
- Variable "%s" is not initialized.
- Return value of the function "%s" is not defined.
- Identifier "%s" overrides declaration in unit "%s".
- Generated baud rate is "%s" bps (error = "%s" percent).
- Result size may exceed destination array size.
- Infinite loop.
- Implicit typecast performed from "%s" to "%s".
- Source size ("%s") does not match destination size ("%s").
- Array padded with zeros ("%s") in order to match declared size ("%s").
- Suspicious pointer conversion.

Hint Messages:

- Constant "%s" has been declared, but not used.
- Variable "%s" has been declared, but not used.
- Unit "%s" has been recompiled.
- Variable "%s" has been eliminated by optimizer.
- Compiling unit "%s".

SOFTWARE SIMULATOR OVERVIEW

The Source-level Software Simulator is an integral component of the mikroBasic PRO for AVR environment. It is designed to simulate operations of the AVR MCUs and assist the users in debugging Basic code written for these devices.

After you have successfully compiled your project, you can run the Software Simulator by selecting **Run › Start Debugger** from the drop-down menu, or by clicking the Start Debugger Icon from the Debugger Toolbar. Starting the Software Simulator makes more options available: Step Into, Step Over, Step Out, Run to Cursor, etc. Line that is to be executed is color highlighted (blue by default).

Note: The Software Simulator simulates the program flow and execution of instruction lines, but it cannot fully emulate AVR device behavior, i.e. it doesn't update timers, interrupt flags, etc.

Watch Window

The Software Simulator Watch Window is the main Software Simulator window which allows you to monitor program items while simulating your program. To show the Watch Window, select **View › Debug Windows › Watch** from the drop-down menu.

The Watch Window displays variables and registers of the MCU, along with their addresses and values.

There are two ways of adding variable/register to the watch list:

- by its real name (variable's name in "Basic" code). Just select desired variable/register from ***Select variable from list*** drop-down menu and click the Add Button 

.
- by its name ID (assembly variable name). Simply type name ID of the variable/register you want to display into ***Search the variable by assemby name*** box and click the Add Button 

.

Variables can also be removed from the Watch window, just select the variable that you want to remove and then click the Remove Button

.

Add All Button 

adds all variables.

Remove All Button  removes all variables.

You can also expand/collapse complex variables, i.e. struct type variables, strings...

Values are updated as you go through the simulation. Recently changed items are colored red.

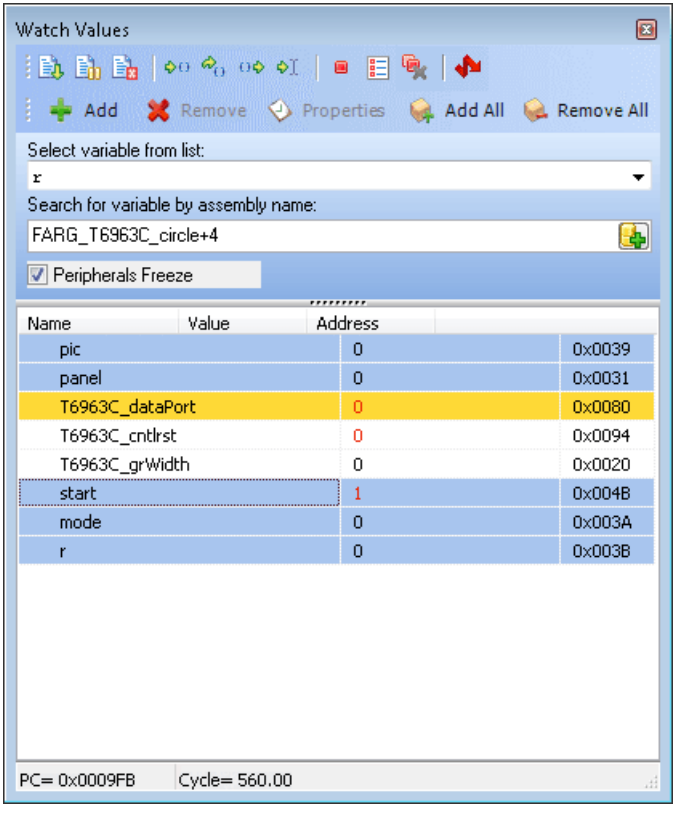

Double clicking a variable or clicking the Properties Button  opens the Edit Value window in which you can assign a new value to the selected variable/register. Also, you can choose the format of variable/register representation between decimal, hexadecimal, binary, float or character. All representations except float are unsigned by default. For signed representation click the check box next to the ***Signed*** label.

An item's value can be also changed by double clicking item's value field and typing the new value directly.

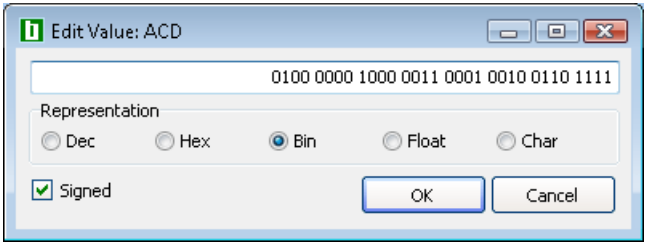

Stopwatch Window

The Software Simulator Stopwatch Window is available from the drop-down menu, **View › Debug Windows › Stopwatch.**

The Stopwatch Window displays a current count of cycles/time since the last Software Simulator action. Stopwatch measures the execution time (number of cycles) from the moment Software Simulator has started and can be reset at any time. Delta represents the number of cycles between the lines where Software Simulator action has started and ended.

Note: The user can change the clock in the Stopwatch Window, which will recalculate values for the latest specified frequency. Changing the clock in the Stopwatch Window does not affect actual project settings – it only provides a simulation.

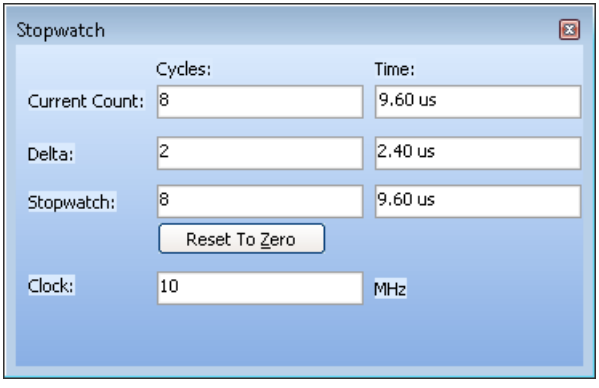

RAM Window

The Software Simulator RAM Window is available from the drop-down menu, **View › Debug Windows › RAM.**

The RAM Window displays a map of MCU's RAM, with recently changed items colored red. You can change value of any field by double-clicking it.

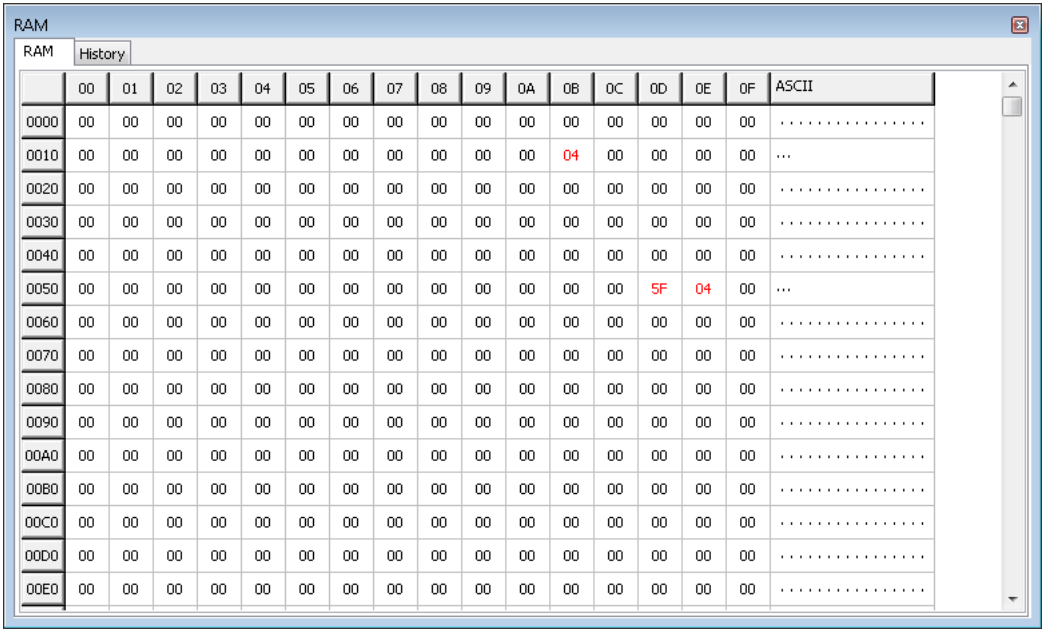

SOFTWARE SIMULATOR OPTIONS

Name	Description	Function Key	Toolbar Icon
Start Debugger	Start Software Simulator.	[F9]	
Run/Pause Debugger	Run or pause Software Simulator.	[F6]	
Stop Debugger	Stop Software Simulator.	[Ctrl+F2]	
Toggle Breakpoints	Toggle breakpoint at the current cursor position. To view all breakpoints, select Run > View Breakpoints from the drop–down menu. Double clicking an item in the Breakpoints Window List locates the breakpoint.	[F5]	
Run to cursor	Execute all instructions between the current instruction and cursor position.	[F4]	
Step Into	Execute the current Basic (single or multi–cycle) instruction, then halt. If the instruction is a routine call, enter the routine and halt at the first instruction following the call.	[F7]	
Step Over	Execute the current Basic (single or multi–cycle) instruction, then halt.	[F8]	
Step Out	Execute all remaining instructions in the current routine, return and then halt.	[Ctrl+F8]	

Related topics: Run Menu, Debug Toolbar

CREATING NEW LIBRARY

mikroBasic PRO for AVR allows you to create your own libraries. In order to create a library in mikroBasic PRO for AVR follow the steps bellow:

1. Create a new Basic source file, see Managing Source Files
2. Save the file in one of the subfolders of the compiler's Uses folder (LTE64kW or GT64kW, see note on the end of the page):
   `DriveName:\Program Files\Mikroelektronika\mikroBasic PRO for AVR\Uses\LTE64kW\__Lib_Example.mbas`
3. Write a code for your library and save it.
4. Add `__Lib_Example` file in some project, see Project Manager. Recompile the project.
   If you wish to use this library for all MCUs, then you should go to **Tools › Options › Output settings**, and check **Build all files as library** box.
   This will build libraries in a common form which will work with all MCUs. If this box is not checked, then library will be build for selected MCU.
   Bear in mind that compiler will report an error if a library built for specific MCU is used for another one.
5. Compiled file `__Lib_Example.mcl` should appear in `...\mikroBasic PRO for AVR\Uses\LTE64kW\` folder.
6. Open the definition file for the MCU that you want to use. This file is placed in the compiler's Defs folder:
   `DriveName:\Program Files\Mikroelektronika\mikroBasic PRO for AVR\Defs\` and it is named `MCU_NAME.mlk`, for example `ATMEGA16.mlk`
7. Add the the following segment of code to <`LIBRARIES`> node of the definition file (definition file is in XML format):
```
<LIB>
  <ALIAS>Example_Library</ALIAS>
  <FILE>__Lib_Example</FILE>
  <TYPE>REGULAR</TYPE>
</LIB>
```
8. Add Library to mlk file for each MCU that you want to use with your library.
9. Click Refresh button in Library Manager
10. `Example_Library` should appear in the Library manager window.

Multiple Library Versions

Library Alias represents unique name that is linked to corresponding Library .mcl file. For example UART library for ATMEGA16 is different from UART library for ATMEGA128 MCU. Therefore, two different UART Library versions were made, see mlk files for these two MCUs. Note that these two libraries have the same Library Alias (UART) in both mlk files. This approach enables you to have identical representation of UART library for both MCUs in Library Manager.

Note: In the Uses folder, there should be two subfolders, LTE64kW and GT64kW, depending on the Flash memory size of the desired MCU. See AVR Specifics for a detailed information regarding this subject.

Related topics: Library Manager, Project Manager, Managing Source Files

CHAPTER 3

mikroBasic PRO for AVR Specifics

The following topics cover the specifics of mikroBasic PRO for AVR compiler:

- Basic Standard Issues
- Predefined Globals and Constants
- Accessing Individual Bits
- Interrupts
- AVR Pointers
- Linker Directives
- Built-in Routines
- Code Optimization

BASIC STANDARD ISSUES

Divergence from the Basic Standard

Function recursion is not supported because of no easily-usable stack and limited memory AVR Specific

Basic Language Exstensions

mikroBasic PRO for AVR has additional set of keywords that do not belong to the standard Basic language keywords:

- code
- data
- io
- rx
- register
- at
- sbit
- bit
- sfr

Related topics: Keywords, AVR Specific

PREDEFINED GLOBALS AND CONSTANTS

In order to facilitate AVR programming, mikroBasic PRO for AVR implements a number of predefined globals and constants.

SFRs and related constants

All AVR SFRs are implicitly declared as global variables of `volatile word` type. These identifiers have an external linkage, and are visible in the entire project. When creating a project, the mikroBasic PRO for AVR will include an appropriate (*.mbas) file from defs folder, containing declarations of available SFRs and constants (such as PORTB, ADPCFG, etc). All identifiers are in upper case, identical to nomenclature in the Microchip datasheets.

For a complete set of predefined globals and constants, look for “Defs” in the mikroBasic PRO for AVR installation folder, or probe the Code Assistant for specific letters (Ctrl+Space in the Code Editor).

Math constants

In addition, several commonly used math constants are predefined in mikroBasic PRO for AVR:

```
PI          =  3.1415926
PI_HALF     =  1.5707963
TWO_PI      =  6.2831853
E           =  2.7182818
```

Predefined project level defines

These defines are based on a value that you have entered/edited in the current project, and it is equal to the name of selected device for the project.
If ATmega16 is selected device, then ATmega16 token will be defined as 1, so it can be used for conditional compilation:

```
#IFDEF ATmega16
...
#ENDIF
```

Related topics: Project level defines

ACCESSING INDIVIDUAL BITS

The mikroBasic PRO for AVR allows you to access individual bits of 8-bit variables. It also supports sbit and bit data types

Accessing Individual Bits Of Variables

To access the individual bits, simply use the direct member selector (.) with a variable, followed by one of identifiers B0, B1, … , B7, or 0, 1, … 7, with 7 being the most significant bit :

```
// Clear bit 0 on PORTA
PORTA.B0 = 0

// Clear bit 5 on PORTB
PORTB.5 = 0
```

There is no need of any special declarations. This kind of selective access is an intrinsic feature of mikroBasic PRO for AVR and can be used anywhere in the code. Identifiers B0–B7 are not case sensitive and have a specific namespace. You may override them with your own members B0–B7 within any given structure.

See Predefined Globals and Constants for more information on register/bit names.

sbit type

The mikroBasic PRO for AVR compiler has sbit data type which provides access to bit-addressable SFRs. You can access them in several ways:

```
dim LEDA as sbit at PORTA.B0
dim Name as sbit at sfr-name.B<bit-position>

dim LEDB as sbit at PORTB.0
dim Name as sbit at sfr-name.<bit-position>
```

bit type

The mikroBasic PRO for AVR compiler provides a `bit` data type that may be used for variable declarations. It can not be used for argument lists, and function-return values.

```
dim bf as bit   ' bit variable
```

There are no pointers to bit variables:

```
dim ptr as ^bit      ' invalid
```

An array of type bit is not valid:

```
dim arr as array[5] of bit      ' invalid
```

Note :

- Bit variables can not be initialized.
- Bit variables can not be members of structures.
- Bit variables do not have addresses, therefore unary operator `@` (address of) is not applicable to these variables.

Related topics: Predefined globals and constants

INTERRUPTS

AVR derivates acknowledges an interrupt request by executing a hardware generated CALL to the appropriate servicing routine ISRs. ISRs are organized in IVT. ISR is defined as a standard function but with the `org` directive afterwards which connects the function with specific interrupt vector. For example org 0x000B is IVT address of Timer/Counter 2 Overflow interrupt source of the ATMEGA16.
For more information on interrupts and IVT refer to the specific data sheet.

Function Calls from Interrupt

Calling functions from within the interrupt routine is allowed. The compiler takes care about the registers being used, both in "interrupt" and in "main" thread, and performs "smart" context-switching between them two, saving only the registers that have been used in both threads. It is not recommended to use function call from interrupt. In case of doing that take care of stack depth.

```
sub procedure Interrupt() org 0x16
   RS485Master_Receive(dat)
end sub
```

Most of the MCUs can access interrupt service routines directly, but some can not reach interrupt service routines if they are allocated on addresses greater than 2K from the IVT. In this case, compiler automatically creates Goto table, in order to jump to such interrupt service routines.

These principles can be explained on the picture below :

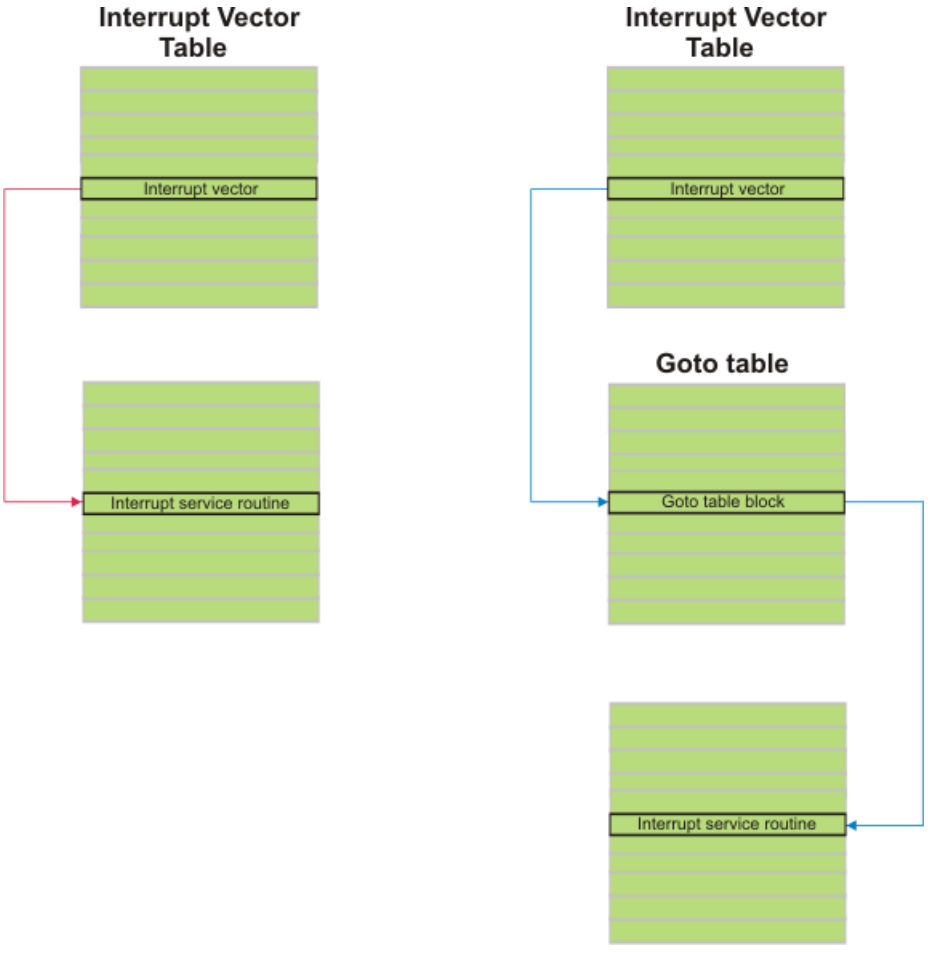

Direct accessing interrupt service routine and accessing interrupt service routine via Goto table.

LINKER DIRECTIVES

mikroBasic PRO for AVR uses internal algorithm to distribute objects within memory. If you need to have a variable or routine at the specific predefined address, use the linker directives `absolute` and `org`.

Note: You must specify an even address when using the linker directives.

Directive absolute

The directive `absolute` specifies the starting address in RAM for a variable. If the variable spans more than 1 word (16-bit), higher words will be stored at the consecutive locations.

The `absolute` directive is appended to the declaration of a variable:

```
dim x as word absolute 0x32
' Variable x will occupy 1 word (16 bits) at address 0x32

dim y as longint absolute 0x34
' Variable y will occupy 2 words at addresses 0x34 and 0x36
```

Be careful when using absolute directive, as you may overlap two variables by accident. For example:

```
dim  i as word absolute 0x42
' Variable i will occupy 1 word at address 0x42;

dim jj as longint absolute 0x40
' Variable will occupy 2 words at 0x40 and 0x42; thus,
' changing i changes jj at the same time and vice versa
```

Note: You must specify an even address when using the directive absolute.

Directive org

The directive `org` specifies the starting address of a routine in ROM. It is appended to the declaration of routine. For example:

```
sub procedure proc(dim par as word) org 0x200
' Procedure will start at the address 0x200;
...
end sub
```

Note: You must specify an even address when using the directive `org`.

BUILT-IN ROUTINES

The mikroBasic PRO for AVR compiler provides a set of useful built-in utility functions.

The `Lo, Hi, Higher, Highest` routines are implemented as macros. If you want to use these functions you must include `built_in.h` header file (located in the `include` folder of the compiler) into your project.

The `Delay_us` and `Delay_ms` routines are implemented as “inline”; i.e. code is generated in the place of a call, so the call doesn’t count against the nested call limit.

The `Vdelay_ms`, `Delay_Cyc` and `Get_Fosc_kHz` are actual Basic routines. Their sources can be found in `Delays.mbas` file located in the `uses` folder of the compiler.

- Lo
- Hi
- Higher
- Highest

- Inc
- Dec

- Delay_us
- Delay_ms
- Vdelay_ms
- Delay_Cyc

- Clock_Khz
- Clock_Mhz

- SetFuncCall

Lo

Prototype	`sub function Lo(number as longint) as byte`
Returns	Lowest 8 bits (byte) of `number`, bits `7..0`.
Description	Function returns the lowest byte of `number`. Function does not interpret bit patterns of `number` – it merely returns 8 bits as found in register. This is an “inline” routine; code is generated in the place of the call, so the call doesn’t count against the nested call limit.
Requires	Arguments must be variable of scalar type (i.e. Arithmetic Types and Pointers).
Example	`d = 0x1AC30F4` `tmp = Lo(d)  ' Equals 0xF4`

Hi

Prototype	`sub function Hi(number as longint) as byte`
Returns	Returns next to the lowest byte of number, bits 8..15.
Description	Function returns next to the lowest byte of `number`. Function does not interpret bit patterns of `number` – it merely returns 8 bits as found in register. This is an “inline” routine; code is generated in the place of the call, so the call doesn’t count against the nested call limit.
Requires	Arguments must be variable of scalar type (i.e. Arithmetic Types and Pointers).
Example	`d = 0x1AC30F4` `tmp = Hi(d)  ' Equals 0x30`

Higher

Prototype	`sub function Higher(number as longint) as byte`
Returns	Returns next to the highest byte of `number`, bits 16..23.
Description	Function returns next to the highest byte of `number`. Function does not interpret bit patterns of `number` – it merely returns 8 bits as found in register. This is an “inline” routine; code is generated in the place of the call, so the call doesn’t count against the nested call limit.
Requires	Arguments must be variable of scalar type (i.e. Arithmetic Types and Pointers).
Example	`d = 0x1AC30F4` `tmp = Higher(d)  ' Equals 0xAC`

Highest

Prototype	`sub function Highest(number as longint) as byte`
Returns	Returns the highest byte of `number`, bits 24..31.
Description	Function returns the highest byte of `number`. Function does not interpret bit patterns of `number` – it merely returns 8 bits as found in register. This is an “inline” routine; code is generated in the place of the call, so the call doesn’t count against the nested call limit.
Requires	Arguments must be variable of scalar type (i.e. Arithmetic Types and Pointers).
Example	`d = 0x1AC30F4` `tmp = Highest(d)  ' Equals 0x01`

Inc

Prototype	`sub procedure Inc(dim byref par as longint)`
Returns	Nothing.
Description	Increases parameter `par` by 1.
Requires	Nothing.
Example	`p = 4` `Inc(p)  ' p is now 5`

Dec

Prototype	`sub procedure Dec(dim byref par as longint)`
Returns	Nothing.
Description	Decreases parameter `par` by 1.
Requires	Nothing.
Example	`p = 4` `Dec(p)  ' p is now 3`

Delay_us

Prototype	`sub procedure Delay_us(const time_in_us as longword)`
Returns	Nothing.
Description	Creates a software delay in duration of `time_in_us` microseconds (a constant). Range of applicable constants depends on the oscillator frequency. This is an “inline” routine; code is generated in the place of the call, so the call doesn’t count against the nested call limit.
Requires	Nothing.
Example	`Delay_us(1000)  ' One millisecond pause`

Delay_ms

Prototype	`sub procedure Delay_ms(const time_in_ms as longword)`
Returns	Nothing.
Description	Creates a software delay in duration of `time_in_ms` milliseconds (a constant). Range of applicable constants depends on the oscillator frequency. This is an “inline” routine; code is generated in the place of the call, so the call doesn’t count against the nested call limit.
Requires	Nothing.
Example	`Delay_ms(1000)  ' One second pause`

Vdelay_ms

Prototype	`sub procedure Vdelay_ms(time_in_ms as word)`
Returns	Nothing.
Description	Creates a software delay in duration of `time_in_ms` milliseconds (a variable). Generated delay is not as precise as the delay created by Delay_ms. Note that `Vdelay_ms` is library function rather than a built-in routine; it is presented in this topic for the sake of convenience.
Requires	Nothing.

Example	`pause = 1000`
	`' ...`
	`Vdelay_ms(pause)  ' ~ one second pause`

Delay_Cyc

Prototype	`sub procedure Delay_Cyc(Cycles_div_by_10 as byte)`
Returns	Nothing.
Description	Creates a delay based on MCU clock. Delay lasts for 10 times the input parameter in MCU cycles. Note that `Delay_Cyc` is library function rather than a built-in routine; it is presented in this topic for the sake of convenience. There are limitations for Cycles_div_by_10 value. Value Cycles_div_by_10 must be between 2 and 257.
Requires	Nothing.
Example	`Delay_Cyc(10)  ' Hundred MCU cycles pause`

Clock_KHz

Prototype	`sub function Clock_Khz() as word`
Returns	Device clock in KHz, rounded to the nearest integer.
Description	Function returns device clock in KHz, rounded to the nearest integer. This is an “inline” routine; code is generated in the place of the call, so the call doesn’t count against the nested call limit.
Requires	Nothing.
Example	`clk = Clock_kHz()`

Clock_MHz

Prototype	`sub function Clock_MHz() as byte`
Returns	Device clock in MHz, rounded to the nearest integer.
Description	Function returns device clock in MHz, rounded to the nearest integer. This is an “inline” routine; code is generated in the place of the call, so the call doesn’t count against the nested call limit.
Requires	Nothing.
Example	`clk = Clock_Mhz()`

SetFuncCall

Prototype	`sub procedure SetFuncCall(FuncName as string)`
Returns	Nothing.
Description	Function informs the linker about a specific routine being called. SetFuncCall has to be called in a routine which accesses another routine via a pointer. Function prepares the caller tree, and informs linker about the procedure usage, making it possible to link the called routine.
Requires	Nothing.

Example	`sub procedure first(p, q as byte)`
	`...`
	`  SetFuncCall(second) ' let linker know that we will call the routine 'second'`
	`...`
	`end sub`

CODE OPTIMIZATION

Optimizer has been added to extend the compiler usability, cut down the amount of code generated and speed-up its execution. The main features are:

Constant folding

All expressions that can be evaluated in the compile time (i.e. are constant) are being replaced by their results. (3 + 5 -> 8);

Constant propagation

When a constant value is being assigned to a certain variable, the compiler recognizes this and replaces the use of the variable by constant in the code that follows, as long as the value of a variable remains unchanged.

Copy propagation

The compiler recognizes that two variables have the same value and eliminates one of them further in the code.

Value numbering

The compiler "recognizes" if two expressions yield the same result and can therefore eliminate the entire computation for one of them.

"Dead code" ellimination

The code snippets that are not being used elsewhere in the programme do not affect the final result of the application. They are automatically removed.

Stack allocation

Temporary registers ("Stacks") are being used more rationally, allowing VERY complex expressions to be evaluated with a minimum stack consumption.

Local vars optimization

No local variables are being used if their result does not affect some of the global or volatile variables.

Better code generation and local optimization

Code generation is more consistent and more attention is payed to implement specific solutions for the code "building bricks" that further reduce output code size.

CHAPTER 4

AVR Specifics

Types Efficiency

First of all, you should know that AVR ALU, which performs arithmetic operations, is optimized for working with bytes. Although mikroBasic PRO for AVR is capable of handling very complex data types, AVR may choke on them, especially if you are working on some of the older models. This can dramatically increase the time needed for performing even simple operations. Universal advice is to use the smallest possible type in every situation. It applies to all programming in general, and doubly so with microcontrollers. Types efficiency is determined by the part of RAM memory that is used to store a variable/constant.

Nested Calls Limitations

There are no Nested Calls Limitations, except by RAM size. A Nested call represents a function call to another function within the function body. With each function call, the stack increases for the size of the returned address. Number of nested calls is equel to the capacity of RAM which is left out after allocation of all variables.

Important notes:

- There are many different types of derivates, so it is necessary to be familiar with characteristics and special features of the microcontroller in you are using.
- Some of the AVR MCUs have hardware multiplier. Due to this, be sure to pay attention when porting code from one MCU to another, because compiled code can vary by its size.
- Not all microcontrollers share the same instruction set. It is advisable to carefully read the instruction set of the desired MCU, before you start writing your code. Compiler automatically takes care of appropiate instruction set, and if unapropriate asm instruction is used in in-line assembly, compiler will report an error.
- Program counter size is MCU dependent. Thus, there are two sets of libraries :
    - MCUs with program counter size larger than 16 bits (flash memory size larger than 128kb)
    - MCUs with program counter size less or equal 16 bits (flash memory size smaller than 128kb)
- Assembly SPM instruction and its derivates must reside in Boot Loader section of program memory.
- Part of flash memory can be dedicated to Boot Loader code. For details, refer to AVR memory organization.

Related topics: mikroBasic PRO for AVR specifics, AVR memory organization

AVR MEMORY ORGANIZATION

The AVR microcontroller's memory is divided into Program Memory and Data Memory. Program Memory (ROM) is used for permanent saving program being executed, while Data Memory (RAM) is used for temporarily storing and keeping intermediate results and variables.

Program Memory (ROM)

Program Memory (ROM) is used for permanent saving program (CODE) being executed, and it is divided into two sections, Boot Program section and the Application Program section. The size of these sections is configured by the BOOTSZ fuse. These two sections can have different level of protection since they have different sets of Lock bits.
Depending on the settings made in compiler, program memory may also used to store a constant variables. The AVR executes programs stored in program memory only. `code` memory type specifier is used to refer to program memory.

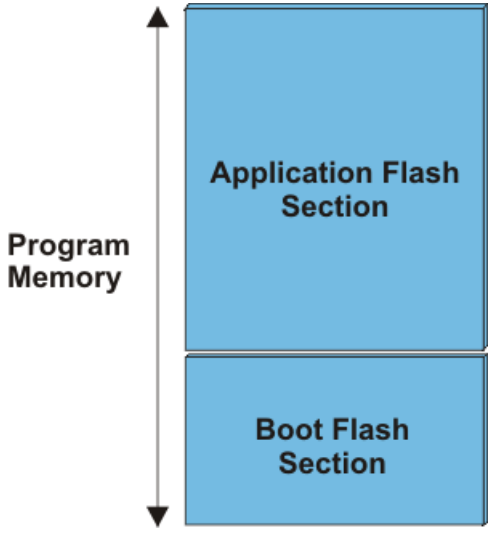

Data Memory

Data memory consists of :

- Rx space
- I/O Memory
- Extended I/O Memory (MCU dependent)
- Internal SRAM

Rx space consists of 32 general purpose working 8-bit registers (R0-R31). These registers have the shortest (fastest) access time, which allows single-cycle Arithmetic Logic Unit (ALU) operation.
I/O Memory space contains addresses for CPU peripheral function, such as Control registers, SPI, and other I/O functions.
Due to the complexity, some AVR microcontrollers with more peripherals have Extended I/O memory, which occupies part of the internal SRAM. Extended I/O memory is MCU dependent.
Storing data in I/O and Extended I/O memory is handled by the compiler only. Users can not use this memory space for storing their data.
Internal SRAM (Data Memory) is used for temporarily storing and keeping intermediate results and variables (static link and dynamic link).

There are four memory type specifiers that can be used to refer to the data memory: rx, data, io, sfr i register.

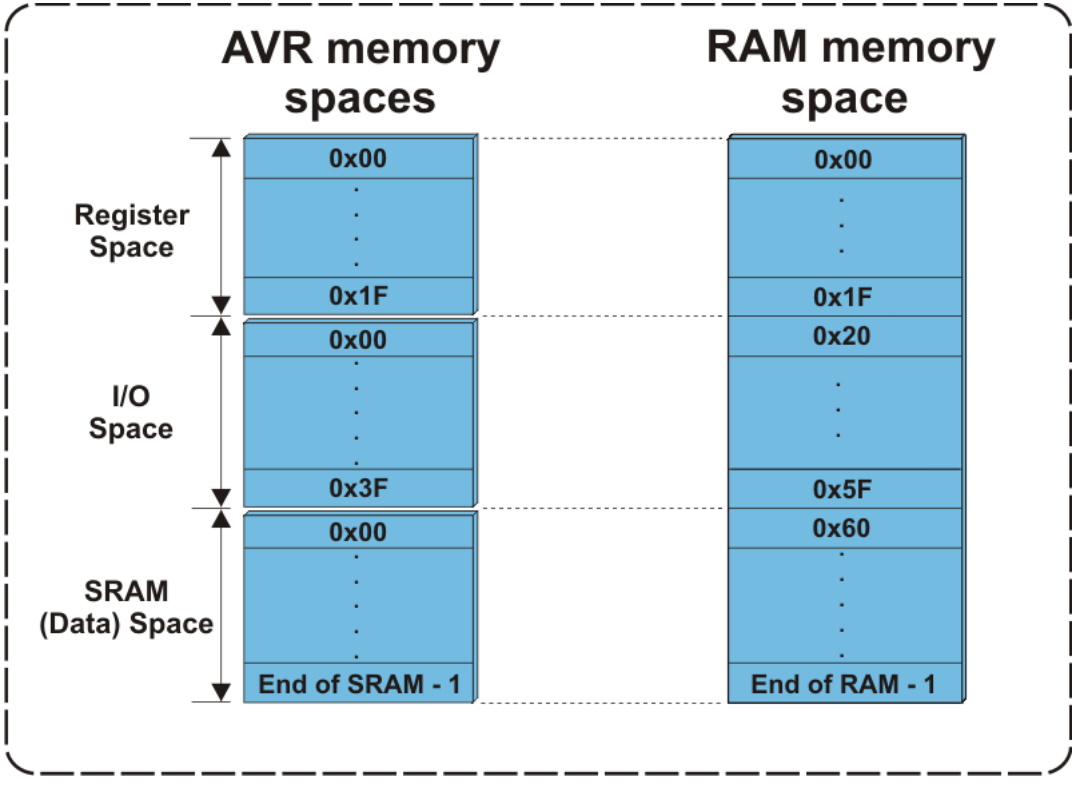

Related topics: Accessing individual bits, SFRs, Memory type specifiers

MEMORY TYPE SPECIFIERS

The mikroBasic PRO for AVR supports usage of all memory areas. Each variable may be explicitly assigned to a specific memory space by including a memory type specifier in the declaration, or implicitly assigned.

The following memory type specifiers can be used:

- code
- data
- rx
- io
- sfr
- register

Memory type specifiers can be included in variable declaration.
For example:

```
dim data_buffer as byte data          ' puts data_buffer in data ram
const txt = "Enter parameter" code   ' puts text in program memory
```

code

Description	The code memory type may be used for allocating constants in program memory.
Example	`' puts txt in program memory` `const txt = "Enter parameter" code`

data

Description	This memory specifier is used when storing variable to the internal data SRAM.
Example	`' puts data_buffer in data ram` `dim data_buffer as byte data`

rx

Description	This memory specifier allows variable to be stored in the Rx space (Register file). **Note:** In most of the cases, there will be enough space left for the user variables in the Rx space. However, since compiler uses Rx space for storing temporary variables, it might happen that user variables will be stored in the internal data SRAM, when writing complex programs.
Example	`' puts y in Rx space` `dim y as char rx`

io

Description	This memory specifier allows user to access the I/O Memory space.
Example	`' put io_buff in io memory space` `dim io_buff as byte io`

sfr

Description	This memory specifier in combination with (`rx, io, data`) allows user to access special function registers. It also instructs compiler to maintain same identifier in Basic and assembly.

Example	`dim io_buff as byte io sfr ' put io_buff in I/O memory space`
	`dim y as char rx sfr ' puts y in Rx space`
	`dim temp as byte data sfr and dim temp as byte sfr are equivalent, and put temp in Extended I/O Space.`

register

Description	If no other memory specifier is used (`rx, io, sfr, code` or `data`), the `register` specifer places variable in Rx space, and instructs compiler to maintain same identifier in C and assembly.
Example	`dim y as char register`

Note: If none of the memory specifiers are used when declaring a variable, data specifier will be set as default by the compiler.

Related topics: AVR Memory Organization, Accessing individual bits, SFRs, Constants, Functions

CHAPTER 5

mikroBasic PRO for AVR Language Reference

The mikroBasic PRO for AVR Language Reference describes the syntax, semantics and implementation of the mikroBasic PRO for AVR language.

The aim of this reference guide is to provide a more understandable description of the mikroBasic PRO for AVR language to the user.

MIKROBASIC PRO FOR AVR LANGUAGE REFERENCE

Lexical Elements
- Whitespace
- Comments
- Tokens
  - Literals
  - Keywords
  - Identifiers
  - Punctuators

Program Organization
- Program Organization
- Scope and Visibility
- Modules

Variables
Constants
Labels
Symbols
Functions and Procedures
- Functions
- Procedures

Types
- Simple Types
- Arrays
- Strings
- Pointers
- Structures
- Types Conversions
  - Implicit Conversion
  - Explicit Conversion

Operators
- Introduction to Operators
- Operators Precedence and Associativity
- Arithmetic Operators
- Relational Operators
- Bitwise Operators
- Boolean Operators

Expressions
- Expressions

Statements
- Introduction to Statements
- Assignment Statements
- Conditional Statements

If Statement
Select Case Statement
Iteration Statements (Loops)
For Statement
While Statement
Do Statement
Jump Statements
Break and Continue Statements
Exit Statement
Goto Statement
Gosub Statement
asm Statement
Directives
Compiler Directives
Linker Directives

LEXICAL ELEMENTS OVERVIEW

These topics provide a formal definition of the mikroBasic PRO for AVR lexical elements. They describe different categories of word-like units (tokens) recognized by the language.

In tokenizing phase of compilation, the source code file is parsed (that is, broken down) into tokens and whitespace. The tokens in mikroBasic PRO are derived from a series of operations performed on your programs by the compiler.

A mikroBasic PRO program starts as a sequence of ASCII characters representing the source code, created by keystrokes using a suitable text editor (such as the mikroBasic PRO Code Editor). The basic program unit in mikroBasic PRO is a file. This usually corresponds to a named file located in RAM or on disk, having the extension `.mbas`.

WHITESPACE

Whitespace is a collective name given to spaces (blanks), horizontal and vertical tabs, and comments. Whitespace serves to indicate where tokens start and end, but beyond this function, any surplus whitespace is discarded.

For example, the two sequences

```
dim tmp as byte
dim j as word
```

and

```
dim  tmp  as  byte
dim    j  as  word
```

are lexically equivalent and parse identically.

Newline Character

Newline character (CR/LF) is not a whitespace in BASIC, and serves as a statement terminator/separator. In mikroBasic PRO for AVR, however, you may use newline to break long statements into several lines. Parser will first try to get the longest possible expression (across lines if necessary), and then check for statement terminators.

Whitespace in Strings

The ASCII characters representing whitespace can occur within string literals, where they are protected from the normal parsing process (they remain as a part of the string). For example, statement

```
some_string = "mikro foo"
```

parses to four tokens, including a single string literal token:

```
some_string
=
"mikro foo"
newline character
```

COMMENTS

Comments are pieces of text used to annotate a program, and are technically another form of whitespace. Comments are for the programmer's use only; they are stripped from the source text before parsing.

Use the apostrophe to create a comment:

```
' Any text between an apostrophe and the end of the
' line constitutes a comment. May span one line only.
```

There are no multi-line comments in mikroBasic PRO for AVR

TOKENS

Token is the smallest element of a mikroBasic PRO for AVR program, meaningful to the compiler. The parser separates tokens from the input stream by creating the longest token possible using the input characters in a left–to–right scan.

mikroBasic PRO for AVR recognizes the following kinds of tokens:

- keywords
- identifiers
- constants
- operators
- punctuators (also known as separators)

Token Extraction Example

Here is an example of token extraction. See the following code sequence:

```
end_flag = 0
```

The compiler would parse it into four tokens:

```
end_flag   ' variable identifier
=          ' assignment operator
0          ' literal
newline    ' statement terminator
```

Note that `end_flag` would be parsed as a single identifier, rather than the keyword end followed by the identifier `_flag`.

LITERALS

Literals are tokens representing fixed numeric or character values.

The data type of a constant is deduced by the compiler using such clues as numeric value and format used in the source code.

Integer Literals

Integral values can be represented in decimal, hexadecimal or binary notation.

In decimal notation, numerals are represented as a sequence of digits (without commas, spaces or dots), with optional prefix + or - operator to indicate the sign. Values default to positive (`6258` is equivalent to `+6258`).

The dollar-sign prefix (`$`) or the prefix `0x` indicates a hexadecimal numeral (for example, `$8F` or `0x8F`).

The percent-sign prefix (`%`) indicates a binary numeral (for example, `%0101`).

Here are some examples:

```
11      ' decimal literal
$11     ' hex literal, equals decimal 17
0x11    ' hex literal, equals decimal 17
%11     ' binary literal, equals decimal 3
```

The allowed range of values is imposed by the largest data type in mikroBasic PRO for AVR – `longword`. The compiler will report an error if the literal exceeds `4294967295` (`$FFFFFFFF`).

Floating Point Literals

A floating-point value consists of:

- Decimal integer
- Decimal point
- Decimal fraction
- e or E and a signed integer exponent (optional)

You can omit either decimal integer or decimal fraction (but not both).

Negative floating constants are taken as positive constants with the unary operator minus (-) prefixed.

mikroBasic PRO limits floating-point constants to the range of ±1.17549435082 * 10-38 .. ±6.80564774407 * 1038.

Here are some examples:

```
0.              ' = 0.0
-1.23           ' = -1.23
23.45e6         ' = 23.45 * 10^6
2e-5            ' = 2.0 * 10^-5
3E+10           ' = 3.0 * 10^10
.09E34          ' = 0.09 * 10^34
```

Character Literals

Character literal is one character from the extended ASCII character set, enclosed with quotes (for example, `"A"`). Character literal can be assigned to variables of `byte` and `char` type (variable of `byte` will be assigned the ASCII value of the character). Also, you can assign character literal to a string variable.

String Literals

String literal is a sequence of characters from the extended ASCII character set, enclosed with quotes. Whitespace is preserved in string literals, i.e. parser does not “go into” strings but treats them as single tokens.

Length of string literal is a number of characters it consists of. String is stored internally as the given sequence of characters plus a final `null` character. This `null` character is introduced to terminate the string, it does not count against the string’s total length.

String literal with nothing in between the quotes (null string) is stored as a single null character.

You can assign string literal to a string variable or to an array of char.

Here are several string literals:

```
"Hello world!"              ' message, 12 chars long
"Temperature is stable"     ' message, 21 chars long
"  "                        ' two spaces, 2 chars long
"C"                         ' letter, 1 char long
""                          ' null string, 0 chars long
```

The quote itself cannot be a part of the string literal, i.e. there is no escape sequence. You could use the built-in function Chr to print a quote: `Chr(34)`. Also, see String Splicing.

KEYWORDS

Keywords are special-purpose words which cannot be used as normal identifier names.

Beside standard BASIC keywords, all relevant SFR are defined as global variables and represent reserved words that cannot be redefined (for example: `P0`, `TMR1`, `T1CON`, etc). Probe Code Assistant for specific letters (Ctrl+Space in Editor) or refer to Predefined Globals and Constants.

Here is the alphabetical listing of keywords in mikroBasic PRO for AVR:

Abstract	Far	Override	Then
And	File	package	Threadvar
Array	Finalization	Packed	To
As	Finally	Pascal	Try
at	For	pdata	Type
Asm	Forward	platform	Unit
Assembler	Function	Private	Until
Automated	Goto	Procedure	Uses
bdata	idata	Program	Var
Begin	If	Property	Virtual
bit	ilevel	Protected	Volatile
Case	Implementation	Public	While
Cdecl	In	Published	With
Class	Index	Raise	Write
Code	Inherited	Read	Writeonly
compact	Initialization	Readonly	xdata
Const	Inline	Record	Xor
Constructor	Interface	Register	
Contains	Is	Reintroduce	
Data	Label	Repeat	
Default	large	requires	
deprecated	Library	Reset	
Destructor	Message	Resourcestring	
Dispid	Mod	Resume	
Dispinterface	name	Safecall	
Div	Near	sbit	
Do	Nil	Set	
Downto	Not	sfr	
Dynamic	Object	Shl	
Else	Of	Shr	
End	on	small	
Except	Or	Stdcall	
Export	org	Stored	
Exports	Out	String	
External	overload	Stringresource	

Also, mikroBasic PRO for AVR includes a number of predefined identifiers used in libraries. You could replace them by your own definitions, if you plan to develop your own libraries. For more information, see mikroBasic PRO for AVR Libraries.

IDENTIFIERS

Identifiers are arbitrary names of any length given to functions, variables, symbolic constants, user-defined data types and labels. All these program elements will be referred to as objects throughout the help (don't be confused with the meaning of object in object-oriented programming).

Identifiers can contain letters from `a` to `z` and `A` to `Z`, the underscore character "_" and digits from `0` to `9`. First character must be a letter or an underscore, i.e. identifier cannot begin with a numeral.

Case Sensitivity

mikroBasic PRO for AVR is not case sensitive, so `Sum, sum,` and `suM` are equivalent identifiers.

Uniqueness and Scope

Although identifier names are arbitrary (within the rules stated), errors result if the same name is used for more than one identifier within the same scope. Simply, duplicate names are illegal within the same scope. For more information, refer to Scope and Visibility.

Identifier Examples

Here are some valid identifiers:

```
temperature_V1
Pressure
no_hit
dat2string
SUM3
_vtext
```

… and here are some invalid identifiers:

```
7temp         ' NO -- cannot begin with a numeral
%higher       ' NO -- cannot contain special characters
xor           ' NO -- cannot match reserved word
j23.07.04     ' NO -- cannot contain special characters (dot)
```

PUNCTUATORS

The mikroBasic PRO punctuators (also known as separators) are:

- [ ] – Brackets
- ( ) – Parentheses
- , – Comma
- : – Colon
- . – Dot

Brackets

Brackets `[ ]` indicate single and multidimensional array subscripts:

```
dim alphabet as byte[ 30]
' ...
alphabet[ 2] = "c"
```

For more information, refer to Arrays.

Parentheses

Parentheses `( )` are used to group expressions, isolate conditional expressions and indicate function calls and function declarations:

```
d = c * (a + b)                  ' Override normal precedence
if (d = z) then ...              ' Useful with conditional statements
func()                           ' Function call, no arguments
sub function func2(dim n as word)' Function declaration w/ parameters
```

For more information, refer to Operators Precedence and Associativity, Expressions, or Functions and Procedures.

Comma

Comma (,) separates the arguments in function calls:

```
Lcd_Out(1, 1, txt)
```

Furthermore, the comma separates identifiers in declarations:

```
dim i, j, k as word
```

The comma also separates elements in initialization lists of constant arrays:

```
const MONTHS as byte[ 12] = (31,28,31,30,31,30,31,31,30,31,30,31)
```

Colon

Colon (:) is used to indicate a labeled statement:

```
start:  nop
  '...
goto start
```

For more information, refer to Labels.

Dot

Dot (.) indicates access to a structure member. For example:

```
person.surname = "Smith"
```

For more information, refer to Structures.

Dot is a necessary part of floating point literals. Also, dot can be used for accessing individual bits of registers in mikroBasic PRO.

PROGRAM ORGANIZATION

mikroBasic PRO for AVR imposes strict program organization. Below you can find models for writing legible and organized source files. For more information on file inclusion and scope, refer to Modules and to Scope and Visibility.

Organization of Main Module

Basically, a main source file has two sections: declaration and program body. Declarations should be in their proper place in the code, organized in an orderly manner. Otherwise, the compiler may not be able to comprehend the program correctly.

When writing code, follow the model presented below. The main module should look like this:

```
program <program name>
include <include other modules>

'******************************************************
'* Declarations (globals):
'******************************************************

' symbols declarations
symbol ...

' constants declarations
const ...

' structures declarations
structure ...

' variables declarations
dim  Name[,  Name2...]  as  [^]type  [absolute  0x123]  [external]
[volatile] [register] [sfr]

' procedures declarations
sub procedure procedure_name(...)
  <local declarations>
  ...
end sub

' functions declarations
sub function function_name(...) as return_type
  <local declarations>
  ...
end sub

'******************************************************
'* Program body:
'******************************************************

main:
  ' write your code here
end.
```

Organization of Other Modules

Modules other than main start with the keyword `module`. Implementation section starts with the keyword `implements`. Follow the model presented below:

```
module  <module name>
include <include other modules>

'*******************************************************
'* Interface (globals):
'*******************************************************

' symbols declarations
symbol ...

' constants declarations
const ...

' structures declarations
structure ...

' variables declarations
dim  Name[ ,  Name2...]  as  [ ^] type  [ absolute  0x123]  [ external]
[ volatile] [ register] [ sfr]

' procedures prototypes
sub procedure sub_procedure_name([ dim byref] [ const] ParamName as
[ ^] type, [ dim byref] [ const] ParamName2, ParamName3 as [ ^] type)

' functions prototypes
sub function sub_function_name([ dim byref] [ const] ParamName as
[ ^] type, [ dim byref] [ const] ParamName2, ParamName3 as [ ^] type) as
[ ^] type

'*******************************************************
'* Implementation:
'*******************************************************

implements

' constants declarations
const ...

' variables declarations
dim ...
```

```
' procedures declarations
sub procedure sub_procedure_name([dim byref] [const] ParamName as
[^]type, [dim byref] [const] ParamName2, ParamName3 as [^]type);
[ilevel 0x123] [overload] [forward]
  <local declarations>
  ...
end sub

' functions declarations
sub function sub_function_name([dim byref] [const] ParamName as
[^]type, [dim byref] [const] ParamName2, ParamName3 as [^]type) as
[^]type [ilevel 0x123] [overload] [forward]
  <local declarations>
  ...
end sub

end.
```

Note: Sub functions and sub procedures must have the same declarations in the interface and implementation section. Otherwise, compiler will report an error.

SCOPE AND VISIBILITY

Scope

The scope of identifier is a part of the program in which the identifier can be used to access its object. There are different categories of scope, depending on how and where identifiers are declared:

Place of declaration	Scope
Identifier is declared in the declaration section of the main module, out of any function or procedure	Scope extends from the point where it is declared to the end of the current file, including all routines enclosed within that scope. These identifiers have a file scope and are referred to as globals.
Identifier is declared in the function or procedure	Scope extends from the point where it is declared to the end of the current routine. These identifiers are referred to as locals.
Identifier is declared in the interface section of the module	Scope extends the interface section of a module from the point where it is declared to the end of the module, and to any other module or program that uses that module. The only exception are symbols which have a scope limited to the file in which they are declared.
Identifier is declared in the implementation section of the module, but not within any function or procedure	Scope extends from the point where it is declared to the end of the module. The identifier is available to any function or procedure in the module.

Visibility

The visibility of an identifier is a region of the program source code from where a legal access to the identifier's associated object can be made .

Scope and visibility usually coincide, though there are circumstances under which an object becomes temporarily hidden by the appearance of a duplicate identifier: the object still exists but the original identifier cannot be used to access it until the scope of the duplicate identifier is ended.

Technically, visibility cannot exceed scope, but scope can exceed visibility.

MODULES

In mikroBasic PRO for AVR, each project consists of a single project file and one or more module files. The project file, with extension `.mbpav` contains information on the project, while modules, with extension `.mbas`, contain the actual source code. See Program Organization for a detailed look at module arrangement.

Modules allow you to:

- break large programs into encapsulated modules that can be edited separately,
- create libraries that can be used in different projects,
- distribute libraries to other developers without disclosing the source code.

Each module is stored in its own file and compiled separately; compiled modules are linked to create an application. To build a project, the compiler needs either a source file or a compiled module file for each module.

Include Clause

mikroBasic PRO for AVR includes modules by means of the include clause. It consists of the reserved word include, followed by a quoted module name. Extension of the file should not be included.

You can include one file per include clause. There can be any number of the include clauses in each source file, but they all must be stated immediately after the program (or module) name.

Here's an example:

```
program MyProgram

include "utils"
include "strings"
include "MyUnit"

...
```

For the given module name, the compiler will check for the presence of .mcl and .mbas files, in order specified by search paths.

- If both `.mbas` and `.mcl` files are found, the compiler will check their dates and include the newer one in the project. If the `.mbas` file is newer than the `.mcl`, then `.mbas` file will be recompiled and new `.mcl` will be created, overwriting the old `.mcl`.
- If only the `.mbas` file is found, the compiler will create the `.mcl` file and include it in the project;
- If only the `.mcl` file is present, i.e. no source code is available, the compiler will include it as found;
- If none of the files found, the compiler will issue a "File not found" warning.

Main Module

Every project in mikroBasic PRO for AVR requires a single main module file. The main module is identified by the keyword `program` at the beginning. It instructs the compiler where to “start”.

After you have successfully created an empty project with Project Wizard, Code Editor will display a new main module. It contains the bare-bones of the program:

```
program MyProject

' main procedure
main:
  ' Place program code here
end.
```

Other than comments, nothing should precede the keyword `program`. After the program name, you can optionally place the `include` clauses.

Place all global declarations (constants, variables, labels, routines, structures) before the label `main`.

Other Modules

Modules other than main start with the keyword `module`. Newly created blank module contains the bare-bones:

```
module MyModule

implements

end.
```

Other than comments, nothing should precede the keyword `module`. After the module name, you can optionally place the `include` clauses.

Interface Section

Part of the module above the keyword implements is referred to as interface section. Here, you can place global declarations (constants, variables, labels, routines, structures) for the project.

Do not define routines in the interface section. Instead, state the prototypes of routines (from implementation section) that you want to be visible outside the module. Prototypes must exactly match the declarations.

Implementation Section

Implementation section hides all the irrelevant innards from other modules, allowing encapsulation of code.

Everything declared below the keyword `implements` is private, i.e. has its scope limited to the file. When you declare an identifier in the implementation section of a module, you cannot use it outside the module, but you can use it in any block or routine defined within the module.

By placing the prototype in the interface section of the module (above the `implements`) you can make the routine public, i.e. visible outside of module. Prototypes must exactly match the declarations.

VARIABLES

Variable is an object whose value can be changed during the runtime. Every variable is declared under unique name which must be a valid identifier. This name is used for accessing the memory location occupied by the variable.

Variables are declared in the declaration part of the file or routine — each variable needs to be declared before it is used. Global variables (those that do not belong to any enclosing block) are declared below the `include` statements, above the label `main`.

Specifying a data type for each variable is mandatory. mikroBasic PRO syntax for variable declaration is:

```
dim identifier_list as type
```

Here, `identifier_list` is a comma-delimited list of valid identifiers, and `type` can be any data type.

For more details refer to Types and Types Conversions. For more information on variables' scope refer to the chapter Scope and Visibility.

Here are a few examples:

```
dim i, j, k as byte
dim counter, temp as word
dim samples as longint[ 100]
```

Variables and AVR

Every declared variable consumes part of RAM memory. Data type of variable determines not only the allowed range of values, but also the space a variable occupies in RAM memory. Bear in mind that operations using different types of variables take different time to be completed. mikroBasic PRO for AVR recycles local variable memory space – local variables declared in different functions and procedures share the same memory space, if possible.

There is no need to declare SFR explicitly, as mikroBasic PRO for AVR automatically declares relevant registers as global variables of `word`. For example: `W0`, `TMR1`, etc.

CONSTANTS

Constant is a data whose value cannot be changed during the runtime. Using a constant in a program consumes no RAM memory. Constants can be used in any expression, but cannot be assigned a new value.

Constants are declared in the declaration part of the program or routine, with the following syntax:

```
const constant_name [ as type] = value
```

Every constant is declared under unique `constant_name` which must be a valid identifier. It is a tradition to write constant names in uppercase. Constant requires you to specify `value`, which is a literal appropriate for the given type. `type` is optional and in the absence of it , the compiler assumes the “smallest” type that can accommodate value.

Note: You cannot omit type if declaring a constant array.

Here are a few examples:

```
const MAX as longint = 10000
const MIN = 1000        ' compiler will assume word type
const SWITCH = "n"      ' compiler will assume char type
const MSG = "Hello"     ' compiler will assume string type
const MONTHS as byte[ 12] = (31,28,31,30,31,30,31,31,30,31,30,31)
```

LABELS

Labels serve as targets for the goto and gosub statements. Mark the desired statement with label and colon like this:

```
label_identifier : statement
```

No special declaration of label is necessary in mikroBasic PRO for AVR.

Name of the label needs to be a valid identifier. The labeled statement and `goto/gosub` statement must belong to the same block. Hence it is not possible to jump into or out of routine. Do not mark more than one statement in a block with the same label.

Note: The label `main` marks the entry point of a program and must be present in the main module of every project. See Program Organization for more information.

Here is an example of an infinite loop that calls the procedure `Beep` repeatedly:

```
loop:
  Beep
goto loop
```

SYMBOLS

mikroBasic PRO symbols allow you to create simple macros without parameters. You can replace any line of code with a single identifier alias. Symbols, when properly used, can increase code legibility and reusability.

Symbols need to be declared at the very beginning of the module, right after the module name and (optional) `include` clauses. Check Program Organization for more details. Scope of a symbol is always limited to the file in which it has been declared.

Symbol is declared as:

```
symbol alias = code
```

Here, `alias` must be a valid identifier which you will use throughout the code. This identifier has a file scope. The `code` can be any line of code (literals, assignments, function calls, etc).

Using a symbol in the program consumes no RAM – the compiler will simply replace each instance of a symbol with the appropriate line of code from the declaration.

Here is an example:

```
symbol MAXALLOWED = 216           ' Symbol as alias for numeric value
symbol PORT = P0                  ' Symbol as alias for SFR
symbol MYDELAY = Delay_ms(1000)   ' Symbol as alias for procedure call

dim cnt as byte   ' Some variable

'...
main:

if cnt > MAXALLOWED then
  cnt = 0
  PORT.1 = 0
  MYDELAY
end if
```

Note: Symbols do not support macro expansion in a way the C preprocessor does.

FUNCTIONS AND PROCEDURES

Functions and procedures, collectively referred to as routines, are subprograms (self-contained statement blocks) which perform a certain task based on a number of input parameters. When executed, a function returns value while procedure does not.

Functions

Function is declared like this:

```
sub function function_name(parameter_list) as return_type
  [ local declarations ]
  function body
end sub
```

`function_name` represents a function's name and can be any valid identifier. `return_type` is a type of return value and can be any simple type. Within parentheses, `parameter_list` is a formal parameter list similar to variable declaration. In mikroBasic PRO for AVR, parameters are always passed to a function by value. To pass an argument by address, add the keyword `byref` ahead of identifier.

`Local declarations` are optional declarations of variables and/or constants, local for the given function. `Function body` is a sequence of statements to be executed upon calling the function.

Calling a function

A function is called by its name, with actual arguments placed in the same sequence as their matching formal parameters. The compiler is able to coerce mismatching arguments to the proper type according to implicit conversion rules. Upon a function call, all formal parameters are created as local objects initialized by values of actual arguments. Upon return from a function, a temporary object is created in the place of the call and it is initialized by the value of the function result. This means that function call as an operand in complex expression is treated as the function result.

In standard Basic, a `function_name` is automatically created local variable that can be used for returning a value of a function. mikroBasic PRO for AVR also allows you to use the automatically created local variable `result` to assign the return value of a function if you find function name to be too ponderous. If the return value of a function is not defined the compiler will report an error.

Function calls are considered to be primary expressions and can be used in situations where expression is expected. A function call can also be a self-contained statement and in that case the return value is discarded.

Example

Here's a simple function which calculates x^n based on input parameters `x` and `n` (`n > 0`):

```
sub function power(dim x, n as byte) as longint
dim i as byte
  result = 1
  if n > 0 then
    for i = 1 to n
      result = result*x
    next i
  end if
end sub
```

Now we could call it to calculate, say, 312:

```
tmp = power(3, 12)
```

PROCEDURES

Procedure is declared like this:

```
sub procedure procedure_name(parameter_list)
  [ local declarations ]
  procedure body
end sub
```

`procedure_name` represents a procedure's name and can be any valid identifier. Within parentheses, `parameter_list` is a formal parameter list similar to variable declaration. In mikroBasic PRO for AVR, parameters are always passed to procedure by value; to pass argument by address, add the keyword `byref` ahead of identifier.

`Local declarations` are optional declaration of variables and/or constants, local for the given procedure. `Procedure` body is a sequence of statements to be executed upon calling the procedure.

Calling a procedure

A procedure is called by its name, with actual arguments placed in the same sequence as their matching formal parameters. The compiler is able to coerce mismatching arguments to the proper type according to implicit conversion rules. Upon procedure call, all formal parameters are created as local objects initialized by values of actual arguments.

Procedure call is a self-contained statement.

Example

Here's an example procedure which transforms its input time parameters, preparing them for output on Lcd:

```
sub procedure time_prep(dim byref sec, min, hr as byte)
  sec  = ((sec and $F0) >> 4)*10 + (sec and $0F)
  min  = ((min and $F0) >> 4)*10 + (min and $0F)
  hr   = ((hr  and $F0) >> 4)*10 + (hr  and $0F)
end sub
```

Function Pointers

Function pointers are allowed in mikroBasic PRO for AVR. The example shows how to define and use a function pointer:

Example:

Example demonstrates the usage of function pointers. It is shown how to declare a procedural type, a pointer to function and finally how to call a function via pointer.

```
program Example;

typedef TMyFunctionType = function (dim param1, param2 as byte, dim
param3 as word) as word ' First, define the procedural type

dim MyPtr as ^TMyFunctionType  ' This is a pointer to previously
defined type
dim sample as word

sub function Func1(dim p1, p2 as byte, dim p3 as word) as word ' Now,
define few functions which will be pointed to. Make sure that param-
eters match the type definition
  result = p1 and p2 or p3
end sub

sub function Func2(dim abc, def as byte, dim ghi as word) as word  '
Another function of the same kind. Make sure that parameters match
the type definition
  result =  abc * def + ghi
end sub

sub function Func3(dim first, yellow as byte, dim monday as word) as
word  ' Yet another function. Make sure that parameters match the
type definition
  result =  monday - yellow - first
end sub
```

```
' main program:
main:
  MyPtr = @Func1              ' MyPtr now points to Func1
  Sample = MyPtr^(1, 2, 3)  ' Perform function call via pointer, call
Func1, the return value is 3
  MyPtr = @Func2              ' MyPtr now points to Func2
  Sample = MyPtr^(1, 2, 3)  ' Perform function call via pointer, call
Func2, the return value is 5
  MyPtr = @Func3              ' MyPtr now points to Func3
  Sample = MyPtr^(1, 2, 3)  ' Perform function call via pointer, call
Func3, the return value is 0
end.
```

A function can return a complex type. Follow the example bellow to learn how to declare and use a function which returns a complex type.

Example:

This example shows how to declare a function which returns a complex type.

```
program Example

structure TCircle        ' Structure
  dim CenterX, CenterY as word
  dim Radius as byte
end structure

dim MyCircle as TCircle ' Global variable

sub function DefineCircle(dim x, y as word, dim r as byte) as TCircle
' DefineCircle function returns a Structure
  result.CenterX = x
  result.CenterY = y
  result.Radius = r
end sub

main:
  MyCircle = DefineCircle(100, 200, 30)                        ' Get
a Structure via function call
   MyCircle.CenterX = DefineCircle(100, 200, 30).CenterX + 20   '
Access a Structure field via function call
  '                  |-----------------------| |-----|
  '                     |                         |
  '                   Function returns TCircle     Access to one
field of TCircle
end.
```

Forward declaration

A function can be declared without having it followed by it's implementation, by having it followed by the forward procedure. The effective implementation of that function must follow later in the module. The function can be used after a forward declaration as if it had been implemented already. The following is an example of a forward declaration:

```
program Volume

dim Volume as word

sub function First(a as word, b as word) as word forward

sub function Second(c as word) as word
dim tmp as word
  tmp = First(2, 3)
  result = tmp * c
end sub

sub function First(a, b as word) as word
  result = a * b
end sub

main:
  Volume = Second(4)
end.
```

TYPES

Basic is strictly typed language, which means that every variable and constant need to have a strictly defined type, known at the time of compilation.

The type serves:

- to determine correct memory allocation required,
- to interpret the bit patterns found in the object during subsequent accesses,
- in many type-checking situations, to ensure that illegal assignments are trapped.

mikroBasic PRO supports many standard (predefined) and user-defined data types, including signed and unsigned integers of various sizes, arrays, strings, pointers and structures.

Type Categories

Types can be divided into:

- simple types
- arrays
- strings
- pointers
- structures

SIMPLE TYPES

Simple types represent types that cannot be divided into more basic elements and are the model for representing elementary data on machine level. Basic memory unit in mikroBasic PRO for AVR has 8 bits.

Here is an overview of simple types in mikroBasic PRO for AVR:

Type	Size	Range
byte, char	8–bit	0 .. 255
short	8–bit	-127 .. 128
word	16–bit	0 .. 65535
integer	16–bit	-32768 .. 32767
longword	32–bit	0 .. 4294967295
longint	32–bit	-2147483648 .. 2147483647
float	32–bit	$\pm 1.17549435082 * 10^{-38}$ .. $\pm 6.80564774407 * 10^{38}$
bit	1–bit	0 or 1
sbit	1–bit	0 or 1

You can assign signed to unsigned or vice versa only using the explicit conversion. Refer to Types Conversions for more information.

ARRAYS

An array represents an indexed collection of elements of the same type (called the base type). Since each element has a unique index, arrays, unlike sets, can meaningfully contain the same value more than once.

Array Declaration

Array types are denoted by constructions in the following form:

```
type[ array_length]
```

Each of elements of an array is numbered from `0` through `array_length` - 1. Every element of an array is of `type` and can be accessed by specifying array name followed by element's index within brackets.

Here are a few examples of array declaration:

```
dim weekdays as byte[ 7]
dim samples  as word[ 50]

main:
  ' Now we can access elements of array variables, for example:
  samples[ 0] = 1
  if samples[ 37] = 0 then
    ' ...
```

Constant Arrays

Constant array is initialized by assigning it a comma-delimited sequence of values within parentheses. For example:

```
' Declare a constant array which holds number of days in each month:
const MONTHS as byte[ 12] = (31,28,31,30,31,30,31,31,30,31,30,31)
```

Note that indexing is zero based; in the previous example, number of days in January is `MONTHS[ 0]` and number of days in December is `MONTHS[ 11]`.

The number of assigned values must not exceed the specified length. Vice versa is possible, when the trailing "excess" elements will be assigned zeroes.

For more information on arrays of `char`, refer to Strings.

STRINGS

A string represents a sequence of characters equivalent to an array of `char`. It is declared like this:

```
string[ string_length]
```

The specifier `string_length` is a number of characters a string consists of. The string is stored internally as the given sequence of characters plus a final `null` character (zero). This appended “stamp” does not count against string’s total length.

A null string (`""`) is stored as a single `null` character.

You can assign string literals or other strings to string variables. The string on the right side of an assignment operator has to be shorter than another one, or of equal length. For example:

```
dim msg1 as string[ 20]
dim msg2 as string[ 19]

main:
  msg1 = "This is some message"
  msg2 = "Yet another message"

  msg1 = msg2  ' this is ok, but vice versa would be illegal
```

Alternately, you can handle strings element–by–element. For example:

```
dim s as string[ 5]
' ...
s = "mik"
' s[ 0]  is char literal "m"
' s[ 1]  is char literal "i"
' s[ 2]  is char literal "k"
' s[ 3]  is zero
' s[ 4]  is undefined
' s[ 5]  is undefined
```

Be careful when handling strings in this way, since overwriting the end of a string will cause an unpredictable behavior.

Note

mikroBasic PRO for AVR includes String Library which automatizes string related tasks.

POINTERS

A pointer is a data type which holds a memory address. While a variable accesses that memory address directly, a pointer can be thought of as a reference to that memory address.

To declare a pointer data type, add a carat prefix (^) before type. For example, if you are creating a pointer to an integer, you would write:

```
^integer
```

To access the data at the pointer's memory location, you add a carat after the variable name. For example, let's declare variable p which points to word, and then assign the pointed memory location value 5:

```
dim p as ^word
'...
p^ = 5
```

A pointer can be assigned to another pointer. However, note that only address, not value, is copied. Once you modify the data located at one pointer, the other pointer, when dereferenced, also yields modified data.

@ Operator

The @ operator returns the address of a variable or routine, i.e. @ constructs a pointer to its operand. The following rules are applied to @:

- If X is a variable, @X returns the address of X.
- If F is a routine (a function or procedure), @F returns F's entry point (the result is of longint).

STRUCTURES

A structure represents a heterogeneous set of elements. Each element is called a member; the declaration of a structure type specifies a name and type for each member. The syntax of a structure type declaration is

```
structure structname
  dim member1 as type1
  '...
  dim membern as typen
end structure
```

where `structname` is a valid identifier, each `type` denotes a type, and each `member` is a valid identifier. The scope of a member identifier is limited to the structure in which it occurs, so you don't have to worry about naming conflicts between member identifiers and other variables.

For example, the following declaration creates a structure type called Dot:

```
structure Dot
  dim x as float
  dim y as float
end structure
```

Each `Dot` contains two members: `x` and `y` coordinates; memory is allocated when you instantiate the structure, like this:

```
dim m, n as Dot
```

This variable declaration creates two instances of `Dot`, called `m` and `n`.

A member can be of the previously defined structure type. For example:

```
' Structure defining a circle:
structure Circle
  dim radius as float
  dim center as Dot
end structure
```

Structure Member Access

You can access the members of a structure by means of dot (.) as a direct member selector. If we had declared the variables circle1 and circle2 of the previously defined type Circle:

```
dim circle1, circle2 as Circle
```

we could access their individual members like this:

```
circle1.radius = 3.7
circle1.center.x = 0
circle1.center.y = 0
```

You can also commit assignments between complex variables, if they are of the same type:

```
circle2 = circle1  ' This will copy values of all members
```

TYPES CONVERSIONS

Conversion of variable of one type to variable of another type is typecasting. mikroBasic PRO for AVR supports both implicit and explicit conversions for built-in types.

Implicit Conversion

Compiler will provide an automatic implicit conversion in the following situations:

- statement requires an expression of particular type (according to language definition) and we use an expression of different type,
- operator requires an operand of particular type and we use an operand of different type,
- function requires a formal parameter of particular type and we pass it an object of different type,
- `result` does not match the declared function return type.

Promotion

When operands are of different types, implicit conversion promotes the less complex to the more complex type taking the following steps:

```
byte/char     →  word
short         →  integer
short         →  longint
integer       →  longint
integral      →  float
```

Higher bytes of extended unsigned operand are filled with zeroes. Higher bytes of extended signed operand are filled with bit sign (if number is negative, fill higher bytes with one, otherwise with zeroes). For example:

```
dim a as byte
dim b as word
'...
a = $FF
b = a  ' a is promoted to word, b becomes $00FF
```

Clipping

In assignments and statements that require an expression of particular type, destination will store the correct value only if it can properly represent the result of expression, i.e. if the result fits in destination range.

If expression evaluates to more complex type than expected excess data will be simply clipped (the higher bytes are lost).

```
dim i as byte
dim j as word
'...
j = $FF0F
i = j   ' i becomes $0F, higher byte $FF is lost
```

EXPLICIT CONVERSION

Explicit conversion can be executed at any point by inserting type keyword (`byte, word, short, integer, longint,` or `float`) ahead of the expression to be converted. The expression must be enclosed in parentheses. Explicit conversion can be performed only on the operand left of the assignment operator.

Special case is the conversion between signed and unsigned types. Explicit conversion between signed and unsigned data does not change binary representation of data — it merely allows copying of source to destination.

For example:

```
dim a as byte
dim b as short
'...
b = -1
a = byte(b)   ' a is 255, not 1

' This is because binary representation remains
' 11111111; it's just interpreted differently now
```

You cannot execute explicit conversion on the operand left of the assignment operator:

```
word(b) = a   ' Compiler will report an error
```

OPERATORS

Operators are tokens that trigger some computation when being applied to variables and other objects in an expression.

There are four types of operators in mikroBasic PRO for AVR:

- Arithmetic Operators
- Bitwise Operators
- Boolean Operators
- Relational Operators

OPERATORS PRECEDENCE AND ASSOCIATIVITY

There are 4 precedence categories in mikroBasic PRO for AVR. Operators in the same category have equal precedence with each other.

Each category has an associativity rule: left-to-right (⇢), or right-to-left (⇠). In the absence of parentheses, these rules resolve the grouping of expressions with operators of equal precedence.

Precedence	Operands	Operators	Associativity
4	1	@ not + -	⇠
3	2	* / div mod and << >>	⇢
2	2	+ - or xor	⇢
1	2	= <> < > <= >=	⇢

ARITHMETIC OPERATORS

Arithmetic operators are used to perform mathematical computations. They have numerical operands and return numerical results. Since the `char` operators are technically `bytes`, they can be also used as unsigned operands in arithmetic operations.

All arithmetic operators associate from left to right.

Operator	Operation	Operands	Result
`+`	addition	`byte, short, word, integer, longint, longword, float`	`byte, short, word, integer, longint, longword, float`
`-`	subtraction	`byte, short, word, integer, longint, longword, float`	`byte, short, word, integer, longint, longword, float`
`*`	multiplication	`byte, short, word, integer, longint, longword, float`	`word, integer, longint, longword, float`
`/`	division, floating-point	`byte, short, word, integer, longint, longword, float`	`float`
`div`	division, rounds down to nearest integer	`byte, short, word, integer, longint, longword`	`byte, short, word, integer, longint, longword`
`mod`	modulus, returns the remainder of integer division (cannot be used with floating points)	`byte, short, word, integer, longint, longword`	`byte, short, word, integer, longint, longword`

Division by Zero

If 0 (zero) is used explicitly as the second operand (i.e. x `div 0`), the compiler will report an error and will not generate code.
But in case of implicit division by zero: `x div y`, where y is 0 (zero), the result will be the maximum integer (i.e `255`, if the result is byte type; `65536`, if the result is `word` type, etc.).

Unary Arithmetic Operators

Operator - can be used as a prefix unary operator to change sign of a signed value. Unary prefix operator + can be used, but it doesn't affect data.

For example:

```
b = -a
```

RELATIONAL OPERATORS

Use relational operators to test equality or inequality of expressions. All relational operators return TRUE or FALSE.

Operator	Operation
=	equal
<>	not equal
>	greater than
<	less than
>=	greater than or equal
<=	less than or equal

All relational operators associate from left to right.

Relational Operators in Expressions

The equal sign (=) can also be an assignment operator, depending on context.

Precedence of arithmetic and relational operators was designated in such a way to allow complex expressions without parentheses to have expected meaning:

```
 if aa + 5 >= bb - 1.0 / cc then    ' same as: if (aa + 5) >= (bb -
(1.0 / cc)) then
   dd = My_Function()
 end if
```

BITWISE OPERATORS

Use the bitwise operators to modify the individual bits of numerical operands.

Bitwise operators associate from left to right. The only exception is the bitwise complement operator not which associates from right to left.

Bitwise Operators Overview

Operator	Operation
and	bitwise AND; compares pairs of bits and generates a 1 result if both bits are 1, otherwise it returns 0
or	bitwise (inclusive) OR; compares pairs of bits and generates a 1 result if either or both bits are 1, otherwise it returns 0
xor	bitwise exclusive OR (XOR); compares pairs of bits and generates a 1 result if the bits are complementary, otherwise it returns 0
not	bitwise complement (unary); inverts each bit
<<	bitwise shift left; moves the bits to the left, it discards the far left bit and assigns 0 to the right most bit.
>>	bitwise shift right; moves the bits to the right, discards the far right bit and if unsigned assigns 0 to the left most bit, otherwise sign extends

Logical Operations on Bit Level

and	0	1
0	0	0
1	0	1

or	0	1
0	0	1
1	1	1

xor	0	1
0	0	1
1	1	0

not	0	1
	1	0

The bitwise operators `and`, `or`, and `xor` perform logical operations on the appropriate pairs of bits of their operands. The operator `not` complements each bit of its operand. For example:

```
$1234 and $5678          ' equals $1230

' because ..

' $1234 : 0001 0010 0011 0100
' $5678 : 0101 0110 0111 1000
' ----------------------------
'   and : 0001 0010 0011 0000

' .. that is, $1230'

Similarly:

$1234 or  $5678          ' equals $567C
$1234 xor $5678          ' equals $444C
not $1234                ' equals $EDCB
```

Unsigned and Conversions

If number is converted from less complex to more complex data type, the upper bytes are filled with zeroes. If number is converted from more complex to less complex data type, the data is simply truncated (upper bytes are lost).

For example:

```
dim a as byte
dim b as word
' ...
  a = $AA
  b = $F0F0
  b = b and a
  ' a is extended with zeroes; b becomes $00A0
```

Signed and Conversions

If number is converted from less complex to more complex data type, the upper bytes are filled with ones if sign bit is 1 (number is negative); the upper bytes are filled with zeroes if sign bit is 0 (number is positive). If number is converted from more complex to less complex data type, the data is simply truncated (the upper bytes are lost).

For example:

```
dim a as byte
dim b as word
' ...
  a = -12
  b = $70FF
  b = b and a

  ' a is sign extended, upper byte is $FF;
  ' b becomes $70F4
```

Bitwise Shift Operators

The binary operators << and >> move the bits of the left operand by a number of positions specified by the right operand, to the left or right, respectively. Right operand has to be positive and less than 255.

With shift left (<<), left most bits are discarded, and “new” bits on the right are assigned zeroes. Thus, shifting unsigned operand to the left by n positions is equivalent to multiplying it by 2n if all discarded bits are zero. This is also true for signed operands if all discarded bits are equal to the sign bit.

With shift right (>>), right most bits are discarded, and the “freed” bits on the left are assigned zeroes (in case of unsigned operand) or the value of the sign bit (in case of signed operand). Shifting operand to the right by n positions is equivalent to dividing it by 2^n.

BOOLEAN OPERATORS

Although mikroBasic PRO for AVR does not support boolean type, you have Boolean operators at your disposal for building complex conditional expressions. These operators conform to standard Boolean logic and return either TRUE (all ones) or FALSE (zero):

Operator	Operation
and	logical AND
or	logical OR
xor	logical exclusive OR (XOR)
not	logical negation

Boolean operators associate from left to right. Negation operator not associates from right to left.

EXPRESSIONS

An expression is a sequence of operators, operands, and punctuators that returns a value.

The primary expressions include: literals, constants, variables and function calls. From them, using operators, more complex expressions can be created. Formally, expressions are defined recursively: subexpressions can be nested up to the limits of memory.

Expressions are evaluated according to certain conversion, grouping, associativity and precedence rules that depend on the operators used, presence of parentheses, and data types of the operands. The precedence and associativity of the operators are summarized in Operator Precedence and Associativity. The way operands and subexpressions are grouped does not necessarily specify the actual order in which they are evaluated by mikroBasic PRO for AVR.

STATEMENTS

Statements define algorithmic actions within a program. Each statement needs to be terminated with a semicolon (;). In the absence of specific jump and selection statements, statements are executed sequentially in the order of appearance in the source code.

The most simple statements are assignments, procedure calls and jump statements. These can be combined to form loops, branches and other structured statements.

Refer to:

- Assignment Statements
- Conditional Statements
- Iteration Statements (Loops)
- Jump Statements

- asm Statement

ASSIGNMENT STATEMENTS

Assignment statements have the following form:

```
variable = expression
```

The statement evaluates `expression` and assigns its value to `variable`. All rules of implicit conversion are applied. `Variable` can be any declared variable or array element, and `expression` can be any expression.

Do not confuse the assignment with relational operator = which tests for equality. mikroBasic PRO for AVR will interpret the meaning of the character = from the context.

CONDITIONAL STATEMENTS

Conditional or selection statements select from alternative courses of action by testing certain values. There are two types of selection statements:

- if
- select case

IF STATEMENT

Use the keyword if to implement a conditional statement. The syntax of the if statement has the following form:

```
if expression then
  statements
[ else
  other statements]
end if
```

When `expression` evaluates to true, `statements` execute. If `expression` is false, `other statements` execute. The `expression` must convert to a boolean type; otherwise, the condition is ill-formed. The `else` keyword with an alternate block of statements (`other statements`) is optional.

Nested if statements

Nested if statements require additional attention. A general rule is that the nested conditionals are parsed starting from the innermost conditional, with each `else` bound to the nearest available `if` on its left:

```
if expression1 then
if expression2 then
statement1
else
statement2
end if
end if
```

The compiler treats the construction in this way:

```
if expression1 then
  if expression2 then
    statement1
  else
    statement2
  end if
end if
```

In order to force the compiler to interpret our example the other way around, we have to write it explicitly:

```
if expression1 then
  if expression2 then
    statement1
  end if
else
  statement2
end if
```

SELECT CASE STATEMENT

Use the `select case` statement to pass control to a specific program branch, based on a certain condition. The `select case` statement consists of selector expression (condition) and list of possible values. The syntax of the `select case` statement is:

```
select case selector
  case value_1
    statements_1
  ...
  case value_n
    statements_n
  [case else
    default_statements]
end select
```

`selector` is an expression which should evaluate as integral value. `values` can be literals, constants or expressions and `statements` can be any statements. The `case else` clause is optional.

First, the `selector` expression (condition) is evaluated. The `select case` statement then compares it against all available `values`. If the match is found, the `statements` following the match evaluate, and the `select case` statement terminates. In case there are multiple matches, the first matching statement will be executed. If none of the `values` matches the selector, then `default_statements` in the `case else` clause (if there is one) are executed.

Here is a simple example of the select case statement:

```
select case operator
  case "*"
    res = n1 * n2
  case "/"
    res = n1 / n2
  case "+"
    res = n1 + n2
  case "-"
    res = n1 - n2
  case else
    res = 0
    cnt = cnt + 1
end select
```

Also, you can group values together for a match. Simply separate the items by commas:

```
select case reg
  case 0
    opmode = 0
  case 1,2,3,4
    opmode = 1
  case 5,6,7
    opmode = 2
end select
```

Nested Case Statements

Note that the `select case` statements can be nested – `values` are then assigned to the innermost enclosing `select case` statement.

ITERATION STATEMENTS

Iteration statements let you loop a set of statements. There are three forms of iteration statements in mikroBasic PRO for AVR:

- for
- while
- repeat

You can use the statements break and continue to control the flow of a loop statement. break terminates the statement in which it occurs, while `continue` begins executing the next iteration of the sequence.

FOR STATEMENT

The for statement implements an iterative loop and requires you to specify the number of iterations. The syntax of the for statement is:

```
for counter = initial_value to final_value [ step step_value]
  statements
next counter
```

`counter` is a variable being increased by `step_value` with each iteration of the loop. The parameter `step_value` is an optional integral value, and defaults to 1 if omitted. Before the first iteration, `counter` is set to `initial_value` and will be incremented until it reaches (or exceeds) the `final_value`. With each iteration, statements will be executed.

`initial_value` and `final_value` should be expressions compatible with `counter`; `statements` can be any statements that do not change the value of `counter`.

Note that the parameter `step_value` may be negative, allowing you to create a countdown.

Here is an example of calculating scalar product of two vectors, `a` and `b`, of length `n`, using the for statement:

```
s = 0
for i = 0 to n-1
  s = s + a[ i] * b[ i]
next i
```

Endless Loop

The for statement results in an endless loop if `final_value` equals or exceeds the range of the `counter's` type.

WHILE STATEMENT

Use the while keyword to conditionally iterate a statement. The syntax of the while statement is:

```
while expression
  statements
wend
```

`statements` are executed repeatedly as long as `expression` evaluates true. The test takes place before `statements` are executed. Thus, if `expression` evaluates false on the first pass, the loop does not execute.

Here is an example of calculating scalar product of two vectors, using the `while` statement:

```
s = 0
i = 0
while i < n
  s = s + a[ i] * b[ i]
  i = i + 1
wend
```

Probably the easiest way to create an endless loop is to use the statement:

```
while TRUE
  ' ...
wend
```

DO STATEMENT

The `do` statement executes until the condition becomes true. The syntax of the do statement is:

```
do
  statements
loop until expression
```

`statements` are executed repeatedly until `expression` evaluates true. `expression` is evaluated after each iteration, so the loop will execute `statements` at least once.

Here is an example of calculating scalar product of two vectors, using the do statement:

```
s = 0
i = 0
do
  s = s + a[ i] * b[ i]
  i = i + 1
loop until i = n
```

JUMP STATEMENTS

A jump statement, when executed, transfers control unconditionally. There are five such statements in mikroBasic PRO for AVR:

- break
- continue
- exit
- goto
- gosub

BREAK AND CONTINUE STATEMENTS

Break Statement

Sometimes, you might need to stop the loop from within its body. Use the break statement within loops to pass control to the first statement following the innermost loop (for, while, or do).

For example:

```
Lcd_Out(1, 1, "No card inserted")

' Wait for CF card to be plugged; refresh every second
while true
  if Cf_Detect() = 1 then
    break
  end if
  Delay_ms(1000)
wend

' Now we can work with CF card ...
Lcd_Out(1, 1, "Card detected    ")
```

Continue Statement

You can use the `continue` statement within loops to “skip the cycle”:

- `continue` statement in the `for` loop moves program counter to the line with keyword for
- `continue` statement in the `while` loop moves program counter to the line with loop condition (top of the loop),
- `continue` statement in the `do` loop moves program counter to the line with loop condition (bottom of the loop).

```
' continue jumps
here
for i = ...
  ...
  continue
  ...
next i
```

```
' continue jumps
here
while condition
  ...
  continue
  ...
wend
```

```
do
  ...
  continue
  ...
' continue jumps
here
loop until condition
```

EXIT STATEMENT

The `exit` statement allows you to break out of a routine (function or procedure). It passes the control to the first statement following the routine call.

Here is a simple example:

```
sub procedure Proc1()
dim error as byte
  ... ' we're doing something here
  if error = TRUE then
    exit
  end if
  ... ' some code, which won't be executed if error is true
end sub
```

Note: If breaking out of a function, return value will be the value of the local variable `result` at the moment of exit.

GOTO STATEMENT

Use the goto statement to unconditionally jump to a local label — for more information, refer to Labels. The syntax of the goto statement is:

```
goto label_name
```

This will transfer control to the location of a local label specified by `label_name`. The goto line can come before or after the label.

Label and `goto` statement must belong to the same block. Hence it is not possible to jump into or out of a procedure or function.

You can use `goto` to break out from any level of nested control structures. Never jump into a loop or other structured statement, since this can have unpredictable effects.

The use of `goto` statement is generally discouraged as practically every algorithm can be realized without it, resulting in legible structured programs. One possible application of the `goto` statement is breaking out from deeply nested control structures:

```
for i = 0 to n
  for j = 0 to m
    ...
    if disaster
      goto Error
    end if
    ...
  next j
next i
 .
 .
 .
Error: ' error handling code
```

GOSUB STATEMENT

Use the `gosub` statement to unconditionally jump to a local label — for more information, refer to Labels. The syntax of the gosub statement is:

```
gosub label_name
...
label_name:
...
return
```

This will transfer control to the location of a local label specified by `label_name`. Also, the calling point is remembered. Upon encountering the `return` statement, program execution will continue with the next statement (line) after `gosub`. The gosub line can come before or after the label.

It is not possible to jump into or out of routine by means of gosub. Never jump into a loop or other structured statement, since this can have unpredictable effects.

Note: Like with `goto`, the use of `gosub` statement is generally discouraged. mikroBasic PRO for AVR supports `gosub` only for the sake of backward compatibility. It is better to rely on functions and procedures, creating legible structured programs.

ASM STATEMENT

mikroBasic PRO for AVR allows embedding assembly in the source code by means of the `asm` statement. Note that you cannot use numerals as absolute addresses for register variables in assembly instructions. You may use symbolic names instead (listing will display these names as well as addresses).

You can group assembly instructions with the `asm` keyword:

```
asm
    block of assembly instructions
end asm
```

mikroBasic PRO comments are not allowed in embedded assembly code. Instead, you may use one-line assembly comments starting with semicolon.

If you plan to use a certain mikroBasic PRO variable in embedded assembly only, be sure to at least initialize it (assign it initial value) in mikroBasic PRO code; otherwise, the linker will issue an error. This is not applied to predefined globals such as P0.

For example, the following code will not be compiled because the linker won't be able to recognize the variable `myvar`:

```
program test

dim myvar as word

main:
  asm
    MOV #10, W0
    MOV W0, _myvar
  end asm
end.
```

Adding the following line (or similar) above the asm block would let linker know that variable is used:

```
  myvar = 20
```

DIRECTIVES

Directives are words of special significance which provide additional functionality regarding compilation and output.

The following directives are at your disposal:

- Compiler directives for conditional compilation,
- Linker directives for object distribution in memory.

COMPILER DIRECTIVES

Any line in source code with leading `#` is taken as a compiler directive. The initial # can be preceded or followed by whitespace (excluding new lines). The compiler directives are not case sensitive.

You can use conditional compilation to select particular sections of code to compile while excluding other sections. All compiler directives must be completed in the source file in which they begun.

Directives #DEFINE and #UNDEFINE

Use directive `#DEFINE` to define a conditional compiler constant (“flag”). You can use any identifier for a flag, with no limitations. No conflicts with program identifiers are possible because the flags have a separate name space. Only one flag can be set per directive.

For example:

```
#DEFINE extended_format
```

Use `#UNDEFINE` to undefine (“clear”) previously defined flag.

Directives #IFDEF, #ELSEIF and #ELSE

Conditional compilation is carried out by the `#IFDEF` directive. `#IFDEF` tests whether a flag is currently defined or not; i.e. whether the previous `#DEFINE` directive has been processed for that flag and is still in force.

The directive `#IFDEF` is terminated by the `#ENDIF` directive and can have any number of the `#ELSEIF` clauses and an optional `#ELSE` clause:

```
#IFDEF flag THEN
  block of code
[  #ELSEIF flag_1 THEN
  block of code 1
...
#ELSEIF flag_n THEN
  block of code n ]
[  #ELSE
  alternate block of code ]
#ENDIF
```

First, #IFDEF checks if flag is set by means of #DEFINE. If so, only block of code will be compiled. Otherwise, the compiler will check flags flag_1 .. flag_n and execute the appropriate block of code i. Eventually, if none of the flags is set, alternate block of code in #ELSE (if any) will be compiled.

#ENDIF ends the conditional sequence. The result of the preceding scenario is that only one section of code (possibly empty) is passed on for further processing. The processed section can contain further conditional clauses, nested to any depth; each #IFDEF must be matched with a closing #ENDIF.

Here is an example:

```
' Uncomment the appropriate flag for your application:
'#DEFINE resolution8
'#DEFINE resolution10
'#DEFINE resolution12

#IFDEF resolution8 THEN
  ... ' code specific to 8-bit resolution
#ELSEIF resolution10 THEN
  ... ' code specific to 10-bit resolution
#ELSEIF resolution12 THEN
  ... ' code specific to 12-bit resolution
#ELSE
  ... ' default code
#ENDIF
```

Predefined Flags

The compiler sets directives upon completion of project settings, so the user doesn't need to define certain flags.
Here is an example:

```
#IFDEF ATMEGA16 ' If ATmega16 MCU is selected
#IFDEF ATMEGA128 ' If ATmega128 MCU is selected
```

In some future releases of the compiler, the JTAG flag will be added also.

See also predefined project level defines.

LINKER DIRECTIVES

mikroBasic PRO for AVR uses internal algorithm to distribute objects within memory. If you need to have a variable or routine at the specific predefined address, use the linker directives `absolute` and `org`.

Note: You must specify an even address when using the linker directives.

Directive absolute

The directive `absolute` specifies the starting address in RAM for a variable. If the variable spans more than 1 word (16-bit), higher words will be stored at the consecutive locations.

The `absolute` directive is appended to the declaration of a variable:

```
dim x as word absolute 0x32
' Variable x will occupy 1 word (16 bits) at address 0x32

dim y as longint absolute 0x34
' Variable y will occupy 2 words at addresses 0x34 and 0x36
```

Be careful when using `absolute` directive, as you may overlap two variables by accident. For example:

```
dim  i as word absolute 0x42
' Variable i will occupy 1 word at address 0x42;

dim jj as longint absolute 0x40
' Variable will occupy 2 words at 0x40 and 0x42; thus,
' changing i changes jj at the same time and vice versa
```

Note: You must specify an even address when using the directive absolute.

Directive org

The directive `org` specifies the starting address of a routine in ROM. It is appended to the declaration of routine. For example:

```
sub procedure proc(dim par as word) org 0x200
' Procedure will start at the address 0x200;
...
end sub
```

Note: You must specify an even address when using the directive `org`.

CHAPTER 6

mikroBasic PRO for AVR Libraries

mikroBasic PRO for AVR provides a set of libraries which simplify the initialization and use of AVR compliant MCUs and their modules:

Use Library manager to include mikroBasic PRO for AVR Libraries in you project.

HARDWARE AVR-SPECIFIC LIBRARIES

- ADC Library
- CANSPI Library
- Compact Flash Library
- EEPROM Library
- Flash Memory Library
- Graphic Lcd Library
- Keypad Library
- Lcd Library
- Manchester Code Library
- Multi Media Card library
- OneWire Library
- Port Expander Library
- PS/2 Library
- PWM Library
- PWM 16 bit Library
- RS-485 Library
- Software I2C Library
- Software SPI Library
- Software UART Library
- Sound Library
- SPI Library
- SPI Ethernet Library
- SPI Graphic Lcd Library
- SPI Lcd Library
- SPI Lcd8 Library
- SPI T6963C Graphic Lcd Library
- T6963C Graphic Lcd Library
- TWI Library
- UART Library

Miscellaneous Libraries

- Button Library
- Conversions Library
- Math Library
- String Library
- Time Library
- Trigonometry Library

See also Built-in Routines.

LIBRARY DEPENDENCIES

Certain libraries use (depend on) function and/or variables, constants defined in other libraries.
Image below shows clear representation about these dependencies.

For example, SPI_Glcd uses Glcd_Fonts and Port_Expander library which uses SPI library.
This means that if you check SPI_Glcd library in Library manager, all libraries on which it depends will be checked too.

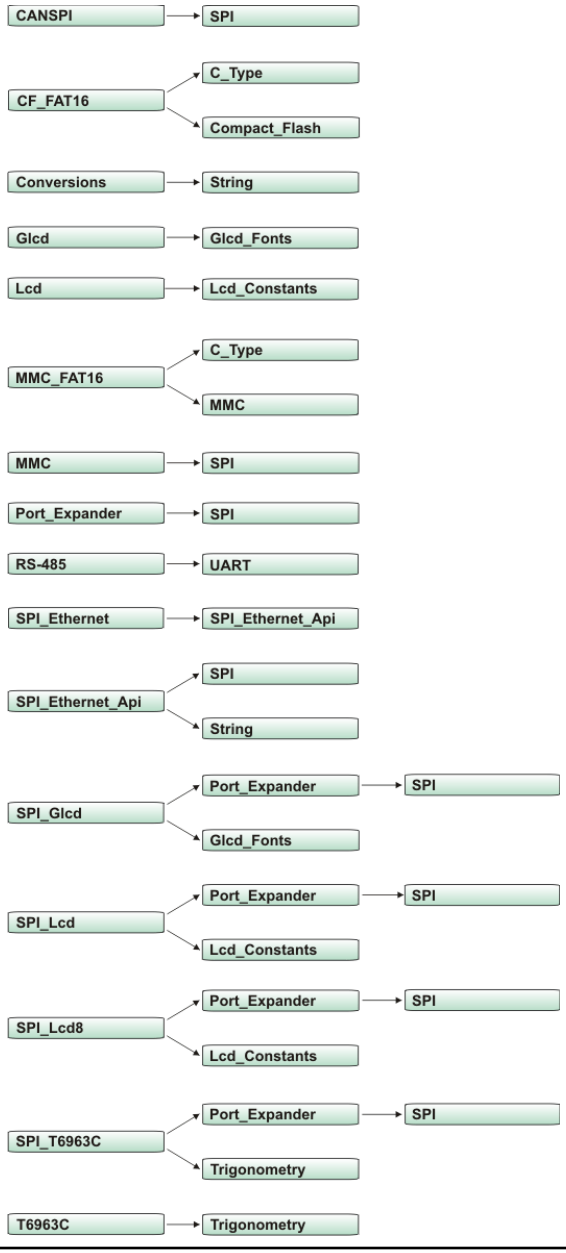

Related topics: Library manager, AVR Libraries

ADC LIBRARY

ADC (Analog to Digital Converter) module is available with a number of AVR micros. Library function `ADC_Read` is included to provide you comfortable work with the module in single-ended mode.

ADC_Read

Prototype	`sub function ADC_Read(dim channel as byte) as word`
Returns	10-bit or 12-bit (MCU dependent) unsigned value from the specified `channel`.
Description	Initializes AVR 's internal ADC module to work with XTAL frequency prescaled by 128. Clock determines the time period necessary for performing A/D conversion. Parameter `channel` represents the channel from which the analog value is to be acquired. Refer to the appropriate datasheet for channel-to-pin mapping.
Requires	Nothing.

Example	`dim tmp as word`
	`...`
	`tmp = ADC_Read(2)  ' Read analog value from channel 2`

Library Example

This example code reads analog value from channel 2 and displays it on PORTB and PORTC.

```
program ADC_on_LEDs

dim adc_rd as word

main:
  DDRB = 0xFF                 ' Set PORTB as output
  DDRC = 0xFF                 ' Set PORTC as output

  while TRUE
    temp_res = ADC_Read(2)   ' get ADC value from 2nd channel
    PORTB = adc_rd           ' display adc_rd[7..0]
    PORTC = Hi(adc_rd)       ' display adc_rd[9..8]
  wend
end.
```

HW Connection

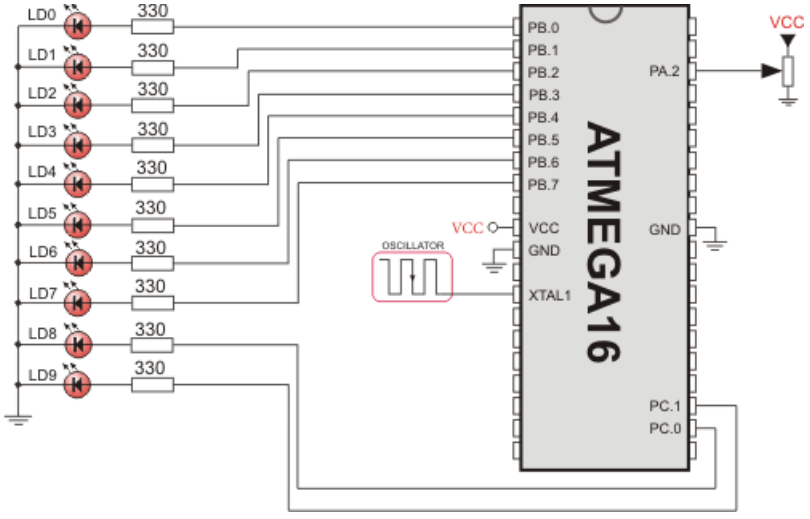

ADC HW connection

CANSPI LIBRARY

The SPI module is available with a number of the AVR compliant MCUs. The mikroBasic PRO for AVR provides a library (driver) for working with mikroElektronika's CANSPI Add-on boards (with MCP2515 or MCP2510) via SPI interface.

The CAN is a very robust protocol that has error detection and signalization, self–checking and fault confinement. Faulty CAN data and remote frames are retransmitted automatically, similar to the Ethernet.

Data transfer rates depend on distance. For example, 1 Mbit/s can be achieved at network lengths below 40m while 250 Kbit/s can be achieved at network lengths below 250m. The greater distance the lower maximum bitrate that can be achieved. The lowest bitrate defined by the standard is 200Kbit/s. Cables used are shielded twisted pairs.

CAN supports two message formats:

- Standard format, with 11 identifier bits and
- Extended format, with 29 identifier bits

Note:

- Consult the CAN standard about CAN bus termination resistance.
- An effective CANSPI communication speed depends on SPI and certainly is slower than “real” CAN.
- CANSPI module refers to mikroElektronika's CANSPI Add-on board connected to SPI module of MCU.
- Prior to calling any of this library routines, Spi_Rd_Ptr needs to be initialized with the appropriate SPI_Read routine.

External dependencies of CANSPI Library

The following variables must be defined in all projects using CANSPI Library:	Description:	Example :
`dim CanSpi_CS as sbit sfr external`	Chip Select line.	`dim CanSpi_CS as sbit at PORTB.B0`
`dim CanSpi_Rst as sbit sfr external`	Reset line.	`dim CanSpi_Rst as sbit at PORTB.B2`
`dim CanSpi_CS_Bit_Direction as sbit sfr external`	Direction of the Chip Select pin.	`dim CanSpi_CS_Bit_Direction as sbit at DDRB.B0`
`dim CanSpi_Rst_Bit_Direction as sbit sfr external`	Direction of the Reset pin.	`dim CanSpi_Rst_Bit_Direction as sbit at DDRB.B2`

Library Routines

- CANSPISetOperationMode
- CANSPIGetOperationMode
- CANSPIInitialize
- CANSPISetBaudRate
- CANSPISetMask
- CANSPISetFilter
- CANSPIread
- CANSPIWrite

The following routines are for an internal use by the library only:

- RegsToCANSPIID
- CANSPIIDToRegs

Be sure to check CANSPI constants necessary for using some of the sub functions.

CANSPISetOperationMode

Prototype	`sub procedure CANSPISetOperationMode(dim mode as byte, dim WAIT as byte)`
Returns	Nothing.
Description	Sets the CANSPI module to requested mode. Parameters : - `mode:` CANSPI module operation mode. Valid values: `CANSPI_OP_MODE` constants (see CANSPI constants). - `WAIT:` CANSPI mode switching verification request. If `WAIT = 0`, the call is non-blocking. The sub function does not verify if the CANSPI module is switched to requested mode or not. Caller must use `CANSPIGetOperationMode` to verify correct operation mode before performing mode specific operation. If `WAIT != 0`, the call is blocking – the sub function won't "return" until the requested mode is set.
Requires	The CANSPI routines are supported only by MCUs with the SPI module. MCU has to be properly connected to mikroElektronika's CANSPI Extra Board or similar hardware. See connection example at the bottom of this page.
Example	`' set the CANSPI module into configuration mode (wait inside CANSPISetOperationMode until this mode is set)` `CANSPISetOperationMode(CANSPI_MODE_CONFIG, 0xFF)`

CANSPIGetOperationMode

Prototype	`sub function CANSPIGetOperationMode() as byte`
Returns	Current operation mode.
Description	The sub function returns current operation mode of the CANSPI module. Check `CANSPI_OP_MODE` constants (see CANSPI constants) or device datasheet for operation mode codes.
Requires	The CANSPI routines are supported only by MCUs with the SPI module. MCU has to be properly connected to mikroElektronika's CANSPI Extra Board or similar hardware. See connection example at the bottom of this page.

Example	`' check whether the CANSPI module is in Normal mode and if it is do something.`
	`if (CANSPIGetOperationMode() = CANSPI_MODE_NORMAL) then`
	`  ...`
	`end if`

CANSPIInitialize

Prototype	`sub procedure CANSPIInitialize(dim SJW as byte, dim BRP as byte, dim PHSEG1 as byte, dim PHSEG2 as byte, dim PROPSEG as byte, dim CAN_CONFIG_FLAGS as byte)`
Returns	Nothing.
Description	Initializes the CANSPI module. Stand-Alone CAN controller in the CANSPI module is set to: - Disable CAN capture - Continue CAN operation in Idle mode - Do not abort pending transmissions - Fcan clock: 4*Tcy (Fosc) - Baud rate is set according to given parameters - CAN mode: Normal - Filter and mask registers IDs are set to zero - Filter and mask message frame type is set according to `CAN_CONFIG_FLAGS` value `SAM`, `SEG2PHTS`, `WAKFIL` and `DBEN` bits are set according to `CAN_CONFIG_FLAGS` value. Parameters: - `SJW` as defined in CAN controller's datasheet - `BRP` as defined in CAN controller's datasheet - `PHSEG1` as defined in CAN controller's datasheet - `PHSEG2` as defined in CAN controller's datasheet - `PROPSEG` as defined in CAN controller's datasheet - `CAN_CONFIG_FLAGS` is formed from predefined constants (see CANSPI constants)
Requires	Global variables : - `CanSpi_CS`: Chip Select line - `CanSpi_Rst`: Reset line - `CanSpi_CS_Bit_Direction`: Direction of the Chip Select pin - `CanSpi_Rst_Bit_Direction`: Direction of the Reset pin must be defined before using this function. The CANSPI routines are supported only by MCUs with the SPI module. The SPI module needs to be initialized. See the SPI1_Init and SPI1_Init_Advanced routines. MCU has to be properly connected to mikroElektronika's CANSPI Extra Board or similar hardware. See connection example at the bottom of this page.

Example

```
' CANSPI module connections
dim CanSpi_CS      as sbit at  PORTB.B0
    CanSpi_CS_Direction  as sbit at DDRB.B0
    CanSpi_Rst  as sbit at PORTB.B2
    CanSpi_Rst_Direction  as sbit at DDRB.B2
' End CANSPI module connections

...

dim Can_Init_Flags as byte
  ...
  Can_Init_Flags = CAN_CONFIG_SAMPLE_THRICE and  ' form value to
be used
                   CAN_CONFIG_PHSEG2_PRG_ON and  ' with
CANSPIInitialize
                   CAN_CONFIG_XTD_MSG        and
                   CAN_CONFIG_DBL_BUFFER_ON  and
                   CAN_CONFIG_VALID_XTD_MSG
  ...
  Spi_Rd_Ptr = @SPI1_Read     ' Pass pointer to SPI Read func-
tion of used SPI module
  SPI1_Init()                                    ' initialize
SPI module
  CANSPIInitialize(1,3,3,3,1,Can_Init_Flags)  ' initialize exter-
nal CANSPI module
```

CANSPISetBaudRate

Prototype	`sub procedure CANSPISetBaudRate(dim SJW as byte, dim BRP as byte, dim PHSEG1 as byte, dim PHSEG2 as byte, dim PROPSEG as byte, dim CAN_CONFIG_FLAGS as byte)`
Returns	Nothing.
Description	Sets the CANSPI module baud rate. Due to complexity of the CAN protocol, you can not simply force a bps value. Instead, use this sub function when the CANSPI module is in Config mode. `SAM`, `SEG2PHTS` and `WAKFIL` bits are set according to `CAN_CONFIG_FLAGS` value. Refer to datasheet for details. Parameters: - `SJW` as defined in CAN controller's datasheet - `BRP` as defined in CAN controller's datasheet - `PHSEG1` as defined in CAN controller's datasheet - `PHSEG2` as defined in CAN controller's datasheet - `PROPSEG` as defined in CAN controller's datasheet - `CAN_CONFIG_FLAGS` is formed from predefined constants (see CANSPI constants)
Requires	The CANSPI module must be in Config mode, otherwise the sub function will be ignored. See CANSPISetOperationMode. The CANSPI routines are supported only by MCUs with the SPI module. MCU has to be properly connected to mikroElektronika's CANSPI Extra Board or similar hardware. See connection example at the bottom of this page.

Example	`' set required baud rate and sampling rules`
	`dim can_config_flags as byte`
	`...`
	`CANSPISetOperationMode(CANSPI_MODE_CONFIG, 0xFF)  ' set CONFIGURATION mode (CANSPI module mast be in config mode for baud rate settings)`
	`can_config_flags = CANSPI_CONFIG_SAMPLE_THRICE and`
	`CANSPI_CONFIG_PHSEG2_PRG_ON and`
	`CANSPI_CONFIG_STD_MSG and`
	`CANSPI_CONFIG_DBL_BUFFER_ON and`
	`CANSPI_CONFIG_VALID_XTD_MSG and`
	`CANSPI_CONFIG_LINE_FILTER_OFF`
	`CANSPISetBaudRate(1, 1, 3, 3, 1, can_config_flags)`

CANSPISetMask

Prototype	`sub procedure CANSPISetMask(dim CAN_MASK as byte, dim val as longint, dim CAN_CONFIG_FLAGS as byte)`
Returns	Nothing.

Description	Configures mask for advanced filtering of messages. The parameter value is bit-adjusted to the appropriate mask registers.
	
	Parameters:
	
	- `CAN_MASK`: CANSPI module mask number. Valid values: `CANSPI_MASK` constants (see CANSPI constants)
	- `val`: mask register value
	- `CAN_CONFIG_FLAGS`: selects type of message to filter. Valid values:
	
	`CANSPI_CONFIG_ALL_VALID_MSG,`
	`CANSPI_CONFIG_MATCH_MSG_TYPE and CANSPI_CONFIG_STD_MSG,`
	`CANSPI_CONFIG_MATCH_MSG_TYPE and CANSPI_CONFIG_XTD_MSG.`
	
	(see CANSPI constants)

Requires	The CANSPI module must be in Config mode, otherwise the sub function will be ignored. See CANSPISetOperationMode. The CANSPI routines are supported only by MCUs with the SPI module. MCU has to be properly connected to mikroElektronika's CANSPI Extra Board or similar hardware. See connection example at the bottom of this page.

Example	`' set the appropriate filter mask and message type value`
	`CANSPISetOperationMode(CANSPI_MODE_CONFIG,0xFF) ' set CONFIGURATION mode (CANSPI module must be in config mode for mask settings)`
	
	`' Set all B1 mask bits to 1 (all filtered bits are relevant):`
	`' Note that -1 is just a cheaper way to write 0xFFFFFFFF.`
	`' Complement will do the trick and fill it up with ones.`
	`CANSPISetMask(CANSPI_MASK_B1, -1, CANSPI_CONFIG_MATCH_MSG_TYPE and CANSPI_CONFIG_XTD_MSG)`

CANSPISetFilter

Prototype	`sub procedure CANSPISetFilter(dim CAN_FILTER as byte, dim val as longint, dim CAN_CONFIG_FLAGS as byte)`
Returns	Nothing.

Description	Configures message filter. The parameter `value` is bit-adjusted to the appropriate filter registers.
	
	Parameters:
	
	- `CAN_FILTER`: CANSPI module filter number. Valid values: `CANSPI_FILTER` constants (see CANSPI constants)
	- `val`: filter register value
	- `CAN_CONFIG_FLAGS`: selects type of message to filter. Valid values:
	
	`CANSPI_CONFIG_ALL_VALID_MSG,`
	`CANSPI_CONFIG_MATCH_MSG_TYPE and CANSPI_CONFIG_STD_MSG,`
	`CANSPI_CONFIG_MATCH_MSG_TYPE and CANSPI_CONFIG_XTD_MSG.`
	
	(see CANSPI constants)

Requires	The CANSPI module must be in Config mode, otherwise the sub function will be ignored. See CANSPISetOperationMode. The CANSPI routines are supported only by MCUs with the SPI module. MCU has to be properly connected to mikroElektronika's CANSPI Extra Board or similar hardware. See connection example at the bottom of this page.

Example	`' set the appropriate filter value and message type`
	`CANSPISetOperationMode(CANSPI_MODE_CONFIG,0xFF)`
	`' set CONFIGURATION mode (CANSPI module must be in config mode for filter settings)`
	
	`' Set id of filter B1_F1 to 3:`
	`CANSPISetFilter(CANSPI_FILTER_B1_F1, 3, CANSPI_CONFIG_XTD_MSG)`

CANSPIRead

Prototype	`sub function CANSPIRead(dim byref id as longint, dim byref rd_data as byte[ 8] , dim data_len as byte, dim CAN_RX_MSG_FLAGS as byte) as byte`
Returns	- `0` if nothing is received - `0xFF` if one of the Receive Buffers is full (message received)
Description	If at least one full Receive Buffer is found, it will be processed in the following way: - Message ID is retrieved and stored to location provided by the `id` parameter - Message data is retrieved and stored to a buffer provided by the `rd_data` parameter - Message length is retrieved and stored to location provided by the `data_len` parameter - Message flags are retrieved and stored to location provided by the `CAN_RX_MSG_FLAGS` parameter Parameters: - `id:` message identifier storage address - `rd_data:` data buffer (an array of bytes up to 8 bytes in length) - `data_len:` data length storage address. - `CAN_RX_MSG_FLAGS:` message flags storage address
Requires	The CANSPI module must be in a mode in which receiving is possible. See CANSPISetOperationMode. The CANSPI routines are supported only by MCUs with the SPI module. MCU has to be properly connected to mikroElektronika's CANSPI Extra Board or similar hardware. See connection example at the bottom of this page.

Example	`' check the CANSPI module for received messages. If any was received do something.`
	`dim msg_rcvd, rx_flags, data_len as byte`
	`rd_data as byte[ 8]`
	`msg_id as longint`
	`...`
	`CANSPISetOperationMode(CANSPI_MODE_NORMAL,0xFF)`
	`' set NORMAL mode (CANSPI module must be in mode in which receive is possible)`
	`...`
	`rx_flags = 0 '`
	`clear message flags`
	`if (msg_rcvd = CANSPIRead(msg_id, rd_data, data_len, rx_flags)`
	`...`
	`end if`

CANSPIWrite

Prototype	`sub function CANSPIWrite(dim id as longint, dim byref wr_data as byte[ 8], dim data_len as byte, dim CAN_TX_MSG_FLAGS as byte) as byte`
Returns	- `0` if all Transmit Buffers are busy - `0xFF` if at least one Transmit Buffer is available
Description	If at least one empty Transmit Buffer is found, the sub function sends message in the queue for transmission. Parameters: - `id:` CAN message identifier. Valid values: 11 or 29 bit values, depending on message type (standard or extended) - `wr_data:` data to be sent (an array of bytes up to 8 bytes in length) - `data_len:` data length. Valid values: 1 to 8 - `CAN_RX_MSG_FLAGS:` message flags
Requires	The CANSPI module must be in mode in which transmission is possible. See CANSPISetOperationMode. The CANSPI routines are supported only by MCUs with the SPI module. MCU has to be properly connected to mikroElektronika's CANSPI Extra Board or similar hardware. See connection example at the bottom of this page.

Example	`' send message extended CAN message with the appropriate ID and data`
	`dim tx_flags as byte`
	`  rd_data as byte[ 8]`
	`  msg_id as longint`
	`...`
	`CANSPISetOperationMode(CAN_MODE_NORMAL, 0xFF)  '`
	`set NORMAL mode (CANSPI must be in mode in which transmission is possible)`
	
	`tx_flags = CANSPI_TX_PRIORITY_0 ands CANSPI_TX_XTD_FRAME`
	`' set message flags`
	`CANSPIWrite(msg_id, rd_data, 2, tx_flags)`

CANSPI Constants

There is a number of constants predefined in the CANSPI library. You need to be familiar with them in order to be able to use the library effectively. Check the example at the end of the chapter.

CANSPI_OP_MODE

The CANSPI_OP_MODE constants define CANSPI operation mode. Function CANSPISetOperationMode expects one of these as it's argument:

```
const
    CANSPI_MODE_BITS        as byte = $E0 Use this to access opmode bits
    CANSPI_MODE_NORMAL      as byte = 0
    CANSPI_MODE_SLEEP       as byte = $20
    CANSPI_MODE_LOOP        as byte = $40
    CANSPI_MODE_LISTEN      as byte = $60
    CANSPI_MODE_CONFIG      as byte = $80
```

CANSPI_CONFIG_FLAGS

The CANSPI_CONFIG_FLAGS constants define flags related to the CANSPI module configuration. The functions CANSPIInitialize, CANSPISetBaudRate, CANSPISetMask and CANSPISetFilter expect one of these (or a bitwise combination) as their argument:

```
const
    CANSPI_CONFIG_DEFAULT               as byte  = $FF    ' 11111111

    CANSPI_CONFIG_PHSEG2_PRG_BIT        as byte  = $01
    CANSPI_CONFIG_PHSEG2_PRG_ON         as byte  = $FF    ' XXXXXXX1
    CANSPI_CONFIG_PHSEG2_PRG_OFF        as byte  = $FE    ' XXXXXXX0

    CANSPI_CONFIG_LINE_FILTER_BIT       as byte = $02
    CANSPI_CONFIG_LINE_FILTER_ON        as byte = $FF    ' XXXXXX1X
    CANSPI_CONFIG_LINE_FILTER_OFF       as byte = $FD    ' XXXXXX0X

    CANSPI_CONFIG_SAMPLE_BIT            as byte = $04
    CANSPI_CONFIG_SAMPLE_ONCE           as byte = $FF    ' XXXXX1XX
    CANSPI_CONFIG_SAMPLE_THRICE         as byte = $FB    ' XXXXX0XX

    CANSPI_CONFIG_MSG_TYPE_BIT          as byte = $08
    CANSPI_CONFIG_STD_MSG               as byte = $FF    ' XXXX1XXX
    CANSPI_CONFIG_XTD_MSG               as byte = $F7    ' XXXX0XXX
```

```
    CANSPI_CONFIG_DBL_BUFFER_BIT        as byte = $10
    CANSPI_CONFIG_DBL_BUFFER_ON         as byte = $FF    ' XXX1XXXX
    CANSPI_CONFIG_DBL_BUFFER_OFF        as byte = $EF    ' XXX0XXXX

    CANSPI_CONFIG_MSG_BITS              as byte = $60
    CANSPI_CONFIG_ALL_MSG               as byte = $FF    ' X11XXXXX
    CANSPI_CONFIG_VALID_XTD_MSG         as byte = $DF    ' X10XXXXX
    CANSPI_CONFIG_VALID_STD_MSG         as byte = $BF    ' X01XXXXX
    CANSPI_CONFIG_ALL_VALID_MSG         as byte = $9F    ' X00XXXXX
```

You may use bitwise and to form config byte out of these values. For example:

```
init  = CANSPI_CONFIG_SAMPLE_THRICE     and
        CANSPI_CONFIG_PHSEG2_PRG_ON     and
        CANSPI_CONFIG_STD_MSG           and
        CANSPI_CONFIG_DBL_BUFFER_ON     and
        CANSPI_CONFIG_VALID_XTD_MSG     and
        CANSPI_CONFIG_LINE_FILTER_OFF
...
CANSPIInit(1, 1, 3, 3, 1, init)    ' initialize CANSPI
```

CANSPI_TX_MSG_FLAGS

CANSPI_TX_MSG_FLAGS are flags related to transmission of a CAN message:

```
 const
    CANSPI_TX_PRIORITY_BITS       as byte = $03
    CANSPI_TX_PRIORITY_0          as byte = $FC    ' XXXXXX00
    CANSPI_TX_PRIORITY_1          as byte = $FD    ' XXXXXX01
    CANSPI_TX_PRIORITY_2          as byte = $FE    ' XXXXXX10
    CANSPI_TX_PRIORITY_3          as byte = $FF    ' XXXXXX11

    CANSPI_TX_FRAME_BIT           as byte  = $08
    CANSPI_TX_STD_FRAME           as byte  = $FF   ' XXXXX1XX
    CANSPI_TX_XTD_FRAME           as byte  = $F7   ' XXXXX0XX

    CANSPI_TX_RTR_BIT             as byte = $40
    CANSPI_TX_NO_RTR_FRAME        as byte = $FF    ' X1XXXXXX
    CANSPI_TX_RTR_FRAME           as byte = $BF    ' X0XXXXXX
```

You may use bitwise and to adjust the appropriate flags. For example:

```
' form value to be used with CANSendMessage:
send_config  = CANSPI_TX_PRIORITY_0      and
               CANSPI_TX_XTD_FRAME       and
               CANSPI_TX_NO_RTR_FRAME
...
CANSPI1Write(id, data, 1, send_config)
```

CANSPI_RX_MSG_FLAGS

CANSPI_RX_MSG_FLAGS are flags related to reception of CAN message. If a particular bit is set then corresponding meaning is TRUE otherwise it will be FALSE.

```
const
    CANSPI_RX_FILTER_BITS        as byte = $07   ' Use this to access
filter bits
    CANSPI_RX_FILTER_1           as byte = $00
    CANSPI_RX_FILTER_2           as byte = $01
    CANSPI_RX_FILTER_3           as byte = $02
    CANSPI_RX_FILTER_4           as byte = $03
    CANSPI_RX_FILTER_5           as byte = $04
    CANSPI_RX_FILTER_6           as byte = $05

    CANSPI_RX_OVERFLOW           as byte = $08   ' Set if Overflowed
else cleared
    CANSPI_RX_INVALID_MSG        as byte = $10    ' Set if invalid
else cleared
    CANSPI_RX_XTD_FRAME          as byte = $20    ' Set if XTD mes-
sage else cleared
    CANSPI_RX_RTR_FRAME          as byte = $40    ' Set if RTR mes-
sage else cleared
    CANSPI_RX_DBL_BUFFERED       as byte = $80    ' Set if this mes-
sage was hardware double-buffered
```

You may use bitwise and to adjust the appropriate flags. For example:

```
if (MsgFlag and CANSPI_RX_OVERFLOW) <> 0 then
  ...
  ' Receiver overflow has occurred.
  ' We have lost our previous message.
end if
```

CANSPI_MASK

The CANSPI_MASK constants define mask codes. Function CANSPISetMask expects one of these as it's argument:

```
const
     CANSPI_MASK_B1 as byte = 0
     CANSPI_MASK_B2 as byte = 1
```

CANSPI_FILTER

The CANSPI_FILTER constants define filter codes. Functions CANSPISetFilter expects one of these as it's argument:

```
const
     CANSPI_FILTER_B1_F1 as byte = 0
     CANSPI_FILTER_B1_F2 as byte = 1
     CANSPI_FILTER_B2_F1 as byte = 2
     CANSPI_FILTER_B2_F2 as byte = 3
     CANSPI_FILTER_B2_F3 as byte = 4
     CANSPI_FILTER_B2_F4 as byte = 5
```

Library Example

This is a simple demonstration of CANSPI Library routines usage. First node initiates the communication with the second node by sending some data to its address. The second node responds by sending back the data incremented by 1. First node then does the same and sends incremented data back to second node, etc.

Code for the first CANSPI node:

```
program Can_Spi_1st

dim Can_Init_Flags, Can_Send_Flags, Can_Rcv_Flags as byte ' can flags
     Rx_Data_Len as byte          ' received data length in bytes
     RxTx_Data    as byte[ 8]     ' can rx/tx data buffer
     Msg_Rcvd as byte             ' reception flag
     Tx_ID, Rx_ID as longint      ' can rx and tx ID

' CANSPI module connections
dim CanSpi_CS as sbit at  PORTB.B0
     CanSpi_CS_Direction as sbit at DDRB.B0
     CanSpi_Rst as sbit at PORTB.B2
     CanSpi_Rst_Direction as sbit at DDRB.B2
' End CANSPI module connections

main:
   ADCSRA.7 = 0                   ' Set AN pins to Digital I/O
   PORTC = 0
   DDRC = 255

   Can_Init_Flags = 0             '
   Can_Send_Flags = 0             ' clear flags
   Can_Rcv_Flags  = 0             '

  Can_Send_Flags = _CANSPI_TX_PRIORITY_0 and  ' form value to be used
                   _CANSPI_TX_XTD_FRAME and   '  with CANSPIWrite
                   _CANSPI_TX_NO_RTR_FRAME

   Can_Init_Flags = _CANSPI_CONFIG_SAMPLE_THRICE and ' form value to be
used
                    _CANSPI_CONFIG_PHSEG2_PRG_ON and ' with CANSPIInit
                    _CANSPI_CONFIG_XTD_MSG and
                    _CANSPI_CONFIG_DBL_BUFFER_ON and
                    _CANSPI_CONFIG_VALID_XTD_MSG
```

```
SPI1_Init()                          ' initialize SPI1 module
  Spi_Rd_Ptr = @SPI1_Read                                          '
Pass pointer to SPI Read sub function of used SPI module
  CANSPIInitialize(1,3,3,3,1,Can_Init_Flags)                       '
Initialize external CANSPI module
  CANSPISetOperationMode(_CANSPI_MODE_CONFIG,0xFF)                 '
set CONFIGURATION mode
  CANSPISetMask(_CANSPI_MASK_B1,-1,_CANSPI_CONFIG_XTD_MSG)         '
set all mask1 bits to ones
  CANSPISetMask(_CANSPI_MASK_B2,-1,_CANSPI_CONFIG_XTD_MSG)         '
set all mask2 bits to ones
  CANSPISetFilter(_CANSPI_FILTER_B2_F4,3,_CANSPI_CONFIG_XTD_MSG)   '
set id of filter B1_F1 to 3

  CANSPISetOperationMode(_CANSPI_MODE_NORMAL,0xFF)' set NORMAL mode

  RxTx_Data[ 0]  = 9               ' set initial data to be sent

  Tx_ID = 12111                    ' set transmit ID

  CANSPIWrite(Tx_ID, RxTx_Data, 1, Can_Send_Flags)                 '
send initial message
  while TRUE                       ' endless loop
       Msg_Rcvd  =  CANSPIRead(Rx_ID  ,  RxTx_Data  ,  Rx_Data_Len,
Can_Rcv_Flags)    ' receive message
      if ((Rx_ID = 3) and Msg_Rcvd) then
' if message received check id
      PORTC = RxTx_Data[ 0]      ' id correct, output data at PORTC
      Inc(RxTx_Data[ 0] )        ' increment received data
      Delay_ms(10)
              CANSPIWrite(Tx_ID,  RxTx_Data,  1,  Can_Send_Flags)
' send incremented data back
    end if
  wend
end.
```

Code for the second CANSPI node:

```
program Can_Spi_2nd

dim Can_Init_Flags, Can_Send_Flags, Can_Rcv_Flags as byte ' can flags
    Rx_Data_Len as byte          ' received data length in bytes
    RxTx_Data    as byte[ 8]     ' CAN rx/tx data buffer
    Msg_Rcvd as byte             ' reception flag
    Tx_ID, Rx_ID as longint      ' can rx and tx ID
```

```
' CANSPI module connections
dim CanSpi_CS as sbit at PORTB.B0
    CanSpi_CS_Direction as sbit at DDRB.B0
    CanSpi_Rst as sbit at PORTB.B2
    CanSpi_Rst_Direction as sbit at DDRB.B2
' End CANSPI module connections

main:
  PORTC = 0                    ' clear PORTC
  DDRC = 255                ' set PORTC as output

  Can_Init_Flags = 0       '
  Can_Send_Flags = 0       ' clear flags
  Can_Rcv_Flags  = 0      '

  Can_Send_Flags = _CANSPI_TX_PRIORITY_0 and ' form value to be used
                   _CANSPI_TX_XTD_FRAME and '  with CANSPIWrite
                   _CANSPI_TX_NO_RTR_FRAME

  Can_Init_Flags = _CANSPI_CONFIG_SAMPLE_THRICE and      ' Form value
to be used
                    _CANSPI_CONFIG_PHSEG2_PRG_ON and             '
with CANSPIInit
                   _CANSPI_CONFIG_XTD_MSG and
                   _CANSPI_CONFIG_DBL_BUFFER_ON and
                   _CANSPI_CONFIG_VALID_XTD_MSG and
                   _CANSPI_CONFIG_LINE_FILTER_OFF

 SPI1_Init()                                                          '
initialize SPI1 module
Spi_Rd_Ptr = @SPI1_Read
' Pass pointer to SPI Read sub function of used SPI module
CANSPIInitialize(1,3,3,3,1,Can_Init_Flags)
' initialize external CANSPI module
CANSPISetOperationMode(_CANSPI_MODE_CONFIG,0xFF)
' set CONFIGURATION mode
CANSPISetMask(_CANSPI_MASK_B1,-1,_CANSPI_CONFIG_XTD_MSG)
' set all mask1 bits to ones
CANSPISetMask(_CANSPI_MASK_B2,-1,_CANSPI_CONFIG_XTD_MSG)
' set all mask2 bits to ones
CANSPISetFilter(_CANSPI_FILTER_B2_F3,12111,_CANSPI_CONFIG_XTD_MSG)
' set id of filter B1_F1 to 3
CANSPISetOperationMode(_CANSPI_MODE_NORMAL,0xFF)
' set NORMAL mode
Tx_ID = 3                                        ' set tx ID
```

```
 while TRUE                    ' endless loop
       Msg_Rcvd  =  CANSPIRead(Rx_ID  ,  RxTx_Data  ,  Rx_Data_Len,
Can_Rcv_Flags)    ' receive message
    if ((Rx_ID = 12111) and Msg_Rcvd) then
' if message received check id
      PORTC = RxTx_Data[ 0]  ' id correct, output data at PORTC
      Inc(RxTx_Data[ 0] )     ' increment received data
      CANSPIWrite(Tx_ID, RxTx_Data, 1, Can_Send_Flags)
' send incremented data back
    end if
  wend
end.
```

HW Connection

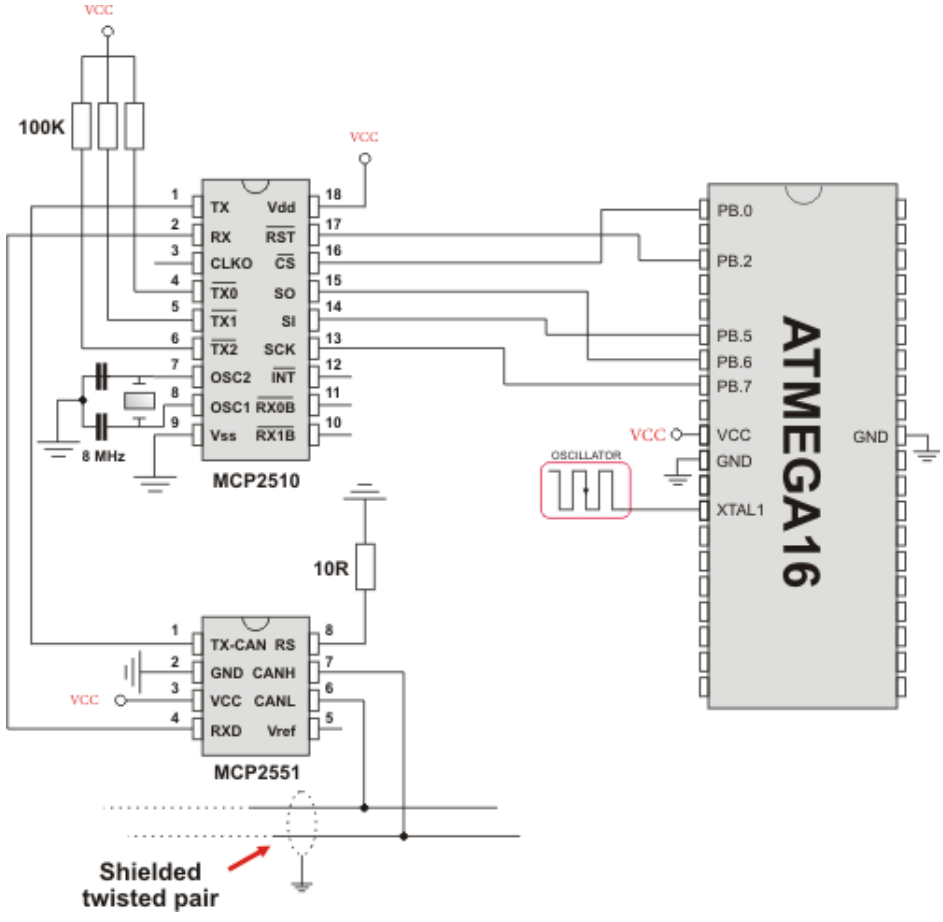

Example of interfacing CAN transceiver MCP2510 with MCU via SPI interface

COMPACT FLASH LIBRARY

The Compact Flash Library provides routines for accessing data on Compact Flash card (abbr. CF further in text). CF cards are widely used memory elements, commonly used with digital cameras. Great capacity and excellent access time of only a few microseconds make them very attractive for the microcontroller applications.

In CF card, data is divided into sectors. One sector usually comprises 512 bytes. Routines for file handling, the Cf_Fat routines, are not performed directly but successively through 512B buffer.

Note: Routines for file handling can be used only with FAT16 file system.

Note: Library functions create and read files from the root directory only.

Note: Library functions populate both FAT1 and FAT2 tables when writing to files, but the file data is being read from the FAT1 table only; i.e. there is no recovery if the FAT1 table gets corrupted.

Note: If MMC/SD card has Master Boot Record (MBR), the library will work with the first available primary (logical) partition that has non-zero size. If MMC/SD card has Volume Boot Record (i.e. there is only one logical partition and no MBRs), the library works with entire card as a single partition. For more information on MBR, physical and logical drives, primary/secondary partitions and partition tables, please consult other resources, e.g. Wikipedia and similar.

Note: Before writing operation, make sure not to overwrite boot or FAT sector as it could make your card on PC or digital camera unreadable. Drive mapping tools, such as Winhex, can be of great assistance.

External dependencies of Compact Flash Library

The following variables must be defined in all projects using Compact Flash Library:	Description:	Example :
`dim CF_Data_Port as byte sfr external`	Compact Flash Data Port.	`dim CF_Data_Port as byte at PORTD`
`dim CF_Data_Port_Direction as byte sfr external`	Direction of the Compact Flash Data Port.	`dim CF_Data_Port_Direction as byte at DDRD`
`dim CF_RDY as sbit sfr external`	Ready signal line.	`dim CF_RDY as sbit at PINB.B7`
`dim CF_WE as sbit sfr external`	Write Enable signal line.	`dim CF_WE as sbit at PORTB.B6`
`dim CF_OE as sbit sfr external`	Output Enable signal line.	`dim CF_OE as sbit at PORTB.B5`
`dim CF_CD1 as sbit sfr external`	Chip Detect signal line.	`dim CF_CD1 as sbit at PINB.B4`
`dim CF_CE1 as sbit sfr external`	Chip Enable signal line.	`dim CF_CE1 as sbit at PORTB.B3`
`dim CF_A2 as sbit sfr external`	Address pin 2.	`dim CF_A2 as sbit at PORTB.B2`
`dim CF_A1 as sbit sfr external`	Address pin 1.	`dim CF_A1 as sbit at PORTB.B1`
`dim CF_A0 as sbit sfr external`	Address pin 0.	`dim CF_A0 as sbit at PORTB.B0`
`dim CF_RDY_direction as sbit sfr external`	Direction of the Ready pin.	`dim CF_RDY_direction as sbit at DDRB.B7`
`dim CF_WE_direction as sbit sfr external`	Direction of the Write Enable pin.	`dim CF_WE_direction as sbit at DDRB.B6`
`dim CF_OE_direction as sbit sfr external`	Direction of the Output Enable pin.	`dim CF_OE_direction as sbit at DDRB.B5`
`dim CF_CD1_direction as sbit sfr external`	Direction of the Chip Detect pin.	`dim CF_CD1_direction as sbit at DDRB.B4`
`dim CF_CE1_direction as sbit sfr external`	Direction of the Chip Enable pin.	`dim CF_CE1_direction as sbit at DDRB.B3`
`dim CF_A2_direction as sbit sfr external`	Direction of the Address 2 pin.	`dim CF_A2_direction as sbit at DDRB.B2`
`dim CF_A1_direction as sbit sfr external`	Direction of the Address 1 pin.	`dim CF_A1_direction as sbit at DDRB.B1`
`dim CF_A0_direction as sbit sfr external`	Direction of the Address 0 pin.	`dim CF_A0_direction as sbit at DDRB.B0`

Library Routines

- Cf_Init
- Cf_Detect
- Cf_Enable
- Cf_Disable
- Cf_Read_Init
- Cf_Read_Byte
- Cf_Write_Init
- Cf_Write_Byte
- Cf_Read_Sector
- Cf_Write_Sector

Routines for file handling:

- Cf_Fat_Init
- Cf_Fat_QuickFormat
- Cf_Fat_Assign
- Cf_Fat_Reset
- Cf_Fat_Read
- Cf_Fat_Rewrite
- Cf_Fat_Append
- Cf_Fat_Delete
- Cf_Fat_Write
- Cf_Fat_Set_File_Date
- Cf_Fat_Get_File_Date
- Cf_Fat_Get_File_Size
- Cf_Fat_Get_Swap_File

Cf_Init

Prototype	`sub procedure Cf_Init()`
Returns	Nothing.
Description	Initializes ports appropriately for communication with CF card.
Requires	Global variables : - `CF_Data_Port` : Compact Flash data port - `CF_RDY` : Ready signal line - `CF_WE` : Write enable signal line - `CF_OE` : Output enable signal line - `CF_CD1` : Chip detect signal line - `CF_CE1` : Enable signal line - `CF_A2` : Address pin 2 - `CF_A1` : Address pin 1 - `CF_A0` : Address pin 0 - `CF_Data_Port_direction` : Direction of the Compact Flash data direction port - `CF_RDY_direction` : Direction of the Ready pin - `CF_WE_direction` : Direction of the Write enable pin - `CF_OE_direction` : Direction of the Output enable pin - `CF_CD1_direction` : Direction of the Chip detect pin - `CF_CE1_direction` : Direction of the Chip enable pin - `CF_A2_direction` : Direction of the Address 2 pin - `CF_A1_direction` : Direction of the Address 1 pin - `CF_A0_direction` : Direction of the Address 0 pin must be defined before using this function.
Example	```' set compact flash pinout dim CF_Data_Port as byte at PORTD dim Cf_Data_Port_Direction as byte at DDRD dim CF_RDY as sbit at PINB.B7 dim CF_WE as sbit at PORTB.B6 dim CF_OE as sbit at PORTB.B5 dim CF_CD1 as sbit at PINB.B4 dim CF_CE1 as sbit at PORTB.B3 dim CF_A2 as sbit at PORTB.B2 dim CF_A1 as sbit at PORTB.B1 dim CF_A0 as sbit at PORTB.B0 dim CF_RDY_direction as sbit at DDRB.B7 dim CF_WE_direction as sbit at DDRB.B6 dim CF_OE_direction as sbit at DDRB.B5 dim CF_CD1_direction as sbit at DDRB.B4 dim CF_CE1_direction as sbit at DDRB.B3 dim CF_A2_direction as sbit at DDRB.B2 dim CF_A1_direction as sbit at DDRB.B1 dim CF_A0_direction as sbit at DDRB.B0 ' end of cf pinout 'Init CF Cf_Init()```

Cf_Detect

Prototype	`sub function CF_Detect() as byte`
Returns	- `1` - if CF card was detected - `0` - otherwise
Description	Checks for presence of CF card by reading the `chip detect` pin.
Requires	The corresponding MCU ports must be appropriately initialized for CF card. See Cf_Init.

Example	`' Wait until CF card is inserted:`
	`while (Cf_Detect() = 0)`
	`  nop`
	`wend`

Cf_Enable

Prototype	`sub procedure Cf_Enable()`
Returns	Nothing.
Description	Enables the device. Routine needs to be called only if you have disabled the device by means of the Cf_Disable routine. These two routines in conjunction allow you to free/occupy data line when working with multiple devices.
Requires	The corresponding MCU ports must be appropriately initialized for CF card. See Cf_Init.
Example	`' enable compact flash` `Cf_Enable()`

Cf_Disable

Prototype	`sub procedure Cf_Disable()`
Returns	Nothing.
Description	Routine disables the device and frees the data lines for other devices. To enable the device again, call Cf_Enable. These two routines in conjunction allow you to free/occupy data line when working with multiple devices.
Requires	The corresponding MCU ports must be appropriately initialized for CF card. See Cf_Init.
Example	`' disable compact flash` `Cf_Disable()`

Cf_Read_Init

Prototype	`sub procedure Cf_Read_Init(dim address as longword, dim sector_count as byte)`
Returns	Nothing.
Description	Initializes CF card for reading. Parameters : - `address`: the first sector to be prepared for reading operation. - `sector_count`: number of sectors to be prepared for reading operation.
Requires	The corresponding MCU ports must be appropriately initialized for CF card. See Cf_Init.
Example	`' initialize compact flash for reading from sector 590` `Cf_Read_Init(590, 1)`

Cf_Read_Byte

Prototype	`sub function CF_Read_Byte() as byte`
Returns	Returns a byte read from Compact Flash sector buffer. **Note:** Higher byte of the unsigned return value is cleared.
Description	Reads one byte from Compact Flash sector buffer location currently pointed to by internal read pointers. These pointers will be autoicremented upon reading.
Requires	The corresponding MCU ports must be appropriately initialized for CF card. See Cf_Init. CF card must be initialized for reading operation. See Cf_Read_Init.

Example	`' Read a byte from compact flash:`
	`dim data as byte`
	`...`
	`data = Cf_Read_Byte()`

Cf_Write_Init

Prototype	`sub procedure Cf_Write_Init(dim address as longword, dim sectcnt as byte)`
Returns	Nothing.
Description	Initializes CF card for writing. Parameters : - `address:` the first sector to be prepared for writing operation. - `sectcnt:` number of sectors to be prepared for writing operation.
Requires	The corresponding MCU ports must be appropriately initialized for CF card. See Cf_Init.
Example	`' initialize compact flash for writing to sector 590` `Cf_Write_Init(590, 1)`

Cf_Write_Byte

Prototype	`sub procedure Cf_Write_Byte(dim data_ as byte)`
Returns	Nothing.
Description	Writes a byte to Compact Flash sector buffer location currently pointed to by writing pointers. These pointers will be autoicremented upon reading. When sector buffer is full, its content will be transfered to appropriate flash memory sector. Parameters : - `data_:` byte to be written.
Requires	The corresponding MCU ports must be appropriately initialized for CF card. See Cf_Init. CF card must be initialized for writing operation. See Cf_Write_Init.

Example	`dim data_ as byte`
	`...`
	`data = 0xAA`
	`Cf_Write_Byte(data)`

Cf_Read_Sector

Prototype	`sub procedure Cf_Read_Sector(dim sector_number as longword, dim byref buffer as byte[ 512] )`
Returns	Nothing.
Description	Reads one sector (512 bytes). Read data is stored into buffer provided by the buffer parameter. Parameters : - `sector_number:` sector to be read. - `buffer:` data buffer of at least 512 bytes in length.
Requires	The corresponding MCU ports must be appropriately initialized for CF card. See Cf_Init.

Example	`' read sector 22`
	`dim data as array[ 512] of byte`
	`...`
	`Cf_Read_Sector(22, data)`

Cf_Write_Sector

Prototype	`sub procedure Cf_Write_Sector(dim sector_number as longword, dim byref buffer as byte[ 512] )`
Returns	Nothing.
Description	Writes 512 bytes of data provided by the buffer parameter to one CF sector. Parameters : - `sector_number:` sector to be written to. - `buffer:` data buffer of 512 bytes in length.
Requires	The corresponding MCU ports must be appropriately initialized for CF card. See Cf_Init.

Example	`' write to sector 22`
	`dim data as array[ 512] of byte`
	`...`
	`Cf_Write_Sector(22, data)`

Cf_Fat_Init

Prototype	`sub function Cf_Fat_Init() as byte`
Returns	- `0` - if CF card was detected and successfully initialized - `1` - if FAT16 boot sector was not found - `255` - if card was not detected
Description	Initializes CF card, reads CF FAT16 boot sector and extracts data needed by the library.
Requires	Nothing.

Example	`init the FAT library`
	`if (Cf_Fat_Init() = 0) then`
	`  ...`
	`end if`

Cf_Fat_QuickFormat

Prototype	`sub function Cf_Fat_QuickFormat(dim byref cf_fat_label as string[11]) as byte`
Returns	- `0` - if CF card was detected, successfully formated and initialized - `1` - if FAT16 format was unseccessful - `255` - if card was not detected
Description	Formats to FAT16 and initializes CF card. Parameters : - `cf_fat_label:` volume label (11 characters in length). If less than 11 characters are provided, the label will be padded with spaces. If an empty string is passed, the volume will not be labeled. **Note:** This routine can be used instead or in conjunction with the Cf_Fat_Init routine. **Note:** If CF card already contains a valid boot sector, it will remain unchanged (except volume label field) and only FAT and ROOT tables will be erased. Also, the new volume label will be set.
Requires	Nothing.

Example	`'--- format and initialize the FAT library`
	`if ( Cf_Fat_QuickFormat('mikroE') = 0) then`
	`  ...`
	`end if`

Cf_Fat_Assign

Prototype	`sub function Cf_Fat_Assign(dim byref filename as char[12], dim file_cre_attr as byte) as byte`
Returns	- `0` if file does not exist and no new file is created. - `1` if file already exists or file does not exist but a new file is created.
Description	Assigns file for file operations (read, write, delete...). All subsequent file operations will be applied to the assigned file. Parameters : - `filename:` name of the file that should be assigned for file operations. The file name should be in DOS 8.3 (file_name.extension) format. The file name and extension will be automatically padded with spaces by the library if they have less than length required (i.e. "mikro.tx" -> "mikro .tx "), so the user does not have to take care of that. The file name and extension are case insensitive. The library will convert them to the proper case automatically, so the user does not have to take care of that. Also, in order to keep backward compatibility with the first version of this library, file names can be entered as UPPERCASE string of 11 bytes in length with no dot character between the file name and extension (i.e. "MIKROELETXT" -> MIKROELE.TXT). In this case the last 3 characters of the string are considered to be file extension. - `file_cre_attr:` file creation and attributs flags. Each bit corresponds to the appropriate file attribut:

Bit	Mask	Description
0	0x01	Read Only
1	0x02	Hidden
2	0x04	System
3	0x08	Volume Label
4	0x10	Subdirectory
5	0x20	Archive
6	0x40	Device (internal use only, never found on disk)
7	0x80	File creation flag. If the file does not exist and this flag is set, a new file with specified name will be created.

Note: Long File Names (LFN) are not supported.

Requires	CF card and CF library must be initialized for file operations. See Cf_Fat_Init.
Example	`' create file with archive attribut if it does not already exist` `Cf_Fat_Assign('MIKRO007.TXT',0xA0)`

Cf_Fat_Reset

Prototype	`sub procedure Cf_Fat_Reset(dim byref size as longword)`
Returns	Nothing.
Description	Opens currently assigned file for reading. Parameters : - `size:` buffer to store file size to. After file has been open for reading its size is returned through this parameter.
Requires	CF card and CF library must be initialized for file operations. See Cf_Fat_Init. File must be previously assigned. See Cf_Fat_Assign.

Example	`dim size as longword`
	`...`
	`Cf_Fat_Reset(size)`

Cf_Fat_Read

Prototype	`sub procedure Cf_Fat_Read(dim byref bdata as byte)`
Returns	Nothing.
Description	Reads a byte from currently assigned file opened for reading. Upon function execution file pointers will be set to the next character in the file. Parameters : - `bdata:` buffer to store read byte to. Upon this function execution read byte is returned through this parameter.
Requires	CF card and CF library must be initialized for file operations. See Cf_Fat_Init. File must be previously assigned. See Cf_Fat_Assign. File must be open for reading. See Cf_Fat_Reset.

Example	`dim character as byte`
	`...`
	`Cf_Fat_Read(character)`

Cf_Fat_Rewrite

Prototype	`sub procedure Cf_Fat_Rewrite()`
Returns	Nothing.
Description	Opens currently assigned file for writing. If the file is not empty its content will be erased.
Requires	CF card and CF library must be initialized for file operations. See Cf_Fat_Init. The file must be previously assigned. See Cf_Fat_Assign.
Example	`' open file for writing` `Cf_Fat_Rewrite()`

Cf_Fat_Append

Prototype	`sub procedure Cf_Fat_Append()`
Returns	Nothing.
Description	Opens currently assigned file for appending. Upon this function execution file pointers will be positioned after the last byte in the file, so any subsequent file writing operation will start from there.
Requires	CF card and CF library must be initialized for file operations. See Cf_Fat_Init. File must be previously assigned. See Cf_Fat_Assign.
Example	`' open file for appending` `Cf_Fat_Append()`

Cf_Fat_Delete

Prototype	`sub procedure Cf_Fat_Delete()`
Returns	Nothing.
Description	Deletes currently assigned file from CF card.
Requires	CF card and CF library must be initialized for file operations. See Cf_Fat_Init. File must be previously assigned. See Cf_Fat_Assign.
Example	`' delete current file` `Cf_Fat_Delete()`

Cf_Fat_Write

Prototype	`sub procedure Cf_Fat_Write(dim byref fdata as byte[ 512], dim data_len as word)`
Returns	Nothing.
Description	Writes requested number of bytes to currently assigned file opened for writing. Parameters : - `fdata:` data to be written. - `data_len:` number of bytes to be written.
Requires	CF card and CF library must be initialized for file operations. See Cf_Fat_Init. File must be previously assigned. See Cf_Fat_Assign. File must be open for writing. See Cf_Fat_Rewrite or Cf_Fat_Append.

Example	`dim file_contents as array[ 42] of byte`
	`...`
	`Cf_Fat_Write(file_contents, 42) ' write data to the assigned file`

Cf_Fat_Set_File_Date

Prototype	`sub procedure Cf_Fat_Set_File_Date(dim year as word, dim month as byte, dim day as byte, dim hours as byte, dim mins as byte, dim seconds as byte)`
Returns	Nothing.
Description	Sets the date/time stamp. Any subsequent file writing operation will write this stamp to currently assigned file's time/date attributs. Parameters : - `year:` year attribute. Valid values: 1980-2107 - `month:` month attribute. Valid values: 1-12 - `day:` day attribute. Valid values: 1-31 - `hours:` hours attribute. Valid values: 0-23 - `mins:` minutes attribute. Valid values: 0-59 - `seconds:` seconds attribute. Valid values: 0-59
Requires	CF card and CF library must be initialized for file operations. See Cf_Fat_Init. File must be previously assigned. See Cf_Fat_Assign. File must be open for writing. See Cf_Fat_Rewrite or Cf_Fat_Append.
Example	`Cf_Fat_Set_File_Date(2005,9,30,17,41,0)`

Cf_Fat_Get_File_Date

Prototype	`sub procedure Cf_Fat_Get_File_Date(dim byref year as word, dim byref month as byte, dim byref day as byte, dim byref hours as byte, dim byref mins as byte)`
Returns	Nothing.
Description	Reads time/date attributes of currently assigned file. Parameters : - `year:` buffer to store year attribute to. Upon function execution year attribute is returned through this parameter. - `month:` buffer to store month attribute to. Upon function execution month attribute is returned through this parameter. - `day:` buffer to store day attribute to. Upon function execution day attribute is returned through this parameter. - `hours:` buffer to store hours attribute to. Upon function execution hours attribute is returned through this parameter. - `mins:` buffer to store minutes attribute to. Upon function execution minutes attribute is returned through this parameter.
Requires	CF card and CF library must be initialized for file operations. See Cf_Fat_Init. File must be previously assigned. See Cf_Fat_Assign.

Example	`dim year as word`
	`  month, day, hours, mins as byte`
	`...`
	`Cf_Fat_Get_File_Date(year, month, day, hours, mins)`

Cf_Fat_Get_File_Size

Prototype	`sub function Cf_Fat_Get_File_Size() as longword`
Returns	Size of the currently assigned file in bytes.
Description	This function reads size of currently assigned file in bytes.
Requires	CF card and CF library must be initialized for file operations. See Cf_Fat_Init. File must be previously assigned. See Cf_Fat_Assign.

Example	`dim my_file_size as longword`
	`...`
	`my_file_size = Cf_Fat_Get_File_Size()`

Cf_Fat_Get_Swap_File

Prototype	`sub function Cf_Fat_Get_Swap_File(dim sectors_cnt as longint, dim byref filename as string[11], dim file_attr as byte) as longword`
Returns	- Number of the start sector for the newly created swap file, if there was enough free space on CF card to create file of required size. - `0` - otherwise.
Description	This function is used to create a swap file of predefined name and size on the CF media. If a file with specified name already exists on the media, search for consecutive sectors will ignore sectors occupied by this file. Therefore, it is recommended to erase such file if it exists before calling this function. If it is not erased and there is still enough space for a new swap file, this function will delete it after allocating new memory space for a new swap file. The purpose of the swap file is to make reading and writing to CF media as fast as possible, by using the Cf_Read_Sector() and Cf_Write_Sector() functions directly, without potentially damaging the FAT system. The swap file can be considered as a "window" on the media where the user can freely write/read data. Its main purpose in the mikroBasic's library is to be used for fast data acquisition; when the time-critical acquisition has finished, the data can be re-written into a "normal" file, and formatted in the most suitable way. Parameters: - `sectors_cnt:` number of consecutive sectors that user wants the swap file to have. - `filename:` name of the file that should be assigned for file operations. The file name should be in DOS 8.3 (file_name.extension) format. The file name and extension will be automatically padded with spaces by the library if they have less than length required (i.e. "mikro.tx" -> "mikro .tx "), so the user does not have to take care of that. The file name and extension are case insensitive. The library will convert them to the proper case automatically, so the user does not have to take care of that. Also, in order to keep backward compatibility with the first version of this library, file names can be entered as UPPERCASE string of 11 bytes in length with no dot character between the file name and extension (i.e. "MIKROELETXT" -> MIKROELE.TXT). In this case the last 3 characters of the string are considered to be file extension. - `file_attr:` file creation and attributs flags. Each bit corresponds to the appropriate file attribut:

Description

Bit	Mask	Description
0	0x01	Read Only
1	0x02	Hidden
2	0x04	System
3	0x08	Volume Label
4	0x10	Subdirectory
5	0x20	Archive
6	0x40	Device (internal use only, never found on disk)
7	0x80	Not used

Note: Long File Names (LFN) are not supported.

Requires

CF card and CF library must be initialized for file operations. See Cf_Fat_Init.

Example

```
program
'-------------- Try to create a swap file with archive atribute,
whose size will be at least 1000 sectors.
'                 If it succeeds, it sends the No. of start sec-
tor over USART
dim size as longword
...
main:
  ...
  size = Cf_Fat_Get_Swap_File(1000, "mikroE.txt", 0x20)
  if size then
    UART1_Write(0xAA)
    UART1_Write(Lo(size))
    UART1_Write(Hi(size))
    UART1_Write(Higher(size))
    UART1_Write(Highest(size))
    UART1_Write(0xAA)
  end if
end.
```

Library Example

The following example is a simple demonstration of CF(Compact Flash) Library which shows how to use CF card data accessing routines.

```
program CF_Fat16_Test

dim
 ' set compact flash pinout
 Cf_Data_Port as byte at PORTD
 Cf_Data_Port_Direction as byte at DDRD

 CF_RDY as sbit at PINB.B7
 CF_WE  as sbit at PORTB.B6
 CF_OE  as sbit at PORTB.B5
 CF_CD1 as sbit at PINB.B4
 CF_CE1 as sbit at PORTB.B3
 CF_A2  as sbit at PORTB.B2
 CF_A1  as sbit at PORTB.B1
 CF_A0  as sbit at PORTB.B0

 CF_RDY_direction as sbit at DDRB.B7
 CF_WE_direction  as sbit at DDRB.B6
 CF_OE_direction  as sbit at DDRB.B5
 CF_CD1_direction as sbit at DDRB.B4
 CF_CE1_direction as sbit at DDRB.B3
 CF_A2_direction  as sbit at DDRB.B2
 CF_A1_direction  as sbit at DDRB.B1
 CF_A0_direction  as sbit at DDRB.B0
 ' end of cf pinout


 FAT_TXT as string[20]
 file_contents as string[50]

 filename as string[14]    ' File names

 character as byte
 loop_, loop2 as byte
 size as longint

 Buffer as byte[512]

'-------------- Writes string to USART
sub procedure Write_Str(dim byref ostr as byte[2] )
dim
  i as byte
```

```
 i = 0
  while ostr[ i] <> 0
    UART1_Write(ostr[ i] )
    Inc(i)
  wend
  UART1_Write($0A)
end sub'~

'-------------- Creates new file and writes some data to it
sub procedure Create_New_File

  filename[ 7] = "A"
  Cf_Fat_Assign(filename, 0xA0)        ' Will not find file and then
create file
  Cf_Fat_Rewrite()                    ' To clear file and start with
new data
  for loop_=1 to 90                    '  We want 5 files on the MMC
card
    PORTC = loop_
    file_contents[ 0] = loop_ div 10 + 48
    file_contents[ 1] = loop_ mod 10 + 48
   Cf_Fat_Write(file_contents, 38) ' write data to the assigned file
    UART1_Write(".")
  next loop_
end sub'~

'-------------- Creates many new files and writes data to them
sub procedure Create_Multiple_Files

  for loop2 = "B" to "Z"
    UART1_Write(loop2) ' this line can slow down the performance
    filename[ 7] = loop2                ' set filename
   Cf_Fat_Assign(filename, 0xA0)        ' find existing file or cre-
ate a new one
    Cf_Fat_Rewrite                       ' To clear file and start
with new data
    for loop_ = 1 to 44
      file_contents[ 0] = loop_ div 10 + 48
      file_contents[ 1] = loop_ mod 10 + 48
       Cf_Fat_Write(file_contents, 38) ' write data to the assigned
file
    next loop_
  next loop2
end sub'~


'-------------- Opens an existing file and rewrites it
sub procedure Open_File_Rewrite
```

```
 filename[ 7]  = "C"                ' Set filename for single-file tests
  Cf_Fat_Assign(filename, 0)
  Cf_Fat_Rewrite
  for loop_ = 1 to 55
    file_contents[ 0]  = byte(loop_ div 10 + 48)
    file_contents[ 1]  = byte(loop_ mod 10 + 48)
   Cf_Fat_Write(file_contents, 38) ' write data to the assigned file
  next loop_
end sub'~

'-------------- Opens an existing file and appends data to it
'                (and alters the date/time stamp)
sub procedure Open_File_Append
   filename[ 7]  = "B"
   Cf_Fat_Assign(filename, 0)
   Cf_Fat_Set_File_Date(2005,6,21,10,35,0)
   Cf_Fat_Append
   file_contents = " for mikroElektronika 2005"      ' Prepare file
for append
   file_contents[ 26]  = 10                           ' LF
   Cf_Fat_Write(file_contents, 27)                     ' Write data
to assigned file
end sub'~

'-------------- Opens an existing file, reads data from it and puts
it to USART
sub procedure Open_File_Read
  filename[ 7]  = "B"
  Cf_Fat_Assign(filename, 0)
  Cf_Fat_Reset(size)            ' To read file, sub procedure returns
size of file
  while size > 0
    Cf_Fat_Read(character)
    UART1_Write(character)          ' Write data to USART
    Dec(size)
  wend
end sub'~

'-------------- Deletes a file. If file doesn"t exist, it will first
be created
'                and then deleted.
sub procedure Delete_File
  filename[ 7]  = "F"
  Cf_Fat_Assign(filename, 0)
  Cf_Fat_Delete
end sub'~

'-------------- Tests whether file exists, and if so sends its cre-
ation date
'                and file size via USART
```

```
sub procedure Test_File_Exist(dim fname as byte)
dim
  fsize as longint
  year as word
  month_, day, hour_, minute_ as byte
  outstr as byte[ 12]

  filename[ 7]  = "B"         'uncomment this line to search for file
that DOES exists
'  filename[ 7]  = "F"         'uncomment this line to search for file
that DOES NOT exist
  if Cf_Fat_Assign(filename, 0) <> 0 then
    '--- file has been found - get its date
    Cf_Fat_Get_File_Date(year,month_,day,hour_,minute_)
    WordToStr(year, outstr)
    Write_Str(outstr)
    ByteToStr(month_, outstr)
    Write_Str(outstr)
    WordToStr(day, outstr)
    Write_Str(outstr)
    WordToStr(hour_, outstr)
    Write_Str(outstr)
    WordToStr(minute_, outstr)
    Write_Str(outstr)
    '--- get file size
    fsize = Cf_Fat_Get_File_Size
    LongIntToStr(fsize, outstr)
    Write_Str(outstr)
  else
    '--- file was not found - signal it
    UART1_Write(0x55)
    Delay_ms(1000)
    UART1_Write(0x55)
  end if
end sub'~


'-------------- Tries to create a swap file, whose size will be at
least 100
'                sectors (see Help for details)
sub procedure M_Create_Swap_File
  dim i as word

    for i=0 to 511
      Buffer[ i]  = i
    next i
     size = Cf_Fat_Get_Swap_File(5000, "mikroE.txt", 0x20)    ' see
help on this sub function for details

    if (size <> 0) then
```

```
LongIntToStr(size, fat_txt)
        Write_Str(fat_txt)

        for i=0 to 4999
            Cf_Write_Sector(size, Buffer)
            size = size+1
            UART1_Write(".")
        next i
    end if
end sub'~


'-------------- Main. Uncomment the sub function(s) to test the
desired operation(s)
main:
     FAT_TXT = "FAT16 not found"
     file_contents = "XX CF FAT16 library by Anton Rieckert"
     file_contents[ 37]  = 10           ' newline
     filename = "MIKRO00xTXT"

     ' we will use PORTC to signal test end
     DDRC  = 0xFF
     PORTC = 0

     UART1_Init(19200)                  ' Set up USART for file read-
ing
     delay_ms(100)
     UART1_Write_Text(":Start:")

     ' --- Init the FAT library
     ' --- use Cf_Fat_QuickFormat instead of init routine if a for-
mat is needed
     if Cf_Fat_Init() = 0 then

         '--- test sub functions
         '----- test group #1
         Create_New_File()
         Create_Multiple_Files()
         '----- test group #2
         Open_File_Rewrite()
         Open_File_Append()
         Delete_File
         '----- test group #3
         Open_File_Read()
         Test_File_Exist("F")
         M_Create_Swap_File()
         '--- Test termination
         UART1_Write(0xAA)
     else
         UART1_Write_Text(FAT_TXT)
     end if
     '--- signal end-of-test
     UART1_Write_Text(":End:")
end.'~!
```

HW Connection

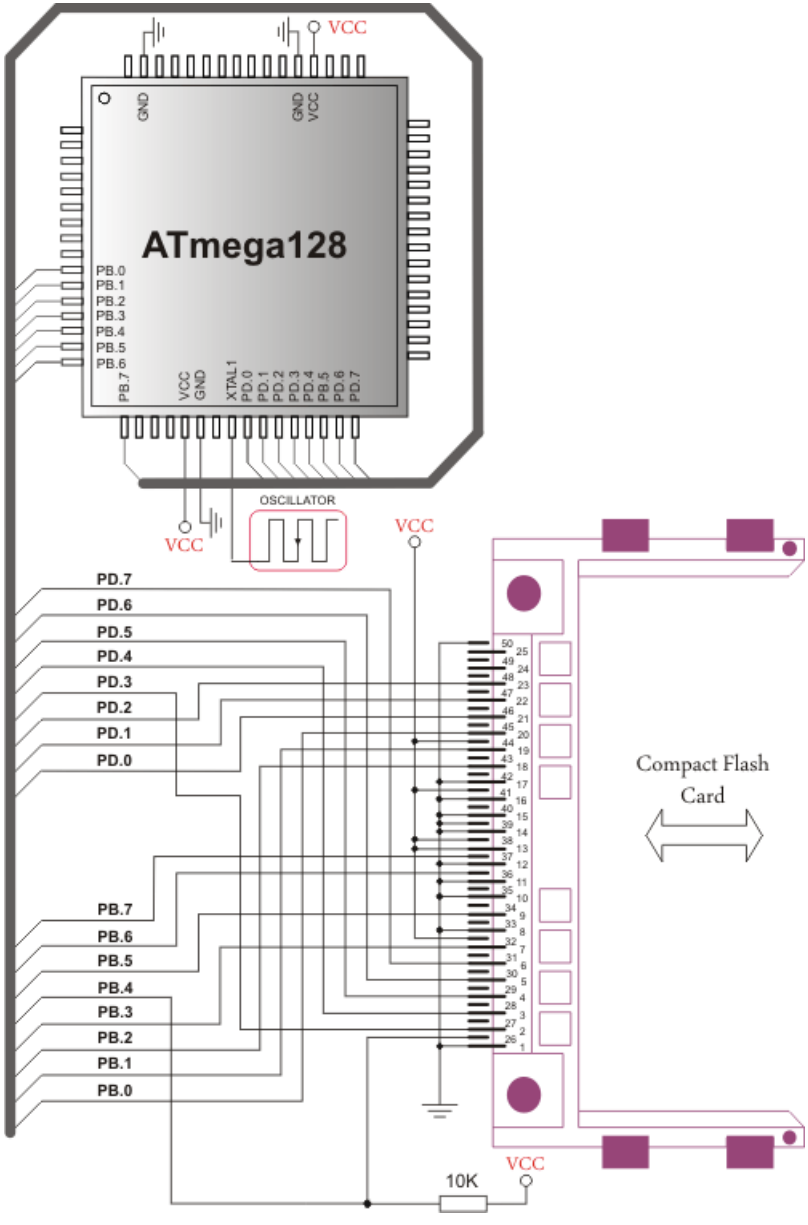

Pin diagram of CF memory card

EEPROM LIBRARY

EEPROM data memory is available with a number of AVR family. The mikroBasic PRO for AVR includes a library for comfortable work with MCU's internal EEPROM.

Note: EEPROM Library functions implementation is MCU dependent, consult the appropriate MCU datasheet for details about available EEPROM size and address range.

Library Routines

- EEPROM_Read
- EEPROM_Write

EEPROM_Read

Prototype	`sub function EEPROM_Read(dim address as word) as byte`
Returns	Byte from the specified address.
Description	Reads data from specified address. Parameters : - `address:` address of the EEPROM memory location to be read.
Requires	Nothing.

Example	`dim eeAddr as word`
	`temp as byte`
	`...`
	`eeAddr = 2`
	`temp = EEPROM_Read(eeAddr)`

EEPROM_Write

Prototype	`sub procedure EEPROM_Write(dim address as word, dim wrdata as byte)`
Returns	Nothing.
Description	Writes wrdata to specified address. Parameters : - `address:` address of the EEPROM memory location to be written. - `wrdata:` data to be written. **Note:** Specified memory location will be erased before writing starts.
Requires	Nothing.

Example	`dim eeWrite as byte`
	`  wrAddr as word`
	`...`
	`eeWrite = 0x02`
	`wrAddr = 0xAA`
	`EEPROM_Write(wrAddr, eeWrite)`

Library Example

This example demonstrates using the EEPROM Library with ATmega16 MCU.

First, some data is written to EEPROM in byte and block mode; then the data is read from the same locations and displayed on PORTA, PORTB and PORTC.

```
program EEPROM

dim counter as byte                              ' loop variable

main:
  DDRA = 0xFF
  DDRB = 0xFF
  DDRC = 0xFF

  for counter = 0 to 31                          ' Fill data buffer
   EEPROM_Write(0x100 + counter, counter)            ' Write data to
address 0x100+counter
  next counter

  EEPROM_Write(0x02,0xAA)  ' Write some data at address 2
  EEPROM_Write(0x150,0x55) ' Write some data at address 0x150

  Delay_ms(1000)           ' Blink PORTA and PORTB diodes
  PORTA = 0xFF             '    to indicate reading start
  PORTB = 0xFF
  Delay_ms(1000)
  PORTA = 0x00
  PORTB = 0x00
  Delay_ms(1000)

  PORTA = EEPROM_Read(0x02)                          ' Read data from
address 2 and display it on PORTA
  PORTB = EEPROM_Read(0x150)                         ' Read data from
address 0x150 and display it on PORTB

  Delay_ms(1000)

  for counter = 0 to 31    ' Read 32 bytes block from address 0x100
      PORTC = EEPROM_Read(0x100+counter)             '    and display
data on PORTC
     Delay_ms(100)
  next counter
end.
```

FLASH MEMORY LIBRARY

This library provides routines for accessing microcontroller Flash memory. Note that prototypes differ for MCU to MCU due to the amount of Flash memory.

Note: Due to the AVR family flash specifics, flash library is MCU dependent. Since some AVR MCU's have more or less than 64kb of Flash memory, prototypes may be different from chip to chip.
Please refer to datasheet before using flash library.

Note: Currently, Write operations are not supported. See mikroBasic PRO for AVR specifics for details.

Library Routines

- FLASH_Read_Byte
- FLASH_Read_Bytes
- FLASH_Read_Word
- FLASH_Read_Words

FLASH_Read_Byte

Prototype	```' for MCUs with 64kb of Flash memory or less sub function FLASH_Read_Byte(dim address as word) as byte ' for MCUs with Flash memory larger than 64kb sub function FLASH_Read_Byte(dim address as longword) as byte```
Returns	Returns data byte from Flash memory.
Description	Reads data from the specified address in Flash memory.
Requires	Nothing.
Example	```' for MCUs with Flash memory larger than 64kb dim tmp as longword ... tmp = Flash_Read(0x0D00) ...```

FLASH_Read_Bytes

Prototype	`' for MCUs with 64kb of Flash memory or less`
	`sub procedure FLASH_Read_Bytes(dim address as word, dim buffer as ^byte, dim NoBytes as word)`
	
	`' for MCUs with Flash memory larger than 64kb`
	`sub procedure FLASH_Read_Bytes(dim address as longword, dim buffer as ^byte, dim NoBytes as word)`

Returns	Nothing.
Description	Reads number of data bytes defined by NoBytes parameter from the specified address in Flash memory to varibale pointed by buffer.
Requires	Nothing.

Example	`'for MCUs with Flash memory larger than 64kb`
	`const F_ADDRESS as longint = 0x200`
	`dim dat_buff[ 32]  as word`
	`...`
	`FLASH_Read_Bytes(F_ADDRESS,dat_buff, 64)`

FLASH_Read_Word

Prototype	`' for MCUs with 64kb of Flash memory or less`
	`sub function FLASH_Read_Word(dim address as word) as word`
	
	`' for MCUs with Flash memory larger than 64kb`
	`sub function FLASH_Read_Word(dim address as longword) as word`

Returns	Returns data word from Flash memory.
Description	Reads data from the specified address in Flash memory.
Requires	Nothing.

Example	`' for MCUs with Flash memory larger than 64kb`
	`dim tmp as longword`
	`...`
	`tmp = Flash_Read(0x0D00)`
	`...`

FLASH_Read_Words

Prototype	`' for MCUs with 64kb of Flash memory or less`
	`sub procedure FLASH_Read_Words(dim address as word, dim buffer as ^word, dim NoWords as word)`
	
	`' for MCUs with Flash memory larger than 64kb`
	`sub procedure FLASH_Read_Words(dim address as longword, dim buffer as ^word, dim NoWords as word)`

Returns	Nothing.
Description	Reads number of data words defined by `NoWords` parameter from the specified `address` in Flash memory to varibale pointed by `buffer`.
Requires	Nothing.

Example	`'for MCUs with Flash memory larger than 64kb`
	`const F_ADDRESS as longint = 0x200`
	`dim dat_buff[ 32] as word`
	`...`
	`FLASH_Read_Bytes(F_ADDRESS,dat_buff, 64)`

Library Example

The example demonstrates simple write to the flash memory for AVR, then reads the data and displays it on PORTB and PORTD.

```
program Flash_MCU_test

const F_ADDRESS as longint = 0x200

const data_ as word[ 32] = (                                    ' constant table
  0x0000,0x0001,0x0002,0x0003,0x0004,0x0005,0x0006,0x0007,
  0x0008,0x0009,0x000A,0x000B,0x000C,0x000D,0x000E,0x000F,
  0x0000,0x0100,0x0200,0x0300,0x0400,0x0500,0x0600,0x0700,
  0x0800,0x0900,0x0A00,0x0B00,0x0C00,0x0D00,0x0E00,0x0F00
 ) org 0x200

dim counter as byte
    word_ as word
    dat_buff as word[ 32]
    'dat_buff_ as word[ 32]
main:
  DDRD = 0xFF                                  ' set direction to be output
  DDRB = 0xFF                                  ' set direction to be output
  word_ = data_[ 0]                            '  link const table
```

```
counter = 0
  while ( counter < 64 )          ' reading 64 bytes in loop
    PORTD = FLASH_Read_Byte(F_ADDRESS + counter)     ' demonstration
of reading single byte
    Inc(counter)
    PORTB = FLASH_Read_Byte(F_ADDRESS + counter)     ' demonstration
of reading single byte
    Inc(counter)
    Delay_ms(200)
  wend

  FLASH_Read_Bytes(F_ADDRESS, @dat_buff, 64)         ' demonstration
of reading 64 bytes
  for counter = 0 to 31
    PORTD = dat_buff[ counter]     ' output low byte to PORTD
    PORTB = word((dat_buff[ counter] >> 8))           ' output high-
er byte to PORTB
    Delay_ms(200)
  next counter

  counter = 0
  while (counter <= 63)           ' reading 32 words in loop
    word_   = FLASH_Read_Word(F_ADDRESS + counter)    ' demonstration
of reading single word
    PORTD   = word_               ' output low byte to PORTD
    PORTB   = Hi(word_)' >> 8)    ' output higher byte to PORTB
    counter = counter + 2
    Delay_ms(200)
  wend

  FLASH_Read_Words(F_ADDRESS, @dat_buff, 32)         ' demonstration
of reading 64 bytes
  for counter = 0 to 31
    PORTD = dat_buff[ counter]     ' output low byte to PORTD
    PORTB = word((dat_buff[ counter] >> 8))           ' output high-
er byte to PORTB
    Delay_ms(200)
  next counter
end.
```

GRAPHIC LCD LIBRARY

The mikroBasic PRO for AVR provides a library for operating Graphic Lcd 128x64 (with commonly used Samsung KS108/KS107 controller).

For creating a custom set of Glcd images use Glcd Bitmap Editor Tool.

External dependencies of Graphic Lcd Library

The following variables must be defined in all projects using Graphic Lcd Library:	Description:	Example :
`dim GLCD_DataPort as byte sfr external`	Glcd Data Port.	`dim GLCD_DataPort as byte at PORTC`
`dim GLCD_DataPort_Direction as byte sfr external`	Direction of the Glcd Data Port.	`dim GLCD_DataPort_Direction as byte at DDRC`
`dim GLCD_CS1 as sbit sfr external`	Chip Select 1 line.	`dim GLCD_CS1 as sbit at PORTD.B2`
`dim GLCD_CS2 as sbit sfr external`	Chip Select 2 line.	`dim GLCD_CS2 as sbit at PORTD.B3`
`dim GLCD_RS as sbit sfr external`	Register select line.	`dim GLCD_RS as sbit at PORTD.B4`
`dim GLCD_RW as sbit sfr external`	Read/Write line.	`dim GLCD_RW as sbit at PORTD.B5`
`dim GLCD_RST as sbit sfr external`	Reset line.	`dim GLCD_RST as sbit at PORTD.B6`
`dim GLCD_EN as sbit sfr external`	Enable line.	`dim GLCD_EN as sbit at PORTD.B7`
`dim GLCD_CS1_Direction as sbit sfr external`	Direction of the Chip Select 1 pin.	`dim GLCD_CS1_Direction as sbit at DDRD.B2`
`dim GLCD_CS2_Direction as sbit sfr external`	Direction of the Chip Select 2 pin.	`dim GLCD_CS2_Direction as sbit at DDRD.B3`
`dim GLCD_RS_Direction as sbit sfr external`	Direction of the Register select pin.	`dim GLCD_RS_Direction as sbit at DDRD.B4`
`dim GLCD_RW_Direction as sbit sfr external`	Direction of the Read/Write pin.	`dim GLCD_RW_Direction as sbit at DDRD.B5`
`dim GLCD_EN_Direction as sbit sfr external`	Direction of the Enable pin.	`dim GLCD_EN_Direction as sbit at DDRD.B6`
`dim GLCD_RST_Direction as sbit sfr external`	Direction of the Reset pin.	`dim GLCD_RST_Direction as sbit at DDRD.B7`

Library Routines

Basic routines:

- Glcd_Init
- Glcd_Set_Side
- Glcd_Set_X
- Glcd_Set_Page
- Glcd_Read_Data
- Glcd_Write_Data

Advanced routines:

- Glcd_Fill
- Glcd_Dot
- Glcd_Line
- Glcd_V_Line
- Glcd_H_Line
- Glcd_Rectangle
- Glcd_Box
- Glcd_Circle
- Glcd_Set_Font
- Glcd_Write_Char
- Glcd_Write_Text
- Glcd_Image

Glcd_Init

Prototype	`sub procedure Glcd_Init()`
Returns	Nothing.
Description	Initializes the Glcd module. Each of the control lines is both port and pin configurable, while data lines must be on a single port (pins <0:7>).
Requires	Global variables : - `GLCD_CS1` : Chip select 1 signal pin - `GLCD_CS2` : Chip select 2 signal pin - `GLCD_RS` : Register select signal pin - `GLCD_RW` : Read/Write Signal pin - `GLCD_EN` : Enable signal pin - `GLCD_RST` : Reset signal pin - `GLCD_DataPort` : Data port - `GLCD_CS1_Direction` : Direction of the Chip select 1 pin - `GLCD_CS2_Direction` : Direction of the Chip select 2 pin - `GLCD_RS_Direction` : Direction of the Register select signal pin - `GLCD_RW_Direction` : Direction of the Read/Write signal pin - `GLCD_EN_Direction` : Direction of the Enable signal pin - `GLCD_RST_Direction` : Direction of the Reset signal pin - `GLCD_DataPort_Direction` : Direction of the Data port must be defined before using this function.

Example	`// Glcd module connections`
	`dim GLCD_DataPort as byte at PORTC`
	`GLCD_DataPort_Direction as byte at DDRC`
	
	`dim GLCD_CS1 as sbit at PORTD.B2`
	`GLCD_CS2 as sbit at PORTD.B3`
	`GLCD_RS as sbit at PORTD.B4`
	`GLCD_RW as sbit at PORTD.B5`
	`GLCD_EN as sbit at PORTD.B6`
	`GLCD_RST as sbit at PORTD.B7`
	
	`dim GLCD_CS1_Direction as sbit at DDRD.B2`
	`GLCD_CS2_Direction as sbit at DDRD.B3`
	`GLCD_RS_Direction as sbit at DDRD.B4`
	`GLCD_RW_Direction as sbit at DDRD.B5`
	`GLCD_EN_Direction as sbit at DDRD.B6`
	`GLCD_RST_Direction as sbit at DDRD.B7`
	`// End Glcd module connections`
	
	`...`
	
	`Glcd_Init()`

Glcd_Set_Side

Prototype	`sub procedure Glcd_Set_Side(dim x_pos as byte)`
Returns	Nothing.
Description	Selects Glcd side. Refer to the Glcd datasheet for detailed explaination. Parameters : - `x_pos:` position on x-axis. Valid values: 0..127 The parameter `x_pos` specifies the Glcd side: values from 0 to 63 specify the left side, values from 64 to 127 specify the right side. **Note:** For side, x axis and page layout explanation see schematic at the bottom of this page.
Requires	Glcd needs to be initialized, see Glcd_Init routine.

Example	The following two lines are equivalent, and both of them select the left side of Glcd:
	
	`Glcd_Select_Side(0)`
	`Glcd_Select_Side(10)`

Glcd_Set_X

Prototype	`sub procedure Glcd_Set_X(dim x_pos as byte)`
Returns	Nothing.
Description	Sets x-axis position to x_pos dots from the left border of Glcd within the selected side. Parameters : - `x_pos:` position on x-axis. Valid values: 0..63 **Note:** For side, x axis and page layout explanation see schematic at the bottom of this page.
Requires	Glcd needs to be initialized, see Glcd_Init routine.
Example	`Glcd_Set_X(25)`

Glcd_Set_Page

Prototype	`sub procedure Glcd_Set_Page(dim page as byte)`
Returns	Nothing.
Description	Selects page of the Glcd. Parameters : - `page:` page number. Valid values: 0..7 **Note:** For side, x axis and page layout explanation see schematic at the bottom of this page.
Requires	Glcd needs to be initialized, see Glcd_Init routine.
Example	`Glcd_Set_Page(5)`

Glcd_Read_Data

Prototype	`sub function Glcd_Read_Data() as byte`
Returns	One byte from Glcd memory.
Description	Reads data from from the current location of Glcd memory and moves to the next location.
Requires	Glcd needs to be initialized, see Glcd_Init routine. Glcd side, x-axis position and page should be set first. See functions Glcd_Set_Side, Glcd_Set_X, and Glcd_Set_Page.

Example	`dim data as byte`
	`...`
	`data = Glcd_Read_Data()`

Glcd_Write_Data

Prototype	`sub procedure Glcd_Write_Data(dim ddata as byte)`
Returns	Nothing.
Description	Writes one byte to the current location in Glcd memory and moves to the next location. Parameters : - `ddata:` data to be written
Requires	Glcd needs to be initialized, see Glcd_Init routine. Glcd side, x-axis position and page should be set first. See functions Glcd_Set_Side, Glcd_Set_X, and Glcd_Set_Page.

Example	`dim data as byte`
	`...`
	`Glcd_Write_Data(data)`

Glcd_Fill

Prototype	`sub procedure Glcd_Fill(dim pattern as byte)`
Returns	Nothing.
Description	Fills Glcd memory with the byte pattern. Parameters : - `pattern:` byte to fill Glcd memory with To clear the Glcd screen, use `Glcd_Fill(0).` To fill the screen completely, use `Glcd_Fill(0xFF).`
Requires	Glcd needs to be initialized, see Glcd_Init routine.
Example	`' Clear screen` `Glcd_Fill(0)`

Glcd_Dot

Prototype	`sub procedure Glcd_Dot(dim x_pos as byte, dim y_pos as byte, dim color as byte)`
Returns	Nothing.
Description	Draws a dot on Glcd at coordinates (`x_pos`, `y_pos`). Parameters : - `x_pos:` x position. Valid values: 0..127 - `y_pos:` y position. Valid values: 0..63 - `color:` color parameter. Valid values: 0..2 The parameter `color` determines a dot state: 0 clears dot, 1 puts a dot, and 2 inverts dot state. **Note:** For x and y axis layout explanation see schematic at the bottom of this page.
Requires	Glcd needs to be initialized, see Glcd_Init routine.
Example	`' Invert the dot in the upper left corner` `Glcd_Dot(0, 0, 2)`

Glcd_Line

Prototype	`sub procedure Glcd_Line(dim x_start as integer, dim y_start as integer, dim x_end as integer, dim y_end as integer, dim color as byte)`
Returns	Nothing.
Description	Draws a line on Glcd. Parameters : - `x_start:` x coordinate of the line start. Valid values: 0..127 - `y_start:` y coordinate of the line start. Valid values: 0..63 - `x_end:` x coordinate of the line end. Valid values: 0..127 - `y_end:` y coordinate of the line end. Valid values: 0..63 - `color:` color parameter. Valid values: 0..2 The parameter color determines the line color: 0 white, 1 black, and 2 inverts each dot.
Requires	Glcd needs to be initialized, see Glcd_Init routine.
Example	`' Draw a line between dots (0,0) and (20,30)` `Glcd_Line(0, 0, 20, 30, 1)`

Glcd_V_Line

Prototype	`sub procedure Glcd_V_Line(dim y_start as byte, dim y_end as byte, dim x_pos as byte, dim color as byte)`
Returns	Nothing.
Description	Draws a vertical line on Glcd. Parameters : - `y_start:` y coordinate of the line start. Valid values: 0..63 - `y_end:` y coordinate of the line end. Valid values: 0..63 - `x_pos:` x coordinate of vertical line. Valid values: 0..127 - `color:` color parameter. Valid values: 0..2 The parameter `color` determines the line color: 0 white, 1 black, and 2 inverts each dot.
Requires	Glcd needs to be initialized, see Glcd_Init routine.
Example	`' Draw a vertical line between dots (10,5) and (10,25)` `Glcd_V_Line(5, 25, 10, 1)`

Glcd_H_Line

Prototype	`sub procedure Glcd_V_Line(dim x_start as byte, dim x_end as byte, dim y_pos as byte, dim color as byte)`
Returns	Nothing.
Description	Draws a horizontal line on Glcd. Parameters : - `x_start:` x coordinate of the line start. Valid values: 0..127 - `x_end:` x coordinate of the line end. Valid values: 0..127 - `y_pos:` y coordinate of horizontal line. Valid values: 0..63 - `color:` color parameter. Valid values: 0..2 The parameter `color` determines the line color: 0 white, 1 black, and 2 inverts each dot.
Requires	Glcd needs to be initialized, see Glcd_Init routine.
Example	`' Draw a horizontal line between dots (10,20) and (50,20)` `Glcd_H_Line(10, 50, 20, 1)`

Glcd_Rectangle

Prototype	`sub procedure Glcd_Rectangle(dim x_upper_left as byte, dim y_upper_left as byte, dim x_bottom_right as byte, dim y_bottom_right as byte, dim color as byte)`
Returns	Nothing.
Description	Draws a rectangle on Glcd. Parameters : - `x_upper_left:` x coordinate of the upper left rectangle corner. Valid values: 0..127 - `y_upper_left:` y coordinate of the upper left rectangle corner. Valid values: 0..63 - `x_bottom_right:` x coordinate of the lower right rectangle corner. Valid values: 0..127 - `y_bottom_right:` y coordinate of the lower right rectangle corner. Valid values: 0..63 - `color:` color parameter. Valid values: 0..2 The parameter `color` determines the color of the rectangle border: 0 white, 1 black, and 2 inverts each dot.
Requires	Glcd needs to be initialized, see Glcd_Init routine.
Example	`' Draw a rectangle between dots (5,5) and (40,40)` `Glcd_Rectangle(5, 5, 40, 40, 1)`

Glcd_Box

Prototype	`sub procedure Glcd_Box(dim x_upper_left as byte, dim y_upper_left as byte, dim x_bottom_right as byte, dim y_bottom_right as byte, dim color as byte)`
Returns	Nothing.
Description	Draws a box on Glcd. Parameters : - `x_upper_left:` x coordinate of the upper left box corner. Valid values: 0..127 - `y_upper_left:` y coordinate of the upper left box corner. Valid values: 0..63 - `x_bottom_right:` x coordinate of the lower right box corner. Valid values: 0..127 - `y_bottom_right:` y coordinate of the lower right box corner. Valid values: 0..63 - `color:` color parameter. Valid values: 0..2 The parameter `color` determines the color of the box fill: 0 white, 1 black, and 2 inverts each dot.
Requires	Glcd needs to be initialized, see Glcd_Init routine.
Example	`' Draw a box between dots (5,15) and (20,40)` `Glcd_Box(5, 15, 20, 40, 1)`

Glcd_Circle

Prototype	`sub procedure Glcd_Circle(dim x_center as integer, dim y_center as integer, dim radius as integer, dim color as byte)`
Returns	Nothing.
Description	Draws a circle on Glcd. Parameters : - `x_center:` x coordinate of the circle center. Valid values: 0..127 - `y_center:` y coordinate of the circle center. Valid values: 0..63 - `radius:` radius size - `color:` color parameter. Valid values: 0..2 The parameter `color` determines the color of the circle line: 0 white, 1 black, and 2 inverts each dot.
Requires	Glcd needs to be initialized, see Glcd_Init routine.
Example	`' Draw a circle with center in (50,50) and radius=10` `Glcd_Circle(50, 50, 10, 1)`

Glcd_Set_Font

Prototype	`sub procedure Glcd_Set_Font(dim byref const ActiveFont as ^byte, dim FontWidth as byte, dim FontHeight as byte, dim FontOffs as word)`
Returns	Nothing.
Description	Sets font that will be used with Glcd_Write_Char and Glcd_Write_Text routines. Parameters : - `activeFont:` font to be set. Needs to be formatted as an array of char - `aFontWidth:` width of the font characters in dots. - `aFontHeight:` height of the font characters in dots. - `aFontOffs:` number that represents difference between the mikroBasic PRO for AVR character set and regular ASCII set (eg. if 'A' is 65 in ASCII character, and 'A' is 45 in the mikroBasic PRO for AVR character set, aFontOffs is 20). Demo fonts supplied with the library have an offset of 32, which means that they start with space. The user can use fonts given in the file “__Lib_GLCDFonts.mbas” file located in the Uses folder or create his own fonts.
Requires	Glcd needs to be initialized, see Glcd_Init routine.
Example	`' Use the custom 5x7 font "myfont" which starts with space (32):` `Glcd_Set_Font(myfont, 5, 7, 32)`

Glcd_Write_Char

Prototype	`sub procedure Glcd_Write_Char(dim chr as byte, dim x_pos as byte, dim page_num as byte, dim color as byte)`
Returns	Nothing.
Description	Prints character on the Glcd. Parameters : - `chr:` character to be written - `x_pos:` character starting position on x-axis. Valid values: 0..(127-FontWidth) - `page_num:` the number of the page on which character will be written. Valid values: 0..7 - `color:` color parameter. Valid values: 0..2 The parameter `color` determines the color of the character: 0 white, 1 black, and 2 inverts each dot. **Note:** For x axis and page layout explanation see schematic at the bottom of this page.
Requires	Glcd needs to be initialized, see Glcd_Init routine. Use Glcd_Set_Font to specify the font for display; if no font is specified, then default 5x8 font supplied with the library will be used.
Example	`' Write character 'C' on the position 10 inside the page 2:` `Glcd_Write_Char('C', 10, 2, 1)`

Glcd_Write_Text

Prototype	`sub procedure Glcd_Write_Text(dim byref text as string[20], dim x_pos as byte, dim page_num as byte, dim color as byte)`
Returns	Nothing.
Description	Prints text on Glcd. Parameters : - `text:` text to be written - `x_pos:` text starting position on x-axis. - `page_num:` the number of the page on which text will be written. Valid values: 0..7 - `color:` color parameter. Valid values: 0..2 The parameter `color` determines the color of the text: 0 white, 1 black, and 2 inverts each dot. **Note:** For x axis and page layout explanation see schematic at the bottom of this page.
Requires	Glcd needs to be initialized, see Glcd_Init routine. Use Glcd_Set_Font to specify the font for display; if no font is specified, then default 5x8 font supplied with the library will be used.
Example	`' Write text "Hello world!" on the position 10 inside the page 2:` `Glcd_Write_Text("Hello world!", 10, 2, 1)`

Glcd_Image

Prototype	`sub procedure Glcd_Image(dim byref const image as ^byte)`
Returns	Nothing.
Description	Displays bitmap on Glcd. Parameters : - `image:` image to be displayed. Bitmap array must be located in code memory. Use the mikroBasic PRO for AVR integrated Glcd Bitmap Editor to convert image to a constant array suitable for displaying on Glcd.
Requires	Glcd needs to be initialized, see Glcd_Init routine.
Example	`' Draw image my_image on Glcd` `Glcd_Image(my_image)`

Library Example

The following example demonstrates routines of the Glcd library: initialization, clear(pattern fill), image displaying, drawing lines, circles, boxes and rectangles, text displaying and handling.

```
program Glcd_Test

include bitmap

' Glcd module connections
dim GLCD_DataPort as byte at PORTC
     GLCD_DataPort_Direction as byte at DDRC

dim GLCD_CS1 as sbit at PORTD.B2
     GLCD_CS2 as sbit at PORTD.B3
     GLCD_RS  as sbit at PORTD.B4
     GLCD_RW  as sbit at PORTD.B5
     GLCD_EN  as sbit at PORTD.B6
     GLCD_RST as sbit at PORTD.B7

dim GLCD_CS1_Direction as sbit at DDRD.B2
     GLCD_CS2_Direction as sbit at DDRD.B3
     GLCD_RS_Direction  as sbit at DDRD.B4
     GLCD_RW_Direction  as sbit at DDRD.B5
     GLCD_EN_Direction  as sbit at DDRD.B6
     GLCD_RST_Direction as sbit at DDRD.B7
' End Glcd module connections

dim counter as byte
     someText as char[ 18]

sub procedure Delay2S()                          ' 2 seconds delay sub
function
  Delay_ms(2000)
end sub

main:
  Glcd_Init()                                    ' Initialize Glcd
  Glcd_Fill(0x00)                                ' Clear Glcd

  while TRUE
    Glcd_Image(@truck_bmp)                       ' Draw image
    Delay2S() delay2S()

    Glcd_Fill(0x00)                              ' Clear Glcd

    Glcd_Box(62,40,124,63,1)                     ' Draw box
    Glcd_Rectangle(5,5,84,35,1)                  ' Draw rectangle
    Glcd_Line(0, 0, 127, 63, 1)                  ' Draw line
    Delay2S()
    counter = 5
```

```
    while (counter <= 59)     ' Draw horizontal and vertical lines
      Delay_ms(250)
      Glcd_V_Line(2, 54, counter, 1)
      Glcd_H_Line(2, 120, counter, 1)
      Counter = counter + 5
    wend

    Delay2S()

    Glcd_Fill(0x00)                              ' Clear Glcd

        Glcd_Set_Font(@Character8x7,  8,  7,  32)  '  Choose  font
"Character8x7"
    Glcd_Write_Text("mikroE", 1, 7, 2)      ' Write string

    for counter = 1 to 10                     ' Draw circles
      Glcd_Circle(63,32, 3*counter, 1)
    next counter
    Delay2S()

    Glcd_Box(12,20, 70,57, 2)                ' Draw box
    Delay2S()

    Glcd_Fill(0xFF)                           ' Fill Glcd
    Glcd_Set_Font(@Character8x7, 8, 7, 32)   ' Change font
    someText = "8x7 Font"
    Glcd_Write_Text(someText, 5, 0, 2)      ' Write string
    delay2S()

    Glcd_Set_Font(@System3x6, 3, 5, 32)      ' Change font
    someText = "3X5 CAPITALS ONLY"
    Glcd_Write_Text(someText, 60, 2, 2)     ' Write string
    delay2S()

    Glcd_Set_Font(@font5x7, 5, 7, 32)        ' Change font
    someText = "5x7 Font"
    Glcd_Write_Text(someText, 5, 4, 2)      ' Write string
    delay2S()

    Glcd_Set_Font(@FontSystem5x7_v2, 5, 7, 32) ' Change font
    someText = "5x7 Font (v2)"
    Glcd_Write_Text(someText, 5, 6, 2)      ' Write string
    delay2S()
  wend
end.
```

HW Connection

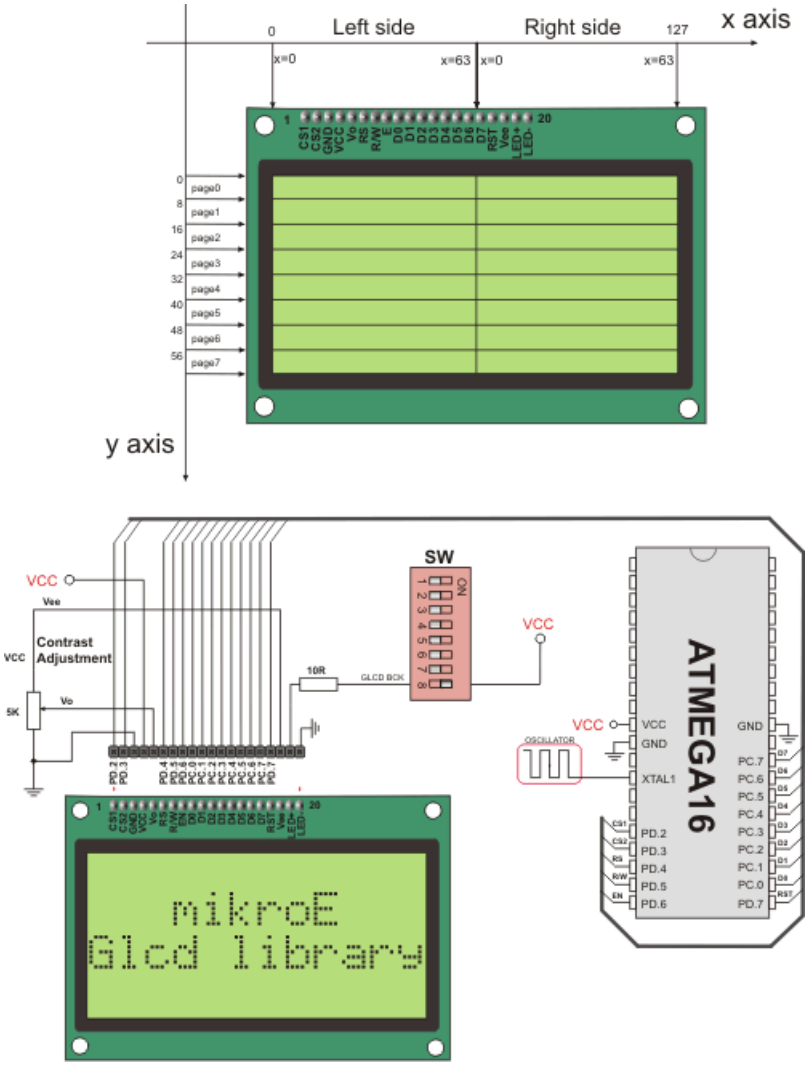

Glcd HW connection

KEYPAD LIBRARY

The mikroBasic PRO for AVR provides a library for working with 4x4 keypad. The library routines can also be used with 4x1, 4x2, or 4x3 keypad. For connections explanation see schematic at the bottom of this page.

Note: Since sampling lines for AVR MCUs are activated by logical zero Keypad Library can not be used with hardwares that have protective diodes connected with anode to MCU side, such as mikroElektronika's Keypad extra board HW.Rev v1.20

The following variable must be defined in all projects using Keypad Library:	Description:	Example :
`dim keypadPort as byte sfr external`	Keypad Port.	`dim keypadPort as byte at PORTB`
`dim keypadPort_Direction as byte sfr external`	Direction of the Keypad Port.	`dim keypadPort_Direction as byte at DDRB`

Library Routines

- Keypad_Init
- Keypad_Key_Press
- Keypad_Key_Click

Keypad_Init

Prototype	`sub procedure Keypad_Init()`
Returns	Nothing.
Description	Initializes port for working with keypad.
Requires	Global variables : - `keypadPort_Reg` - Keypad port - `keypadPort_Reg_Direction` - Direction of the Keypad port must be defined before using this function.

Example	`' Initialize PORTB for communication with keypad`
	`dim keypadPort as byte at PORTB`
	`dim keypadPort_Direction as byte at DDRB`
	`...`
	`Keypad_Init()`

Keypad_Key_Press

Prototype	`sub function Keypad_Key_Press() as byte`
Returns	The code of a pressed key (1..16). If no key is pressed, returns 0.
Description	Reads the key from keypad when key gets pressed.
Requires	Port needs to be initialized for working with the Keypad library, see Keypad_Init.

Example	`dim kp as byte`
	`...`
	`kp = Keypad_Key_Press()`

Keypad_Key_Click

Prototype	`sub function Keypad_Key_Click() as byte`
Returns	The code of a clicked key (1..16). If no key is clicked, returns 0.
Description	Call to Keypad_Key_Click is a blocking call: the function waits until some key is pressed and released. When released, the function returns 1 to 16, depending on the key. If more than one key is pressed simultaneously the function will wait until all pressed keys are released. After that the function will return the code of the first pressed key.
Requires	Port needs to be initialized for working with the Keypad library, see Keypad_Init.

Example	`dim kp as byte`
	`...`
	`kp = Keypad_Key_Click()`

Library Example

This is a simple example of using the Keypad Library. It supports keypads with 1..4 rows and 1..4 columns. The code being returned by Keypad_Key_Click() function is in range from 1..16. In this example, the code returned is transformed into ASCII codes [0..9,A..F] and displayed on Lcd. In addition, a small single-byte counter displays in the second Lcd row number of key presses.

```
program Keypad_Test
dim kp, cnt, oldstate as byte
    txt as byte[ 7]

' Keypad module connections
dim keypadPort as byte at PORTB
dim keypadPort_Direction as byte at DDRB
' End Keypad module connections

' Lcd pinout definition
dim LCD_RS as sbit at PORTD.2
    LCD_EN as sbit at PORTD.3
    LCD_D4 as sbit at PORTD.4
    LCD_D5 as sbit at PORTD.5
    LCD_D6 as sbit at PORTD.6
    LCD_D7 as sbit at PORTD.7

dim LCD_RS_Direction as sbit at DDRD.2
    LCD_EN_Direction as sbit at DDRD.3
    LCD_D4_Direction as sbit at DDRD.4
    LCD_D5_Direction as sbit at DDRD.5
    LCD_D6_Direction as sbit at DDRD.6
    LCD_D7_Direction as sbit at DDRD.7
' end Lcd pinout definitions

main:
  oldstate = 0
  cnt = 0                                   ' Reset counter
  Keypad_Init()                             ' Initialize Keypad
  Lcd_Init()                                ' Initialize Lcd
  Lcd_Cmd(LCD_CLEAR)                        ' Clear display
  Lcd_Cmd(LCD_CURSOR_OFF)                   ' Cursor off
  Lcd_Out(1, 1, "Key  :")                   ' Write message text on
LCD
  Lcd_Out(2, 1, "Times:")

  while TRUE

    kp = 0                                  ' Reset key code variable
```

```
' Wait for key to be pressed and released
   while ( kp = 0 )
     kp = Keypad_Key_Click()      ' Store key code in kp variable
   wend
   ' Prepare value for output, transform key to it"s ASCII value
   select case kp
     'case 10: kp = 42    ' "*"  ' Uncomment this block for keypad4x3
     'case 11: kp = 48    ' "0"
     'case 12: kp = 35    ' "#"
     'default: kp += 48

   case 1
    kp = 49  ' 1               ' Uncomment this block for keypad4x4
   case 2
     kp = 50  ' 2
   case 3
     kp = 51  ' 3
   case 4
     kp = 65  ' A
   case 5
     kp = 52  ' 4
   case 6
     kp = 53  ' 5
   case 7
     kp = 54  ' 6
   case 8
     kp = 66  ' B
   case 9
     kp = 55  ' 7
   case 10
     kp = 56  ' 8
   case 11
     kp = 57  ' 9
   case 12
     kp = 67  ' C
   case 13
     kp = 42  ' *
   case 14
     kp = 48  ' 0
   case 15
     kp = 35  ' #
   case 16
     kp = 68  ' D

end select

   if (kp <> oldstate) then  ' Pressed key differs from previous
     cnt = 1
     oldstate = kp
```

```
    else                                    ' Pressed key is same as previous
      Inc(cnt)
    end if
    Lcd_Chr(1, 10, kp)                      ' Print key ASCII value on Lcd

    if (cnt = 255) then                     ' If counter varialble overflow
      cnt = 0
      Lcd_Out(2, 10, "      ")
    end if

    WordToStr(cnt, txt)                     ' Transform counter value to string


    Lcd_Out(2, 10, txt)                     ' Display counter value on Lcd
  wend
end.
```

HW Connection

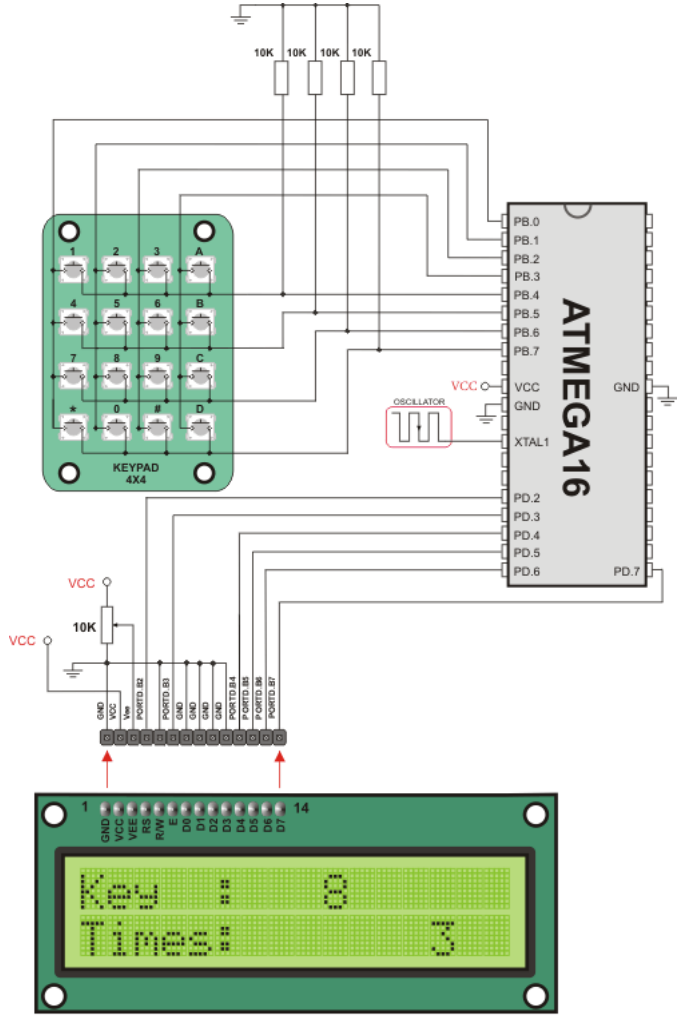

LCD 2X16

4x4 Keypad connection scheme

LCD LIBRARY

The mikroBasic PRO for AVR provides a library for communication with Lcds (with HD44780 compliant controllers) through the 4-bit interface. An example of Lcd connections is given on the schematic at the bottom of this page.

For creating a set of custom Lcd characters use Lcd Custom Character Tool.

External dependencies of Lcd Library

The following variables must be defined in all projects using Lcd Library:	Description:	Example :
`dim LCD_RS as sbit sfr external`	Register Select line.	`dim LCD_RS as sbit at PORTD.B2`
`dim LCD_EN as sbit sfr external`	Enable line.	`dim LCD_EN as sbit at PORTD.B3`
`dim LCD_D7 as sbit sfr external`	Data 7 line.	`dim LCD_D7 as sbit at PORTD.B4`
`dim LCD_D6 as sbit sfr external`	Data 6 line.	`dim LCD_D6 as sbit at PORTD.B5`
`dim LCD_D5 as sbit sfr external`	Data 5 line.	`dim LCD_D5 as sbit at PORTD.B6`
`dim LCD_D4 as sbit sfr external`	Data 4 line.	`dim LCD_D4 as sbit at PORTD.B7`
`dim LCD_RS_Direction as sbit sfr external`	Register Select direction pin.	`dim LCD_RS_Direction as sbit at DDRD.B2`
`dim LCD_EN_Direction as sbit sfr external`	Enable direction pin.	`dim LCD_EN_Direction as sbit at DDRD.B3`
`dim LCD_D7_Direction as sbit sfr external`	Data 7 direction pin.	`dim LCD_D7_Direction as sbit at DDRD.B4`
`dim LCD_D6_Direction as sbit sfr external`	Data 6 direction pin.	`dim LCD_D6_Direction as sbit at DDRD.B5`
`dim LCD_D5_Direction as sbit sfr external`	Data 5 direction pin.	`dim LCD_D5_Direction as sbit at DDRD.B6`
`dim LCD_D4_Direction as sbit sfr external`	Data 4 direction pin.	`dim LCD_D4_Direction as sbit at DDRD.B7`

Library Routines

- Lcd_Init
- Lcd_Out
- Lcd_Out_Cp
- Lcd_Chr
- Lcd_Chr_Cp
- Lcd_Cmd

Lcd_Init

Prototype	`sub procedure Lcd_Init()`
Returns	Nothing.
Description	Initializes Lcd module.
Requires	Global variables: - `LCD_D7:` Data bit 7 - `LCD_D6:` Data bit 6 - `LCD_D5:` Data bit 5 - `LCD_D4:` Data bit 4 - `LCD_RS:` Register Select (data/instruction) signal pin - `LCD_EN:` Enable signal pin - `LCD_D7_Direction:` Direction of the Data 7 pin - `LCD_D6_Direction:` Direction of the Data 6 pin - `LCD_D5_Direction:` Direction of the Data 5 pin - `LCD_D4_Direction:` Direction of the Data 4 pin - `LCD_RS_Direction:` Direction of the Register Select pin - `LCD_EN_Direction:` Direction of the Enable signal pin must be defined before using this function.

Example	```' Lcd module connections
	dim
	  LCD_RS as sbit at PORTD.B2
	  LCD_EN as sbit at PORTD.B3
	  LCD_D7 as sbit at PORTD.B4
	  LCD_D6 as sbit at PORTD.B5
	  LCD_D5 as sbit at PORTD.B6
	  LCD_D4 as sbit at PORTD.B7
	
	dim
	  LCD_RS as sbit at DDRD.B2
	  LCD_EN as sbit at DDRD.B3
	  LCD_D7 as sbit at DDRD.B4
	  LCD_D6 as sbit at DDRD.B5
	  LCD_D5 as sbit at DDRD.B6
	  LCD_D4 as sbit at DDRD.B7
	' End Lcd module connections
	...
	
	Lcd_Init()```

Lcd_Out

Prototype	`sub procedure Lcd_Out(dim row as byte, dim column as byte, dim byref text as string[20])`
Returns	Nothing.
Description	Prints text on Lcd starting from specified position. Both string variables and literals can be passed as a text. Parameters : - `row:` starting position row number - `column:` starting position column number - `text:` text to be written
Requires	The Lcd module needs to be initialized. See Lcd_Init routine.
Example	`' Write text "Hello!" on Lcd starting from row 1, column 3:` `Lcd_Out(1, 3, "Hello!")`

Lcd_Out_Cp

Prototype	`sub procedure Lcd_Out_Cp(dim byref text as string[19])`
Returns	Nothing.
Description	Prints text on Lcd at current cursor position. Both string variables and literals can be passed as a text. Parameters : - `text:` text to be written
Requires	The Lcd module needs to be initialized. See Lcd_Init routine.
Example	`' Write text "Here!" at current cursor position:` `Lcd_Out_Cp("Here!")`

Lcd_Chr

Prototype	`sub procedure Lcd_Chr(dim row as byte, dim column as byte, dim out_char as byte)`
Returns	Nothing.
Description	Prints character on Lcd at specified position. Both variables and literals can be passed as a character. Parameters : - `row:` writing position row number - `column:` writing position column number - `out_char:` character to be written
Requires	The Lcd module needs to be initialized. See Lcd_Init routine.
Example	`' Write character "i" at row 2, column 3:` `Lcd_Chr(2, 3, 'i')`

Lcd_Chr_Cp

Prototype	`sub procedure Lcd_Chr_Cp(dim out_char as byte)`
Returns	Nothing.
Description	Prints character on Lcd at current cursor position. Both variables and literals can be passed as a character. Parameters : - `out_char:` character to be written
Requires	The Lcd module needs to be initialized. See Lcd_Init routine.
Example	`' Write character "e" at current cursor position:` `Lcd_Chr_Cp('e')`

Lcd_Cmd

Prototype	`sub procedure Lcd_Cmd(dim out_char as byte)`
Returns	Nothing.
Description	Sends command to Lcd. Parameters : - `out_char:` command to be sent **Note:** Predefined constants can be passed to the function, see Available SPI Lcd Commands.
Requires	The Lcd module needs to be initialized. See Lcd_Init table.
Example	`' Clear Lcd display:` `Lcd_Cmd(LCD_CLEAR)`

Available Lcd Commands

Lcd Command	Purpose
LCD_FIRST_ROW	Move cursor to the 1st row
LCD_SECOND_ROW	Move cursor to the 2nd row
LCD_THIRD_ROW	Move cursor to the 3rd row
LCD_FOURTH_ROW	Move cursor to the 4th row
LCD_CLEAR	Clear display
LCD_RETURN_HOME	Return cursor to home position, returns a shifted display to its original position. Display data RAM is unaffected.
LCD_CURSOR_OFF	Turn off cursor
LCD_UNDERLINE_ON	Underline cursor on
LCD_BLINK_CURSOR_ON	Blink cursor on
LCD_MOVE_CURSOR_LEFT	Move cursor left without changing display data RAM
LCD_MOVE_CURSOR_RIGHT	Move cursor right without changing display data RAM
LCD_TURN_ON	Turn Lcd display on
LCD_TURN_OFF	Turn Lcd display off
LCD_SHIFT_LEFT	Shift display left without changing display data RAM
LCD_SHIFT_RIGHT	Shift display right without changing display data RAM

Library Example

The following code demonstrates usage of the Lcd Library routines:

```
' LCD module connections
dim LCD_RS as sbit at PORTD.2
dim LCD_EN as sbit at PORTD.3
dim LCD_D4 as sbit at PORTD.4
dim LCD_D5 as sbit at PORTD.5
dim LCD_D6 as sbit at PORTD.6
dim LCD_D7 as sbit at PORTD.7

dim LCD_RS_Direction as sbit at DDRD.B2
dim LCD_EN_Direction as sbit at DDRD.B3
dim LCD_D4_Direction as sbit at DDRD.B4
dim LCD_D5_Direction as sbit at DDRD.B5
dim LCD_D6_Direction as sbit at DDRD.B6
dim LCD_D7_Direction as sbit at DDRD.B7
' End Lcd module connections

dim txt1 as char[ 17]
     txt2 as char[ 10]
     txt3 as char[ 9]
     txt4 as char[ 8]
     i     as byte            ' Loop variable

sub procedure Move_Delay() ' Function used for text moving
  Delay_ms(500)            ' You can change the moving speed here
end sub

main:
     txt1 = "mikroElektronika"
     txt2 = "EasyAVR5A"
     txt3 = "Lcd4bit"
     txt4 = "example"
     Lcd_Init()                          ' Initialize Lcd
     Lcd_Cmd(LCD_CLEAR)                  ' Clear display
     Lcd_Cmd(LCD_CURSOR_OFF)             ' Cursor off
     LCD_Out(1,6,txt3)                   ' Write text in first row
     LCD_Out(2,6,txt4)                   ' Write text in second row
     Delay_ms(2000)
     Lcd_Cmd(LCD_CLEAR)                  ' Clear display

     LCD_Out(1,1,txt1)                   ' Write text in first row
     LCD_Out(2,4,txt2)                   ' Write text in second row
     Delay_ms(500)

     ' Moving text
     for i=0 to 3               ' Move text to the right 4 times
```

```
    Lcd_Cmd(LCD_SHIFT_RIGHT)
      Move_Delay()
    next i

    while TRUE                              ' Endless loop
      for i=0 to 6                  ' Move text to the left 7 times
        Lcd_Cmd(LCD_SHIFT_LEFT)
        Move_Delay()
      next i
      for i=0 to 6                  ' Move text to the right 7 times
        Lcd_Cmd(LCD_SHIFT_RIGHT)
        Move_Delay()
      next i
    wend
end.
```

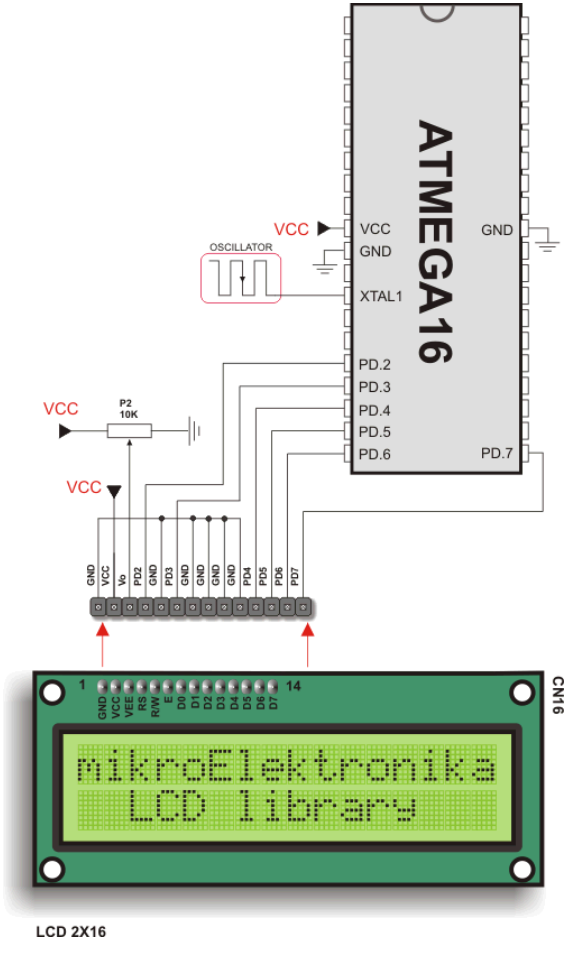

Lcd HW connection

MANCHESTER CODE LIBRARY

The mikroBasic PRO for AVR provides a library for handling Manchester coded signals. The Manchester code is a code in which data and clock signals are combined to form a single self-synchronizing data stream; each encoded bit contains a transition at the midpoint of a bit period, the direction of transition determines whether the bit is 0 or 1; the second half is the true bit value and the first half is the complement of the true bit value (as shown in the figure below).

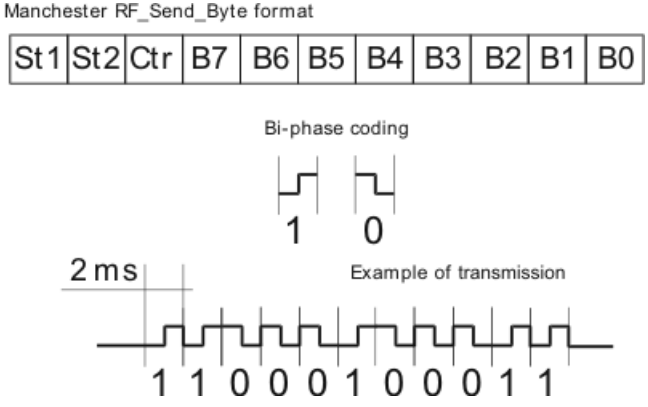
Manchester RF_Send_Byte format
St1 St2 Ctr B7 B6 B5 B4 B3 B2 B1 B0
Bi-phase coding
1
0
2 ms
Example of transmission
1 1 0 0 0 1 0 0 0 1 1

Notes: The Manchester receive routines are blocking calls (`Man_Receive_Init` and `Man_Synchro`). This means that MCU will wait until the task has been performed (e.g. byte is received, synchronization achieved, etc).

Note: Manchester code library implements time-based activities, so interrupts need to be disabled when using it.

External dependencies of Manchester Code Library

The following variables must be defined in all projects using Manchester Code Library:	Description:	Example :
`dim MANRXPIN as sbit sfr external`	Receive line.	`dim MANRXPIN as sbit at PINB.B0`
`dim MANTXPIN as sbit sfr external`	Transmit line.	`dim MANTXPIN as sbit at PORTB.B1`
`dim MANRXPIN_Direction as sbit sfr external`	Direction of the Receive pin.	`dim MANRXPIN_Direction as sbit at DDRB.B0`
`dim MANTXPIN_Direction as sbit sfr external`	Direction of the Transmit pin.	`dim MANTXPIN_Direction as sbit at DDRB.B1`

Library Routines

- Man_Receive_Init
- Man_Receive
- Man_Send_Init
- Man_Send
- Man_Synchro
- Man_Break

The following routines are for the internal use by compiler only:

- Manchester_0
- Manchester_1
- Manchester_Out

Man_Receive_Init

Prototype	`sub function Man_Receive_Init()as word`
Returns	- `0` - if initialization and synchronization were successful. - `1` - upon unsuccessful synchronization.
Description	The function configures Receiver pin and performs synchronization procedure in order to retrieve baud rate out of the incoming signal. **Note:** In case of multiple persistent errors on reception, the user should call this routine once again or Man_Synchro routine to enable synchronization.
Requires	Global variables : - `MANRXPIN` : Receive line - `MANRXPIN_Direction` : Direction of the receive pin must be defined before using this function.

Example	`' Initialize Receiver`
	`dim MANRXPIN as sbit at PINB.B0`
	`dim MANRXPIN_Direction as sbit at DDRB.B0`
	`...`
	`Man_Receive_Init()`

Man_Receive

Prototype	`sub function Man_Receive(dim byreferror as byte) as byte`
Returns	A byte read from the incoming signal.
Description	The function extracts one byte from incoming signal. Parameters : - `error:` error flag. If signal format does not match the expected, the error flag will be set to non-zero.
Requires	To use this function, the user must prepare the MCU for receiving. See Man_Receive_Init.

Example	`dim data, error as byte`
	`...`
	`data = 0`
	`error = 0`
	`data = Man_Receive(&error)`
	
	`if (error <> 0) then`
	`' error handling`
	`end if`

Man_Send_Init

Prototype	`sub procedure Man_Send_Init()`
Returns	Nothing.
Description	The function configures Transmitter pin.
Requires	Global variables : - `MANRXPIN` : Receive line - `MANRXPIN_Direction` : Direction of the receive pin must be defined before using this function.

Example	`' Initialize Transmitter:`
	`dim MANTXPIN as sbit at PINB.B1`
	`dim MANTXPIN_Direction as sbit at DDRB.B1`
	`...`
	`Man_Send_Init()`

Man_Send

Prototype	`sub procedure Man_Send(tr_data as byte)`
Returns	Nothing.
Description	Sends one byte. Parameters : - `tr_data:` data to be sent **Note:** Baud rate used is 500 bps.
Requires	To use this function, the user must prepare the MCU for sending. See Man_Send_Init.

Example	`dim msg as byte`
	`...`
	`Man_Send(msg)`

Man_Synchro

Prototype	`sub function Man_Synchro() as word`
Returns	- `0` - if synchronization was not successful. - Half of the manchester bit length, given in multiples of 10us - upon successful synchronization.
Description	Measures half of the manchester bit length with 10us resolution.
Requires	To use this function, you must first prepare the MCU for receiving. See Man_Receive_Init.

Example	`dim man__half_bit_len as word`
	`...`
	`man__half_bit_len = Man_Synchro()`

Man_Break

Prototype	`sub procedure Man_Break()`
Returns	Nothing.
Description	Man_Receive is blocking routine and it can block the program flow. Call this routine from interrupt to unblock the program execution. This mechanism is similar to WDT. **Note:** Interrupts should be disabled before using Manchester routines again (see note at the top of this page).
Requires	Nothing.
Example	

```
dim data1, error, counter as byte

sub procedure Timer0Overflow_ISR org 0x12
  counter = 0
  if (counter >= 20) then
    Man_Break()
    counter = 0                  ' reset counter
  else
    Inc(counter)                 ' increment counter
  end if
end sub

main:
  TOIE0_bit  = 1           ' Timer0 overflow interrupt enable
  TCCR0_bit  = 5           ' Start timer with 1024 prescaler

  SREG_I_bit = 0                       ' Interrupt disable

  ...

  Man_Receive_Init()

  ...

  ' try Man_Receive with blocking prevention mechanism

  SREG_I_bit = 1                       ' Interrupt enable
  data1 = Man_Receive(@error);
  SREG_I_bit = 0                       ' Interrupt disable

  ...

end.
```

Library Example

The following code is code for the Manchester receiver, it shows how to use the Manchester Library for receiving data:

```
program Manchester_Receiver

' Lcd module connections
dim LCD_RS as sbit at PORTD.B2
    LCD_EN as sbit at PORTD.B3
    LCD_D4 as sbit at PORTD.B4
    LCD_D5 as sbit at PORTD.B5
    LCD_D6 as sbit at PORTD.B6
    LCD_D7 as sbit at PORTD.B7

dim LCD_RS_Direction as sbit at DDRD.B2
    LCD_EN_Direction as sbit at DDRD.B3
    LCD_D4_Direction as sbit at DDRD.B4
    LCD_D5_Direction as sbit at DDRD.B5
    LCD_D6_Direction as sbit at DDRD.B6
    LCD_D7_Direction as sbit at DDRD.B7
' End Lcd module connections

' Manchester module connections
dim MANRXPIN as sbit at PINB.B0
    MANRXPIN_Direction as sbit at DDRB.B0
    MANTXPIN as sbit at PORTB.B1
    MANTXPIN_Direction as sbit at DDRB.B1
' End Manchester module connections

dim error_, ErrorCount, temp as byte

main:
  ErrorCount = 0
  Delay_10us()
  Lcd_Init()                              ' Initialize Lcd
  Lcd_Cmd(LCD_CLEAR)                      ' Clear Lcd display

  Man_Receive_Init()                      ' Initialize Receiver

  while TRUE                            ' Endless loop
    Lcd_Cmd(LCD_FIRST_ROW)              ' Move cursor to the 1st row
    while TRUE                          ' Wait for the "start" byte
      temp = Man_Receive(error_)      ' Attempt byte receive
      if (temp = 0x0B) then ' "Start" byte, see Transmitter example
        break                           ' We got the starting sequence
      end if
      if (error_ <> 0) then   ' Exit so we do not loop forever
        break
      end if
    wend
```

```
 while (temp <> 0x0E)
       temp = Man_Receive(error_)       ' Attempt byte receive
       if (error_ <> 0) then            ' If error occured
         Lcd_Chr_CP("?")                ' Write question mark on Lcd
         Inc(ErrorCount)                ' Update error counter
         if (ErrorCount > 20) then      ' In case of multiple errors
           temp = Man_Synchro()         ' Try to synchronize again
          'Man_Receive_Init()          ' Alternative, try to Initialize
Receiver again
            ErrorCount = 0              ' Reset error counter
         end if
         else                           ' No error occured
          if (temp <> 0x0E) then      ' If "End" byte was received(see
Transmitter example)
            Lcd_Chr_CP(temp)   ' do not write received byte on Lcd
           end if
            Delay_ms(25)
       end if

    wend                  ' If "End" byte was received exit do loop
  wend
end.
```

The following code is code for the Manchester transmitter, it shows how to use the Manchester Library for transmitting data:

```
program Manchester_Transmitter

' Manchester module connections
dim MANRXPIN as sbit at PORTB.B0
    MANRXPIN_Direction as sbit at DDRB.B0
    MANTXPIN as sbit at PORTB.B1
    MANTXPIN_Direction as sbit at DDRB.B1
' End Manchester module connections

dim index, character as byte
    s1 as char[17]

main:
  s1 = "mikroElektronika"
  Man_Send_Init()                 ' Initialize transmitter

  while TRUE                       ' Endless loop
    Man_Send(0x0B)                ' Send "start" byte
    Delay_ms(100)                 ' Wait for a while
    character = s1[0]             ' Take first char from string
    index = 0                      ' Initialize index variable
```

```
        while (character <> 0)      ' String ends with zero
        Man_Send(character)       ' Send character
        Delay_ms(90)               ' Wait for a while
        Inc(index)                 ' Increment index variable
        character = s1[ index]     ' Take next char from string
      wend
      Man_Send(0x0E)               ' Send "end" byte
      Delay_ms(1000)
  wend
end.
```

Connection Example

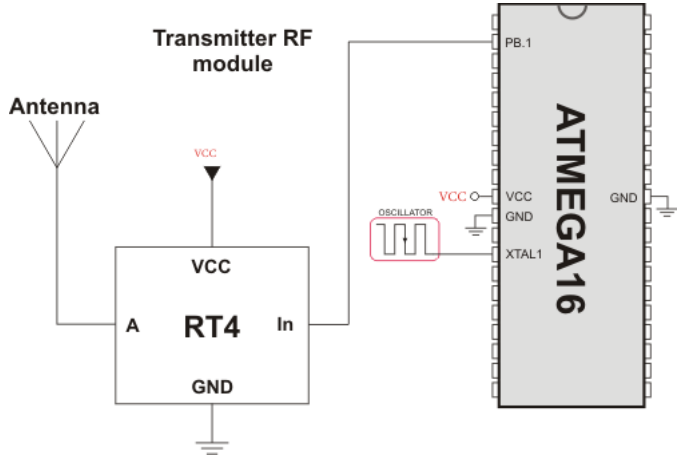

Simple Transmitter connection

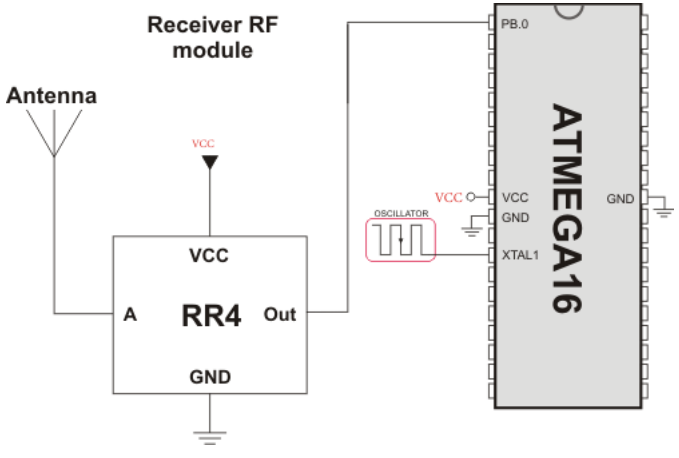

Simple Receiver connection

MULTI MEDIA CARD LIBRARY

The Multi Media Card (MMC) is a flash memory card standard. MMC cards are currently available in sizes up to and including 1 GB, and are used in cell phones, mp3 players, digital cameras, and PDA's.
mikroBasic PRO for AVR provides a library for accessing data on Multi Media Card via SPI communication.This library also supports SD(Secure Digital) memory cards.

Secure Digital Card

Secure Digital (SD) is a flash memory card standard, based on the older Multi Media Card (MMC) format.
SD cards are currently available in sizes of up to and including 2 GB, and are used in cell phones, mp3 players, digital cameras, and PDAs.

Notes:

- Routines for file handling can be used only with FAT16 file system.
- Library functions create and read files from the root directory only;
- Library functions populate both FAT1 and FAT2 tables when writing to files, but the file data is being read from the FAT1 table only; i.e. there is no recovery if FAT1 table is corrupted.
- Prior to calling any of this library routines, Spi_Rd_Ptr needs to be initialized with the appropriate SPI_Read routine.

External dependencies of MMC Library

The following variable must be defined in all projects using MMC library:	Description:	Example :
`dim Mmc_Chip_Select as sbit sfr external`	Chip select pin.	`dim Mmc_Chip_Select as sbit at PINB.B0`
`dim Mmc_Chip_Select_Direction as sbit sfr external`	Direction of the chip select pin.	`dim Mmc_Chip_Select_Direction as sbit at DDRB.B0`

Library Routines

- Mmc_Init
- Mmc_Read_Sector
- Mmc_Write_Sector
- Mmc_Read_Cid
- Mmc_Read_Csd

Routines for file handling:

- Mmc_Fat_Init
- Mmc_Fat_QuickFormat
- Mmc_Fat_Assign
- Mmc_Fat_Reset
- Mmc_Fat_Read
- Mmc_Fat_Rewrite
- Mmc_Fat_Append
- Mmc_Fat_Delete
- Mmc_Fat_Write
- Mmc_Fat_Set_File_Date
- Mmc_Fat_Get_File_Date
- Mmc_Fat_Get_File_Size
- Mmc_Fat_Get_Swap_File

Mmc_Init

Prototype	`sub function Mmc_Init() as byte`
Returns	- `0` - if MMC/SD card was detected and successfully initialized - `1` - otherwise
Description	Initializes MMC through hardware SPI interface. Parameters: - `port:` chip select signal port address. - `cspin:` chip select pin.
Requires	Global variables : - `Mmc_Chip_Select:` Chip Select line - `Mmc_Chip_Select_Direction:` Direction of the Chip Select pin must be defined before using this function. The appropriate hardware SPI module must be previously initialized. See the SPI1_Init, SPI1_Init_Advanced routines.

Example	`' MMC module connections`
	`dim Mmc_Chip_Select as sbit sfr at PORTB.B2`
	`dim Mmc_Chip_Select_Direction as sbit sfr at DDRB.B2`
	`' MMC module connections`
	
	`error = Mmc_Init()  ' Init with CS line at PORTB.B2`
	`dim i as byte`
	`...`
	`SPI1_Init_Advanced(_SPI_MASTER, _SPI_FCY_DIV2, _SPI_CLK_LO_LEAD-ING)`
	`Spi_Rd_Ptr = @SPI1_Read    // Pass pointer to SPI Read function of used SPI module`
	`i = Mmc_Init()`

Mmc_Read_Sector

Prototype	`sub function Mmc_Read_Sector(dim sector as longint, dim byref data as byte[ 512] ) as byte`
Returns	- `0` - if reading was successful - `1` - if an error occurred
Description	The function reads one sector (512 bytes) from MMC card. Parameters: - `sector:` MMC/SD card sector to be read. - `dbuff:` buffer of minimum 512 bytes in length for data storage.
Requires	MMC/SD card must be initialized. See Mmc_Init.

Example	`' read sector 510 of the MMC/SD card`
	`dim error as word`
	`  sectorNo as longword`
	`  dataBuffer as char[ 512]`
	`...`
	
	`main:`
	`  ...`
	`  sectorNo = 510`
	`  error = Mmc_Read_Sector(sectorNo, dataBuffer)`
	`  ...`
	`end.`

Mmc_Write_Sector

Prototype	`sub function Mmc_Write_Sector(dim sector as longint, dim byref data_ as byte[ 512] ) as byte`
Returns	- 0 - if writing was successful - 1 - if there was an error in sending write command - 2 - if there was an error in writing (data rejected)
Description	The function writes 512 bytes of data to one MMC card sector. Parameters: - sector: MMC/SD card sector to be written to. - dbuff: data to be written (buffer of minimum 512 bytes in length).
Requires	MMC/SD card must be initialized. See Mmc_Init.

Example	`' write to sector 510 of the MMC/SD card`
	`dim error as word`
	`  sectorNo as longword`
	`  dataBuffer as char[ 512]`
	`...`
	
	`main:`
	`  ...`
	`  sectorNo = 510`
	`  error = Mmc_Write_Sector(sectorNo, dataBuffer)`
	`  ...`
	`end.`

Mmc_Read_Cid

Prototype	`sub function Mmc_Read_Cid(dim byref data_cid as byte[ 16] ) as byte`
Returns	- 0 - if CID register was read successfully - 1 - if there was an error while reading
Description	The function reads 16-byte CID register. Parameters: - data_cid: buffer of minimum 16 bytes in length for storing CID register content.
Requires	MMC/SD card must be initialized. See Mmc_Init.

Example	`dim error as word`
	`  dataBuffer as byte[ 16]`
	`...`
	`main:`
	`  ...`
	`  error = Mmc_Read_Cid(dataBuffer)`
	`  ...`
	`end.`

Mmc_Read_Csd

Prototype	`sub function Mmc_Read_Csd(dim byref data_for_registers as byte[ 16] ) as byte`
Returns	- 0 - if CSD register was read successfully - 1 - if there was an error while reading
Description	The function reads 16-byte CSD register. Parameters: - data_csd: buffer of minimum 16 bytes in length for storing CSD register content.
Requires	MMC/SD card must be initialized. See Mmc_Init.

Example	`dim error as word`
	`  dataBuffer  as char[ 16]`
	`...`
	`main:`
	`  ...`
	`  error = Mmc_Read_Csd(dataBuffer)`
	`  ...`
	`end.`

Mmc_Fat_Init

Prototype	`sub function Mmc_Fat_Init() as byte`
Returns	- `0` - if MMC/SD card was detected and successfully initialized - `1` - if FAT16 boot sector was not found - `255` - if MMC/SD card was not detected
Description	Initializes MMC/SD card, reads MMC/SD FAT16 boot sector and extracts necessary data needed by the library. **Note:** MMC/SD card has to be formatted to FAT16 file system.
Requires	- `Mmc_Chip_Select:` Chip Select line - `Mmc_Chip_Select_Direction:` Direction of the Chip Select pin must be defined before using this function. The appropriate hardware SPI module must be previously initialized. See the SPI1_Init, SPI1_Init_Advanced routines.

Example	`' init the FAT library`
	
	`if (Mmc_Fat_Init() = 0) then`
	`...`
	`end if`

Mmc_Fat_QuickFormat

Prototype	`sub function Mmc_Fat_QuickFormat(dim mmc_fat_label as string[ 11] ) as byte`
Returns	- `0` - if MMC/SD card was detected, successfully formated and initialized - `1` - if FAT16 format was unseccessful - `255` - if MMC/SD card was not detected
Description	Formats to FAT16 and initializes MMC/SD card. Parameters: - `mmc_fat_label:` volume label (11 characters in length). If less than 11 characters are provided, the label will be padded with spaces. If null string is passed volume will not be labeled **Note:** This routine can be used instead or in conjunction with Mmc_Fat_Init routine. **Note:** If MMC/SD card already contains a valid boot sector, it will remain unchanged (except volume label field) and only FAT and ROOT tables will be erased. Also, the new volume label will be set.
Requires	The appropriate hardware SPI module must be previously initialized.

Example	`' format and initialize the FAT library`
	`if (Mmc_Fat_QuickFormat('mikroE') = 0) then`
	`  ...`
	`end if`

Mmc_Fat_Assign

Prototype	`sub function Mmc_Fat_Assign(dim byref filename as char[12], dim file_cre_attr as byte) d`
Returns	- `1` - if file already exists or file does not exist but a new file is created. - `0` - if file does not exist and no new file is created.
Description	Assigns file for file operations (read, write, delete...). All subsequent file operations will be applied on an assigned file. Parameters: - `filename:` name of the file that should be assigned for file operations. File name should be in DOS 8.3 (file_name.extension) format. The file name and extension will be automatically padded with spaces by the library if they have less than length required (i.e. "mikro.tx" -> "mikro .tx "), so the user does no have to take care of that. The file name and extension are case insensitive. The library will convert them to proper case automatically, so the user does not have to take care of that. Also, in order to keep backward compatibility with the first version of this library, file names can be entered as UPPERCASE string of 11 bytes in length with no dot character between file name and extension (i.e. "MIKROELETXT" -> MIKROELE.TXT). In this case last 3 characters of the string are considered to be file extension. - `file_cre_attr:` file creation and attributs flags. Each bit corresponds to the appropriate file attribut:

Bit	Mask	Description
0	0x01	Read Only
1	0x02	Hidden
2	0x04	System
3	0x08	Volume Label
4	0x10	Subdirectory
5	0x20	Archive
6	0x40	Device (internal use only, never found on disk)
7	0x80	File creation flag. If the file does not exist and this flag is set, a new file with specified name will be created.

	Note: Long File Names (LFN) are not supported.
Requires	MMC/SD card and MMC library must be initialized for file operations. See Mmc_Fat_Init.
Example	`' create file with archive attribut if it does not already exist` `Mmc_Fat_Assign("MIKRO007.TXT",0xA0)`

Mmc_Fat_Reset

Prototype	`sub procedure Mmc_Fat_Reset(dim byref size as longword)`
Returns	Nothing.
Description	Opens currently assigned file for reading. Parameters: - `size:` buffer to store file size to. After file has been open for reading its size is returned through this parameter.
Requires	MMC/SD card and MMC library must be initialized for file operations. See Mmc_Fat_Init. The file must be previously assigned. See Mmc_Fat_Assign.

Example	`dim size as longword`
	`...`
	`main:`
	`  ...`
	`  Mmc_Fat_Reset(size)`
	`  ...`
	`end.`

Mmc_Fat_Read

Prototype	`sub procedure Mmc_Fat_Read(dim byref bdata as byte)`
Returns	Nothing.
Description	Reads a byte from the currently assigned file opened for reading. Upon function execution file pointers will be set to the next character in the file. Parameters: - `bdata:` buffer to store read byte to. Upon this function execution read byte is returned through this parameter.
Requires	MMC/SD card and MMC library must be initialized for file operations. See Mmc_Fat_Init. The file must be previously assigned. See Mmc_Fat_Assign. The file must be opened for reading. See Mmc_Fat_Reset.

Example	`dim character as byte`
	`...`
	`main:`
	`  ...`
	`  Mmc_Fat_Read(character)`
	`  ...`
	`end.`

Mmc_Fat_Rewrite

Prototype	`sub procedure Mmc_Fat_Rewrite()`
Returns	Nothing.
Description	Opens the currently assigned file for writing. If the file is not empty its content will be erased.
Requires	MMC/SD card and MMC library must be initialized for file operations. See Mmc_Fat_Init. The file must be previously assigned. See Mmc_Fat_Assign.
Example	`' open file for writing` `Mmc_Fat_Rewrite()`

Mmc_Fat_Append

Prototype	`sub procedure Mmc_Fat_Append()`
Returns	Nothing.
Description	Opens the currently assigned file for appending. Upon this function execution file pointers will be positioned after the last byte in the file, so any subsequent file write operation will start from there.
Requires	MMC/SD card and MMC library must be initialized for file operations. See Mmc_Fat_Init. The file must be previously assigned. See Mmc_Fat_Assign.
Example	`' open file for appending` `Mmc_Fat_Append()`

Mmc_Fat_Delete

Prototype	`sub procedure Mmc_Fat_Delete()`
Returns	Nothing.
Description	Deletes currently assigned file from MMC/SD card.
Requires	MMC/SD card and MMC library must be initialized for file operations. See Mmc_Fat_Init. The file must be previously assigned. See Mmc_Fat_Assign.
Example	`' delete current file` `Mmc_Fat_Delete()`

Mmc_Fat_Write

Prototype	`sub procedure Mmc_Fat_Write(dim byref fdata as byte[ 512], dim data_len as word)`
Returns	Nothing.
Description	Writes requested number of bytes to the currently assigned file opened for writing. Parameters: - `fdata:` data to be written. - `data_len:` number of bytes to be written.
Requires	MMC/SD card and MMC library must be initialized for file operations. See Mmc_Fat_Init. The file must be previously assigned. See Mmc_Fat_Assign. The file must be opened for writing. See Mmc_Fat_Rewrite or Mmc_Fat_Append.

Example	`dim file_contents as char[ 42]`
	`...`
	`main:`
	`  ...`
	`  Mmc_Fat_Write(file_contents, 42) ' write data to the assigned file`
	`  ...`
	`end.`

Mmc_Fat_Set_File_Date

Prototype	`sub procedure Mmc_Fat_Set_File_Date(dim year as word, dim month, day, hours, mins, seconds as byte)`
Returns	Nothing.
Description	Sets the date/time stamp. Any subsequent file write operation will write this stamp to the currently assigned file's time/date attributs. Parameters: - `year:` year attribute. Valid values: 1980-2107 - `month:` month attribute. Valid values: 1-12 - `day:` day attribute. Valid values: 1-31 - `hours:` hours attribute. Valid values: 0-23 - `mins:` minutes attribute. Valid values: 0-59 - `seconds:` seconds attribute. Valid values: 0-59
Requires	MMC/SD card and MMC library must be initialized for file operations. See Mmc_Fat_Init. The file must be previously assigned. See Mmc_Fat_Assign. The file must be opened for writing. See Mmc_Fat_Rewrite or Mmc_Fat_Append.
Example	`Mmc_Fat_Set_File_Date(2005,9,30,17,41,0)`

Mmc_Fat_Get_File_Date

Prototype	`sub procedure Mmc_Fat_Get_File_Date(dim byref year as word, dim byref month, day, hours, mins as byte)`
Returns	Nothing.
Description	Reads time/date attributes of the currently assigned file. Parameters: - `year:` buffer to store year attribute to. Upon function execution year attribute is returned through this parameter. - `month:` buffer to store month attribute to. Upon function execution month attribute is returned through this parameter. - `day:` buffer to store day attribute to. Upon function execution day attribute is returned through this parameter. - `hours:` buffer to store hours attribute to. Upon function execution hours attribute is returned through this parameter. - `mins:` buffer to store minutes attribute to. Upon function execution minutes attribute is returned through this parameter.
Requires	MMC/SD card and MMC library must be initialized for file operations. See Mmc_Fat_Init. The file must be previously assigned. See Mmc_Fat_Assign.

Example	`dim year as word`
	`  month, day, hours, mins as byte`
	`...`
	`main:`
	`  ...`
	`  Mmc_Fat_Get_File_Date(year, month, day, hours, mins)`
	`  ...`
	`end.`

Mmc_Fat_Get_File_Size

Prototype	`sub function Mmc_Fat_Get_File_Size() as longword`
Returns	Size of the currently assigned file in bytes.
Description	This function reads size of the currently assigned file in bytes.
Requires	MMC/SD card and MMC library must be initialized for file operations. See Mmc_Fat_Init. The file must be previously assigned. See Mmc_Fat_Assign.

Example	`dim my_file_size as longword`
	`...`
	`main:`
	`  ...`
	`  my_file_size = Mmc_Fat_Get_File_Size`
	`  ...`
	`end.`

Mmc_Fat_Get_Swap_File

Prototype	`sub function Mmc_Fat_Get_Swap_File(dim sectors_cnt as longint, dim byref filename as string[11], dim file_attr as byte) as dword`
Returns	- Number of the start sector for the newly created swap file, if there was enough free space on the MMC/SD card to create file of required size. - `0` - otherwise.
Description	This function is used to create a swap file of predefined name and size on the MMC/SD media. If a file with specified name already exists on the media, search for consecutive sectors will ignore sectors occupied by this file. Therefore, it is recommended to erase such file if it already exists before calling this function. If it is not erased and there is still enough space for a new swap file, this function will delete it after allocating new memory space for a new swap file. The purpose of the swap file is to make reading and writing to MMC/SD media as fast as possible, by using the Mmc_Read_Sector() and Mmc_Write_Sector() functions directly, without potentially damaging the FAT system. The swap file can be considered as a "window" on the media where the user can freely write/read data. It's main purpose in the mikroBasic PRO for AVR's library is to be used for fast data acquisition; when the time-critical acquisition has finished, the data can be re-written into a "normal" file, and formatted in the most suitable way. Parameters: - `sectors_cnt:` number of consecutive sectors that user wants the swap file to have. - `filename:` name of the file that should be assigned for file operations. File name should be in DOS 8.3 (file_name.extension) format. The file name and extension will be automatically padded with spaces by the library if they have less than length required (i.e. "mikro.tx" -> "mikro .tx "), so the user does no have to take care of that. The file name and extension are case insensitive. The library will convert them to proper case automatically, so the user does not have to take care of that. Also, in order to keep backward compatibility with the first version of this library, file names can be entered as UPPERCASE string of 11 bytes in length with no dot character between file name and extension (i.e. "MIKROELETXT" -> MIKROELE.TXT). In this case last 3 characters of the string are considered to be file extension. - `file_attr:` file creation and attributs flags. Each bit corresponds to the appropriate file attribut:

Description

Bit	Mask	Description
0	0x01	Read Only
1	0x02	Hidden
2	0x04	System
3	0x08	Volume Label
4	0x10	Subdirectory
5	0x20	Archive
6	0x40	Device (internal use only, never found on disk)
7	0x80	Not used

Note: Long File Names (LFN) are not supported.

Requires

MMC/SD card and MMC library must be initialized for file operations. See Mmc_Fat_Init.

Example

```
'-------------- Try to create a swap file with archive atribute,
whose size will be at least 1000 sectors.
'                If it succeeds, it sends No. of start sector
over UART
dim size as longword
...
main:
  ...
  size = Mmc_Fat_Get_Swap_File(1000, "mikroE.txt", 0x20)
  if size then
    UART1_Write(0xAA)
    UART1_Write(Lo(size))
    UART1_Write(Hi(size))
    UART1_Write(Higher(size))
    UART1_Write(Highest(size))
    UART1_Write(0xAA
    end if
  ...
end.
```

Library Example

The following example demonstrates MMC library test. Upon flashing, insert a MMC/SD card into the module, when you should receive the "Init-OK" message. Then, you can experiment with MMC read and write functions, and observe the results through the Usart Terminal.

```
' if defined, we have a debug messages on PC terminal
program MMC_Test

{ $DEFINE RS232_debug}

dim MMC_chip_select as sbit at PORTB.B2
dim MMC_chip_select_direction as sbit at DDRB.B2

' universal variables
dim  k, i as word ' universal for loops and other stuff

' Variables for MMC routines
  dData as byte[ 512]   ' Buffer for MMC sector reading/writing
  data_for_registers as byte[ 16]  ' buffer for CID and CSD registers

' Display byte in hex
sub procedure printhex(dim i as byte)
dim bHi, bLo as byte
  bHi = i and 0xF0                ' High nibble
  bHi = bHi >> 4
  bHi = bHi + "0"
  if (bHi>"9") then
    bHi = bHi + 7
  end if
  bLo = (i and 0x0F) + "0"        ' Low nibble
  if (bLo>"9") then
    bLo = bLo+7
  end if
  UART1_Write(bHi)
  UART1_Write(bLo)
end sub

main:
  DDRC = 255
  PORTC = 0
  { $IFDEF RS232_debug}
    UART1_Init(19200)
  { $ENDIF}

  Delay_ms(10)
  DDRA = 255
  PORTA = 1
```

```
{$IFDEF RS232_debug}
    UART1_Write_Text("AVR-Started") ' If AVR present report
    UART1_Write(13)
    UART1_Write(10)
  {$ENDIF}

  ' Beffore all, we must initialise a MMC card
   SPI1_Init_Advanced(_SPI_MASTER, _SPI_FCY_DIV2, _SPI_CLK_LO_LEAD-
ING)
  Spi_Rd_Ptr = @SPI1_Read

  i = Mmc_Init()
  PORTC = i
  {$IFDEF RS232_debug}
    if(i = 0) then
      UART1_Write_Text("MMC Init-OK") ' If MMC present report
      UART1_Write(13)
      UART1_Write(10)
    end if
    if(i) then
      UART1_Write_Text("MMC Init-error") ' If error report
      UART1_Write(13)
      UART1_Write(10)
    end if
  {$ENDIF}

  for i=0 to 511
    dData[i] = "E" ' Fill MMC buffer with same characters
  next i
  i = Mmc_Write_Sector(55, dData)

  {$IFDEF RS232_debug}
  if(i = 0) then
    UART1_Write_Text("Write-OK")
  else  ' if there are errors.....
    UART1_Write_Text("Write-Error")
  end if
  UART1_Write(13)
  UART1_Write(10)
  {$ENDIF}

 ' Reading of CID and CSD register on MMC card.....
  {$IFDEF RS232_debug}
  i = Mmc_Read_Cid(data_for_registers)
  if (i = 0) then
    for k=0 to 15
      printhex(data_for_registers[k])
      if(k <> 15) then
        UART1_Write("-")
```

```
      end if
    next k
      UART1_Write(13)
  else
    UART1_Write_Text("CID-error")
  end if
    i = Mmc_Read_Csd(data_for_registers)
    if(i = 0) then
      for k=0 to 15
        printhex(data_for_registers[ k] )
        if(k <> 15) then
          UART1_Write("-")
        end if
      next K
      UART1_Write(13)
      UART1_Write(10)
    else
        UART1_Write_Text("CSD-error")
    end if
  {$ENDIF}
end.
```

Following example consists of several blocks that demonstrate various aspects of usage of the Mmc_Fat16 library. These are:

- Creation of new file and writing down to it.
- Opening existing file and re-writing it (writing from start-of-file).
- Opening existing file and appending data to it (writing from end-of-file).
- Opening a file and reading data from it (sending it to USART terminal).
- Creating and modifying several files at once.

```
Program MMC_FAT_Test

dim
  Mmc_Chip_Select as sbit at PORTG.B1
  Mmc_Chip_Select_Direction as sbit at DDRG.B1

dim
  FAT_TXT as string[ 20]
  file_contents as string[ 50]

  filename as string[ 14]  ' File names

  character as byte
  loop_, loop2 as byte
  size as longint

  buffer as byte[ 512]
```

```
'-------------- Writes string to USART
sub procedure Write_Str(dim byref ostr as byte[ 2] )
dim
  i as byte
  i = 0
  while ostr[ i] <> 0
    UART1_Write (ostr[ i] )
    Inc(i)
  wend
  UART1_Write($0A)
end sub'~

'-------------- Creates new file and writes some data to it
sub procedure Create_New_File
  filename[ 7] = "A"                  ' Set filename for single-file
tests
  Mmc_Fat_Assign(filename, 0xA0)    ' Will not find file and then cre-
ate file
  Mmc_Fat_Rewrite                     ' To clear file and start with
new data
  for loop_ = 1 to 99                 '  We want 5 files on the MMC
card
    UART1_Write(".")
    file_contents[ 0] = loop_ div 10 + 48
    file_contents[ 1] = loop_ mod 10 + 48
    Mmc_Fat_Write(file_contents, 42)    ' write data to the assigned
file
  next loop_
end sub'~

'-------------- Creates many new files and writes data to them
sub procedure Create_Multiple_Files
  for loop2 = "B" to "Z"
    UART1_Write(loop2)                    ' this line can slow down
the performance
    filename[ 7] = loop2                ' set filename
    Mmc_Fat_Assign(filename, 0xA0)      ' find existing file or cre-
ate a new one
    Mmc_Fat_Rewrite                       ' To clear file and start
with new data
    for loop_ = 1 to 44
      file_contents[ 0] = byte(loop_ div 10 + 48)
      file_contents[ 1] = byte(loop_ mod 10 + 48)
      Mmc_Fat_Write(file_contents, 42) ' write data to the assigned
file
    next loop_
  next loop2
end sub'~
```

```
'-------------- Opens an existing file and rewrites it
sub procedure Open_File_Rewrite
  filename[ 7] = "C"          ' Set filename for single-file tests
  Mmc_Fat_Assign(filename, 0)
  Mmc_Fat_Rewrite
  for loop_ = 1 to 55
    file_contents[ 0] = byte(loop_ div 10 + 48)
    file_contents[ 1] = byte(loop_ mod 10 + 48)
     Mmc_Fat_Write(file_contents, 42) ' write data to the assigned
file
  next loop_
end sub'~

'-------------- Opens an existing file and appends data to it
'               (and alters the date/time stamp)
sub procedure Open_File_Append
   filename[ 7] = "B"
   Mmc_Fat_Assign(filename, 0)
   Mmc_Fat_Set_File_Date(2005,6,21,10,35,0)
   Mmc_Fat_Append()                  ' Prepare file for append
   file_contents = " for mikroElektronika 2007"      ' Prepare file
for append
   file_contents[ 26] = 10              ' LF
   Mmc_Fat_Write(file_contents, 27) ' Write data to assigned file
end sub'~

'-------------- Opens an existing file, reads data from it and puts
it to USART
sub procedure Open_File_Read

  filename[ 7] = "B"
  Mmc_Fat_Assign(filename, 0)
  Mmc_Fat_Reset(size)                     ' To read file, sub proce-
dure returns size of file
  while size > 0
    Mmc_Fat_Read(character)
    UART1_Write(character)            ' Write data to USART
    Dec(size)
  wend
end sub'~

'-------------- Deletes a file. If file doesn"t exist, it will first
be created
'               and then deleted.
sub procedure Delete_File
  filename[ 7] = "F"
  Mmc_Fat_Assign(filename, 0)
  Mmc_Fat_Delete
end sub'~
```

```
'-------------- Tests whether file exists, and if so sends its cre-
ation date
'                and file size via USART
sub procedure Test_File_Exist
dim
  fsize as longint
  year as word
  month_, day, hour_, minute_ as byte
  outstr as byte[ 12]

  filename[ 7]  = "B"
  if Mmc_Fat_Assign(filename, 0) <> 0 then
    '--- file has been found - get its date
    Mmc_Fat_Get_File_Date(year,month_,day,hour_,minute_)
    WordToStr(year, outstr)
    Write_Str(outstr)
    ByteToStr(month_, outstr)
    Write_Str(outstr)
    WordToStr(day, outstr)
    Write_Str(outstr)
    WordToStr(hour_, outstr)
    Write_Str(outstr)
    WordToStr(minute_, outstr)
    Write_Str(outstr)
    '--- get file size
    fsize = Mmc_Fat_Get_File_Size
    LongIntToStr(fsize, outstr)
    Write_Str(outstr)
  else
    '--- file was not found - signal it
    UART1_Write(0x55)
    Delay_ms(1000)
    UART1_Write(0x55)
  end if
end sub'~

'-------------- Tries to create a swap file, whose size will be at
least 100
'                sectors (see Help for details)
sub procedure M_Create_Swap_File()
  dim  i as word

    for i=0 to 511
      Buffer[ i]  = i
    next i

  size = Mmc_Fat_Get_Swap_File(5000, "mikroE.txt", 0x20)   ' see help
on this sub function for details
```

```
 if (size <> 0) then
       LongIntToStr(size, fat_txt)
       UART1_Write_Text(fat_txt)

       for i=0 to 4999
         Mmc_Write_Sector(size, Buffer)
         size = size + 1
         UART1_Write(".")
       next i
     end if
end sub

'-------------- Main. Uncomment the sub function(s) to test the
desired operation(s)
main:
  FAT_TXT = "FAT16 not found"
  file_contents = "XX MMC/SD FAT16 library by Anton Rieckert#"
  file_contents[ 41] = 10           ' newline
  filename = "MIKRO00xTXT"

  ' we will use PORTC to signal test end
  DDRC  = 0xFF
  PORTC = 0
  UART1_Init(19200)
  'delay_ms(100)              ' Set up USART for file reading
  UART1_Write_Text("Start")
  '--- Init the FAT library
  SPI1_Init_Advanced(_SPI_MASTER, _SPI_FCY_DIV128, _SPI_CLK_LO_LEADING)
  Spi_Rd_Ptr = @SPI1_Read
  ' use fat16 quick format instead of init routine if a formatting
is needed
  if Mmc_Fat_Init() = 0 then
     PORTC = 0xF0
     ' reinitialize spi at higher speed
    SPI1_Init_Advanced(_SPI_MASTER, _SPI_FCY_DIV2, _SPI_CLK_LO_LEADING)
     '--- signal start-of-test
     '--- test sub functions
     Create_New_File
     Create_Multiple_Files

     Open_File_Rewrite
     Open_File_Append
     Open_File_Read
     Delete_File
     Test_File_Exist
     M_Create_Swap_File()
     UART1_Write("e")
  else
     UART1_Write_Text(FAT_TXT)
  end if
  '--- signal end-of-test
  PORTC  = $0F
  UART1_Write_Text("End")
end.'~!
```

HW Connection

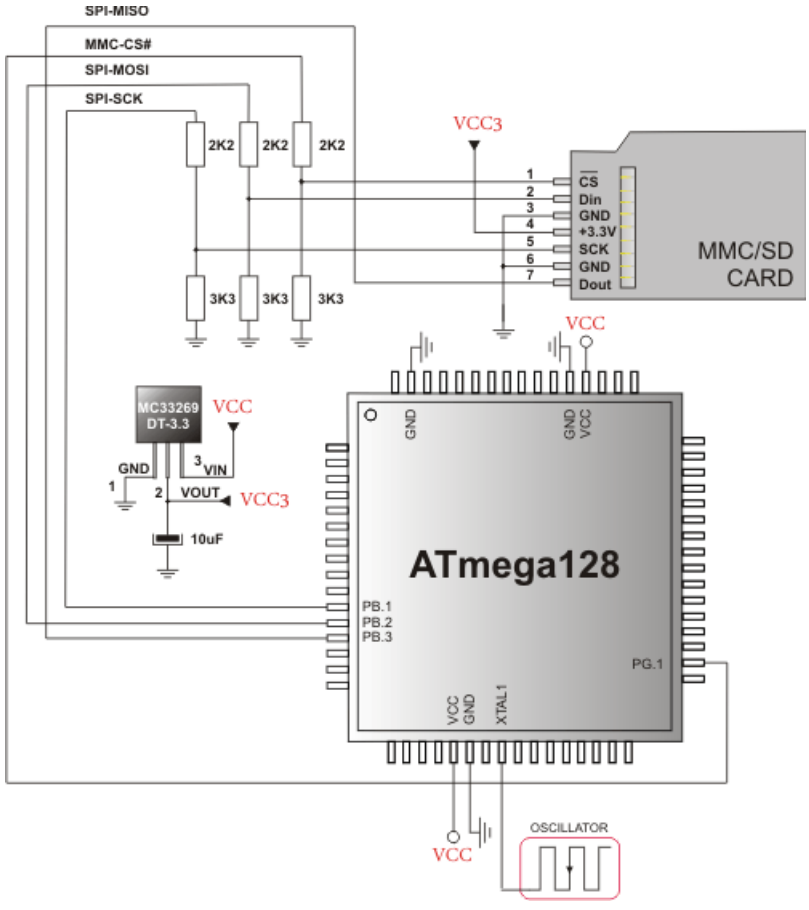

Pin diagram of MMC memory card

ONEWIRE LIBRARY

The OneWire library provides routines for communication via the Dallas OneWire protocol, e.g. with DS18x20 digital thermometer. OneWire is a Master/Slave protocol, and all communication cabling required is a single wire. OneWire enabled devices should have open collector drivers (with single pull-up resistor) on the shared data line.

Slave devices on the OneWire bus can even get their power supply from data line. For detailed schematic see device datasheet.

Some basic characteristics of this protocol are:

- single master system,
- low cost,
- low transfer rates (up to 16 kbps),
- fairly long distances (up to 300 meters),
- small data transfer packages.

Each OneWire device has also a unique 64-bit registration number (8-bit device type, 48-bit serial number and 8-bit CRC), so multiple slaves can co-exist on the same bus.

Note: Oscillator frequency Fosc needs to be at least 8MHz in order to use the routines with Dallas digital thermometers.

External dependencies of OneWire Library

This variable must be defined in any project that is using OneWire Library:	Description:	Example :
`dim OW_Bit_Read as sbit sfr external`	OneWire read line.	`dim OW_Bit_Read as sbit at PINB.B2`
`dim OW_Bit_Write as sbit sfr external`	OneWire write line.	`dim OW_Bit_Write as sbit at PORTB.B2`
`dim OW_Bit_Direction as sbit sfr external`	Direction of the OneWire pin.	`dim OW_Bit_Direction as sbit at DDRB.B2`

Library Routines

- Ow_Reset
- Ow_Read
- Ow_Write

Ow_Reset

Prototype	`sub function Ow_Reset() as word`
Returns	- 0 if the device is present - 1 if the device is not present
Description	Issues OneWire reset signal for DS18x20. Parameters : - None.
Requires	Devices compliant with the Dallas OneWire protocol. Global variables : - `OW_Bit_Read:` OneWire read line - `OW_Bit_Write:` OneWire write line. - `OW_Bit_Direction:` Direction of the OneWire pin must be defined before using this function.

Example	`' OneWire pinout`
	`dim OW_Bit_Read as sbit at PINB.B2`
	`dim OW_Bit_Write as sbit at PORTB.B2`
	`dim OW_Bit_Direction as sbit at DDRB.B2`
	`' end of OneWire pinout`
	
	`' Issue Reset signal on One-Wire Bus`
	`Ow_Reset()`

Ow_Read

Prototype	`sub function Ow_Read() as byte`
Returns	Data read from an external device over the OneWire bus.
Description	Reads one byte of data via the OneWire bus.
Requires	Devices compliant with the Dallas OneWire protocol. Global variables : - `OW_Bit_Read:` OneWire read line - `OW_Bit_Write:` OneWire write line. - `OW_Bit_Direction:` Direction of the OneWire pin must be defined before using this function.

Example	`// OneWire pinout`
	`dim OW_Bit_Read as sbit at PINB.B2`
	`dim OW_Bit_Write as sbit at PORTB.B2`
	`dim OW_Bit_Direction as sbit at DDRB.B2`
	`// end of OneWire pinout`
	
	`' Read a byte from the One-Wire Bus`
	`dim read_data as byte`
	`...`
	`read_data = Ow_Read()`

Ow_Write

Prototype	`sub procedure Ow_Write(dim par as byte)`
Returns	Nothing.
Description	Writes one byte of data via the OneWire bus. Parameters : - `par:` data to be written
Requires	Devices compliant with the Dallas OneWire protocol. Global variables : - `OW_Bit_Read:` OneWire read line - `OW_Bit_Write:` OneWire write line. - `OW_Bit_Direction:` Direction of the OneWire pin must be defined before using this function.

Example	`// OneWire pinout`
	`dim OW_Bit_Read as sbit at PINB.B2`
	`dim OW_Bit_Write as sbit at PORTB.B2`
	`dim OW_Bit_Direction as sbit at DDRB.B2`
	`// end of OneWire pinout`
	
	`' Send a byte to the One-Wire Bus`
	`Ow_Write(0xCC)`

Library Example

This example reads the temperature using DS18x20 connected to pin PORTB.2. After reset, MCU obtains temperature from the sensor and prints it on the Lcd. Make sure to pull-up PORTB.2 line and to turn off the PORTB leds.

```
program OneWire

' Lcd module connections
dim LCD_RS as sbit at PORTD.B2
    LCD_EN as sbit at PORTD.B3
    LCD_D4 as sbit at PORTD.B4
    LCD_D5 as sbit at PORTD.B5
    LCD_D6 as sbit at PORTD.B6
    LCD_D7 as sbit at PORTD.B7
    LCD_RS_Direction as sbit at DDRD.B2
    LCD_EN_Direction as sbit at DDRD.B3
    LCD_D4_Direction as sbit at DDRD.B4
    LCD_D5_Direction as sbit at DDRD.B5
    LCD_D6_Direction as sbit at DDRD.B6
    LCD_D7_Direction as sbit at DDRD.B7
' End Lcd module connections

' OneWire pinout
dim OW_Bit_Write as sbit at PORTB.B2
    OW_Bit_Read as sbit at PINB.B2
    OW_Bit_Direction as sbit at DDRB.B2
' end OneWire definition

'   Set TEMP_RESOLUTION to the corresponding resolution of used
DS18x20 sensor:
'  18S20: 9  (default setting can be 9,10,11,or 12)
'  18B20: 12
const TEMP_RESOLUTION as byte = 12

dim text as byte[ 9]
    temp as word

sub procedure Display_Temperature( dim temp2write as word )
const RES_SHIFT = TEMP_RESOLUTION - 8

dim temp_whole as byte
    temp_fraction as word

    text = "000.0000"
    ' check if temperature is negative
    if (temp2write and 0x8000) then
        text[ 0] = "-"
        temp2write = not temp2write + 1
    end if
```

```
' extract temp_whole
    temp_whole = word(temp2write >> RES_SHIFT)

    ' convert temp_whole to characters
    if ( temp_whole div 100 ) then
      text[ 0] = temp_whole div 100  + 48
    else
      text[ 0] = "0"
    end if

    text[ 1] = (temp_whole div 10)mod 10 + 48   ' Extract tens digit
    text[ 2] =  temp_whole mod 10         + 48 ' Extract ones digit

    ' extract temp_fraction and convert it to unsigned int
    temp_fraction  =  word(temp2write << (4-RES_SHIFT))
    temp_fraction  = temp_fraction and 0x000F
    temp_fraction  = temp_fraction *  625

    ' convert temp_fraction to characters
    text[ 4] = word(temp_fraction div 1000)    + 48         ' Extract
thousands digit
     text[ 5] = word((temp_fraction div 100)mod 10 + 48)           '
Extract hundreds digit
     text[ 6] = word((temp_fraction div 10)mod 10  + 48)           '
Extract tens digit
    text[ 7] = word(temp_fraction mod 10)      + 48         ' Extract
ones digit

    ' print temperature on Lcd
    Lcd_Out(2, 5, text)
end sub

main:
  text = "000.0000"
  UART1_Init(9600)
  Lcd_Init()                                          ' Initialize Lcd
  Lcd_Cmd(LCD_CLEAR)                                  ' Clear Lcd
  Lcd_Cmd(LCD_CURSOR_OFF)                             ' Turn cursor off
  Lcd_Out(1, 1, " Temperature:   ")
  ' Print degree character, "C" for Centigrades
   Lcd_Chr(2,13,178)   ' different Lcd displays have different char
code for degree
                        ' if you see greek alpha letter try typing
178 instead of 223
  Lcd_Chr(2,14,"C")

  '--- main loop
  while TRUE
```

```
    '--- perform temperature reading
         Ow_Reset()           ' Onewire reset signal
         Ow_Write(0xCC)       ' Issue command SKIP_ROM
         Ow_Write(0x44)       ' Issue command CONVERT_T
         Delay_us(120)

         Ow_Reset()
         Ow_Write(0xCC)       ' Issue command SKIP_ROM
         Ow_Write(0xBE)       ' Issue command READ_SCRATCHPAD

         temp =  Ow_Read()
         temp = (Ow_Read() << 8) + temp

         '--- Format and display result on Lcd

         Display_Temperature(temp)

         Delay_ms(520)
    wend
end.
```

HW Connection

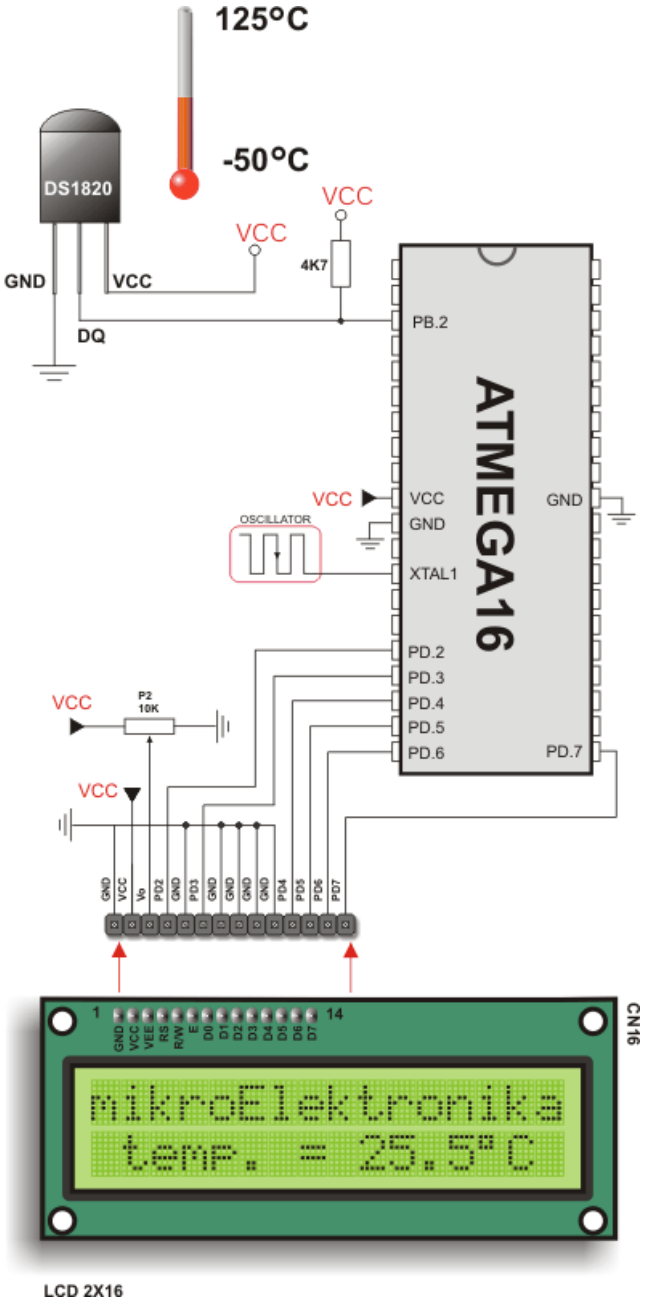

Example of DS1820 connection

PORT EXPANDER LIBRARY

The mikroBasic PRO for AVR provides a library for communication with the Microchip's Port Expander MCP23S17 via SPI interface. Connections of the AVR compliant MCU and MCP23S17 is given on the schematic at the bottom of this page.

Note: Library uses the SPI module for communication. The user must initialize SPI module before using the Port Expander Library.

Note: Prior to calling any of this library routines, Spi_Rd_Ptr needs to be initialized with the appropriate SPI_Read routine.

Note: Library does not use Port Expander interrupts.

External dependencies of Port Expander Library

The following variables must be defined in all projects using Port Expander Library:	Description:	Example :
`dim SPExpanderRST as sbit sfr external`	Reset line.	`dim SPExpanderRST as sbit at PORTB.B0`
`dim SPExpanderRST as sbit at PORTB.B0`	Chip Select line.	`dim SPExpanderCS as sbit at PORTB.B1`
`dim SPExpanderRST_Direction as sbit sfr external`	Direction of the Reset pin.	`dim SPExpanderRST_Direction as sbit at DDRB.B0`
`dim SPExpanderCS_Direction as sbit sfr external`	Direction of the Chip Select pin.	`dim SPExpanderCS_Directions as sbit at DDRB.B1`

Library Routines

- Expander_Init
- Expander_Read_Byte
- Expander_Write_Byte
- Expander_Read_PortA
- Expander_Read_PortB
- Expander_Read_PortAB
- Expander_Write_PortA
- Expander_Write_PortB

- Expander_Write_PortAB
- Expander_Set_DirectionPortA
- Expander_Set_DirectionPortB
- Expander_Set_DirectionPortAB
- Expander_Set_PullUpsPortA
- Expander_Set_PullUpsPortB
- Expander_Set_PullUpsPortAB

Expander_Init

Prototype	`sub procedure Expander_Init(dim ModuleAddress as byte)`
Returns	Nothing.
Description	Initializes Port Expander using SPI communication. Port Expander module settings : - hardware addressing enabled - automatic address pointer incrementing disabled (byte mode) - BANK_0 register adressing - slew rate enabled Parameters : - `ModuleAddress:` Port Expander hardware address, see schematic at the bottom of this page
Requires	Global variables : - `SPExpanderCS:` Chip Select line - `SPExpanderRST:` Reset line - `SPExpanderCS_Direction:` Direction of the Chip Select pin - `SPExpanderRST_Direction:` Direction of the Reset pin must be defined before using this function. SPI module needs to be initialized. See SPI1_Init and SPI1_Init_Advanced routines.

Example	`' port expander pinout definition`
	`dim SPExpanderCS as sbit at PORTB.B1`
	`SPExpanderRST as sbit at PORTB.B0`
	`SPExpanderCS_Direction as sbit at DDRB.B1`
	`SPExpanderRST_Direction as sbit at DDRB.B0`
	
	`...`
	`SPI1_Init()  ' initialize SPI module`
	`Spi_Rd_Ptr = @SPI1_Read  ' Pass pointer to SPI Read function of used SPI module`
	`Expander_Init(0)  ' initialize port expander`

Expander_Read_Byte

Prototype	`sub function Expander_Read_Byte(dim ModuleAddress as byte, dim RegAddress as byte) as byte`
Returns	Byte read.
Description	The function reads byte from Port Expander. Parameters : - `ModuleAddress:` Port Expander hardware address, see schematic at the bottom of this page - `RegAddress:` Port Expander's internal register address
Requires	Port Expander must be initialized. See Expander_Init.

Example	`' Read a byte from Port Expander's register`
	`dim read_data as byte`
	`...`
	`read_data = Expander_Read_Byte(0,1)`

Expander_Write_Byte

Prototype	`sub procedure Expander_Write_Byte(dim ModuleAddress as byte, dim RegAddress as byte, dim Data_ as byte)`
Returns	Nothing.
Description	Routine writes a byte to Port Expander. Parameters : - `ModuleAddress:` Port Expander hardware address, see schematic at the bottom of this page - `RegAddress:` Port Expander's internal register address - `Data_:` data to be written
Requires	Port Expander must be initialized. See Expander_Init.
Example	`' Write a byte to the Port Expander's register` `Expander_Write_Byte(0,1,0xFF)`

Expander_Read_PortA

Prototype	`sub function Expander_Read_PortA(dim ModuleAddress as byte) as byte`
Returns	Byte read.
Description	The function reads byte from Port Expander's PortA. Parameters : - `ModuleAddress:` Port Expander hardware address, see schematic at the bottom of this page
Requires	Port Expander must be initialized. See Expander_Init. Port Expander's PortA should be configured as input. See Expander_Set_DirectionPortA and Expander_Set_DirectionPortAB routines.

Example	`' Read a byte from Port Expander's PORTA`
	`dim read_data as byte`
	`...`
	`Expander_Set_DirectionPortA(0,0xFF)  ' set expander's porta to be input`
	`...`
	`read_data = Expander_Read_PortA(0)`

Expander_Read_PortB

Prototype	`sub function Expander_Read_PortB(dim ModuleAddress as byte) as byte`
Returns	Byte read.
Description	The function reads byte from Port Expander's PortB. Parameters : - `ModuleAddress:` Port Expander hardware address, see schematic at the bottom of this page
Requires	Port Expander must be initialized. See Expander_Init. Port Expander's PortB should be configured as input. See Expander_Set_DirectionPortB and Expander_Set_DirectionPortAB routines.

Example	`' Read a byte from Port Expander's PORTB`
	`dim read_data as byte`
	`...`
	`Expander_Set_DirectionPortB(0,0xFF)  ' set expander's portb to be input`
	`...`
	`read_data = Expander_Read_PortB(0)`

Expander_Read_PortAB

Prototype	`sub function Expander_Read_PortAB(dim ModuleAddress as byte) as word`
Returns	Word read.
Description	The function reads word from Port Expander's ports. PortA readings are in the higher byte of the result. PortB readings are in the lower byte of the result. Parameters : - `ModuleAddress:` Port Expander hardware address, see schematic at the bottom of this page
Requires	Port Expander must be initialized. See Expander_Init. Port Expander's PortA and PortB should be configured as inputs. See Expander_Set_DirectionPortA, Expander_Set_DirectionPortB and Expander_Set_DirectionPortAB routines.

Example	`' Read a byte from Port Expander's PORTA and PORTB`
	`dim read_data as word`
	`...`
	`Expander_Set_DirectionPortAB(0,0xFFFF)  ' set expander's porta and portb to be input`
	`...`
	`read_data = Expander_Read_PortAB(0)`

Expander_Write_PortA

Prototype	`sub procedure Expander_Write_PortA(dim ModuleAddress as byte, dim Data_ as byte)`
Returns	Nothing.
Description	The function writes byte to Port Expander's PortA. Parameters : - `ModuleAddress:` Port Expander hardware address, see schematic at the bottom of this page - `Data_:` data to be written
Requires	Port Expander must be initialized. See Expander_Init. Port Expander's PortA should be configured as output. See Expander_Set_DirectionPortA and Expander_Set_DirectionPortAB routines.

Example	`' Write a byte to Port Expander's PORTA`
	
	`...`
	`Expander_Set_DirectionPortA(0,0x00)  ' set expander's porta to be output`
	`...`
	`Expander_Write_PortA(0, 0xAA)`

Expander_Write_PortB

Prototype	`sub procedure Expander_Write_PortB(dim ModuleAddress as byte, dim Data_ as byte)`
Returns	Nothing.
Description	The function writes byte to Port Expander's PortB. Parameters : - `ModuleAddress:` Port Expander hardware address, see schematic at the bottom of this page - `Data_:` data to be written
Requires	Port Expander must be initialized. See Expander_Init. Port Expander's PortB should be configured as output. See Expander_Set_DirectionPortB and Expander_Set_DirectionPortAB routines.

Example	`' Write a byte to Port Expander's PORTB`
	
	`...`
	`Expander_Set_DirectionPortB(0,0x00)  ' set expander's portb to be output`
	`...`
	`Expander_Write_PortB(0, 0x55)`

Expander_Write_PortAB

Prototype	`sub procedure Expander_Write_PortAB(dim ModuleAddress as byte, dim Data_ as word)`
Returns	Nothing.
Description	The function writes word to Port Expander's ports. Parameters : - `ModuleAddress:` Port Expander hardware address, see schematic at the bottom of this page - `Data_:` data to be written. Data to be written to PortA are passed in `Data`'s higher byte. Data to be written to PortB are passed in `Data`'s lower byte
Requires	Port Expander must be initialized. See Expander_Init. Port Expander's PortA and PortB should be configured as outputs. See Expander_Set_DirectionPortA, Expander_Set_DirectionPortB and Expander_Set_DirectionPortAB routines.

Example	`' Write a byte to Port Expander's PORTA and PORTB`
	
	`...`
	`Expander_Set_DirectionPortAB(0,0x0000)  ' set expander's porta and portb to be output`
	`...`
	`Expander_Write_PortAB(0, 0xAA55)`

Expander_Set_DirectionPortA

Prototype	`sub procedure Expander_Set_DirectionPortA(dim ModuleAddress as byte, dim Data_ as byte)`
Returns	Nothing.
Description	The function sets Port Expander's PortA direction. Parameters : - `ModuleAddress:` Port Expander hardware address, see schematic at the bottom of this page - `Data_:` data to be written to the PortA direction register. Each bit corresponds to the appropriate pin of the PortA register. Set bit designates corresponding pin as input. Cleared bit designates corresponding pin as output.
Requires	Port Expander must be initialized. See Expander_Init.
Example	`' Set Port Expander's PORTA to be output` `Expander_Set_DirectionPortA(0,0x00)`

Expander_Set_DirectionPortB

Prototype	`sub procedure Expander_Set_DirectionPortB(dim ModuleAddress as byte, dim Data_ as byte)`
Returns	Nothing.
Description	The function sets Port Expander's PortB direction. Parameters : - `ModuleAddress:` Port Expander hardware address, see schematic at the bottom of this page - `Data_:` data to be written to the PortB direction register. Each bit corresponds to the appropriate pin of the PortB register. Set bit designates corresponding pin as input. Cleared bit designates corresponding pin as output.
Requires	Port Expander must be initialized. See Expander_Init.
Example	`' Set Port Expander's PORTB to be input` `Expander_Set_DirectionPortB(0,0xFF)`

Expander_Set_DirectionPortAB

Prototype	`sub procedure Expander_Set_DirectionPortAB(dim ModuleAddress as byte, dim Direction as word)`
Returns	Nothing.
Description	The function sets Port Expander's PortA and PortB direction. Parameters : - `ModuleAddress:` Port Expander hardware address, see schematic at the bottom of this page - `Direction:` data to be written to direction registers. Data to be written to the PortA direction register are passed in Direction's higher byte. Data to be written to the PortB direction register are passed in Direction's lower byte. Each bit corresponds to the appropriate pin of the PortA/PortB register. Set bit designates corresponding pin as input. Cleared bit designates corresponding pin as output.
Requires	Port Expander must be initialized. See Expander_Init.
Example	`' Set Port Expander's PORTA to be output and PORTB to be input` `Expander_Set_DirectionPortAB(0,0x00FF)`

Expander_Set_PullUpsPortA

Prototype	`sub procedure Expander_Set_PullUpsPortA(dim ModuleAddress as byte, dim Data_ as byte)`
Returns	Nothing.
Description	The function sets Port Expander's PortA pull up/down resistors. Parameters : - `ModuleAddress:` Port Expander hardware address, see schematic at the bottom of this page - `Data_:` data for choosing pull up/down resistors configuration. Each bit corresponds to the appropriate pin of the PortA register. Set bit enables pull-up for corresponding pin.
Requires	Port Expander must be initialized. See Expander_Init.
Example	`' Set Port Expander's PORTA pull-up resistors` `Expander_Set_PullUpsPortA(0, 0xFF)`

Expander_Set_PullUpsPortB

Prototype	`sub procedure Expander_Set_PullUpsPortB(dim ModuleAddress as byte, dim Data_ as byte)`
Returns	Nothing.
Description	The function sets Port Expander's PortB pull up/down resistors. Parameters : - `ModuleAddress:` Port Expander hardware address, see schematic at the bottom of this page - `Data_:` data for choosing pull up/down resistors configuration. Each bit corresponds to the appropriate pin of the PortB register. Set bit enables pull-up for corresponding pin.
Requires	Port Expander must be initialized. See Expander_Init.
Example	`' Set Port Expander's PORTB pull-up resistors` `Expander_Set_PullUpsPortB(0, 0xFF)`

Expander_Set_PullUpsPortAB

Prototype	`sub procedure Expander_Set_PullUpsPortAB(dim ModuleAddress as byte, dim PullUps as word)`
Returns	Nothing.
Description	The function sets Port Expander's PortA and PortB pull up/down resistors. Parameters : - `ModuleAddress:` Port Expander hardware address, see schematic at the bottom of this page - `PullUps:` data for choosing pull up/down resistors configuration. PortA pull up/down resistors configuration is passed in `PullUps`'s higher byte. PortB pull up/down resistors configuration is passed in `PullUps`'s lower byte. Each bit corresponds to the appropriate pin of the PortA/PortB register. Set bit enables pull-up for corresponding pin.
Requires	Port Expander must be initialized. See Expander_Init.
Example	`' Set Port Expander's PORTA and PORTB pull-up resistors` `Expander_Set_PullUpsPortAB(0, 0xFFFF)`

Library Example

The example demonstrates how to communicate with Port Expander MCP23S17.

Note that Port Expander pins A2 A1 A0 are connected to GND so Port Expander Hardware Address is 0.

```
program PortExpander

' Port Expander module connections
dim SPExpanderRST as sbit at PORTB.B0
    SPExpanderCS  as sbit at PORTB.B1
    SPExpanderRST_Direction as sbit at DDRB.B0
    SPExpanderCS_Direction  as sbit at DDRB.B1
' End Port Expander module connections

dim counter as byte' = 0

main:
  counter = 0
  DDRC = 0xFF                        ' Set PORTC as output

  ' If Port Expander Library uses SPI1 module
  SPI1_Init()      ' Initialize SPI module used with PortExpander
  Spi_Rd_Ptr = @SPI1_Read                ' Pass pointer to SPI Read
sub function of used SPI module

'  If Port Expander Library uses SPI2 module
'  SPI2_Init()     ' Initialize SPI module used with PortExpander
'  Spi_Rd_Ptr = @SPI2_Read                ' Pass pointer to SPI Read
sub function of used SPI module

  Expander_Init(0)                  ' Initialize Port Expander

  Expander_Set_DirectionPortA(0, 0x00) ' Set Expander"s PORTA to be
output

  Expander_Set_DirectionPortB(0,0xFF)   ' Set Expander"s PORTB to be
input
  Expander_Set_PullUpsPortB(0,0xFF)     ' Set pull-ups to all of the
Expander"s PORTB pins

  while  TRUE                           ' Endless loop
    Expander_Write_PortA(0, counter)    ' Write i to expander"s PORTA
    Inc(counter)
    PORTC = Expander_Read_PortB(0)      ' Read expander"s PORTB and
write it to LEDs
    Delay_ms(100)
  wend

end.
```

HW Connection

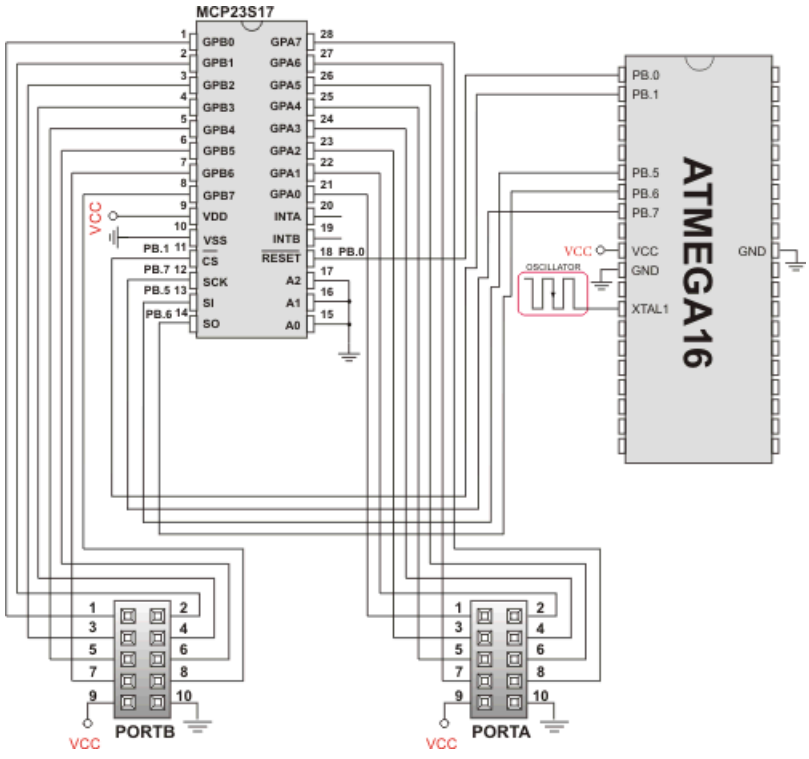

Port Expander HW connection

PS/2 LIBRARY

The mikroBasic PRO for AVR provides a library for communication with the common PS/2 keyboard.

Note: The library does not utilize interrupts for data retrieval, and requires the oscillator clock to be at least 6MHz.

Note: The pins to which a PS/2 keyboard is attached should be connected to the pull-up resistors.

Note: Although PS/2 is a two-way communication bus, this library does not provide MCU-to-keyboard communication; e.g. pressing the Caps Lock key will not turn on the Caps Lock LED.

External dependencies of PS/2 Library

The following variables must be defined in all projects using PS/2 Library:	Description:	Example :
`dim PS2_Data as sbit sfr external`	PS/2 Data line.	`dim PS2_Data as sbit at PINC.B0`
`dim PS2_In_Clock as sbit sfr external`	PS/2 Clock line in.	`dim PS2_In_Clock as sbit at PINC.B1`
`dim PS2_Out_Clock as sbit sfr external`	PS/2 Clock line out.	`dim PS2_Out_Clock as sbit at PORTC.B0`
`dim PS2_Data_Direction as sbit sfr external`	Direction of the PS/2 Data pin.	`dim PS2_Data_Direction as sbit at DDRC.B0`
`dim PS2_Clock_Direction as sbit sfr external`	Direction of the PS/2 Clock pin.	`dim PS2_Clock_Direction as sbit at DDRC.B1`

Library Routines

- Ps2_Config
- Ps2_Key_Read

Ps2_Config

Prototype	`sub procedure Ps2_Config()`
Returns	Nothing.
Description	Initializes the MCU for work with the PS/2 keyboard.
Requires	Global variables : - `PS2_Data:` Data signal line - `PS2_In_Clock:` Clock signal line in - `PS2_Out_Clock:` Clock signal line out - `PS2_Data_Direction:` Direction of the Data pin - `PS2_Clock_Direction:` Direction of the Clock pin must be defined before using this function.

Example	`// PS2 pinout definition`
	`dim PS2_Data as sbit at PINC.B0`
	`dim PS2_In_Clock as sbit at PINC.B1`
	`dim PS2_Out_Clock as sbit at PORTC.B1`
	`dim PS2_Data_Direction as sbit at DDRC.B0`
	`dim PS2_Clock_Direction as sbit at DDRC.B1`
	`// End of PS2 pinout definition`
	
	`...`
	`Ps2_Config()  ' Init PS/2 Keyboard`

Ps2_Key_Read

Prototype	`sub function Ps2_Key_Read(dim byref value as byte, dim byref special as byte, dim byref pressed as byte) as byte`
Returns	- `1` if reading of a key from the keyboard was successful - `0` if no key was pressed
Description	The function retrieves information on key pressed. Parameters : - `value:` holds the value of the key pressed. For characters, numerals, punctuation marks, and space value will store the appropriate ASCII code. Routine “recognizes” the function of Shift and Caps Lock, and behaves appropriately. For special function keys see Special Function Keys Table. - `special:` is a flag for special function keys (F1, Enter, Esc, etc). If key pressed is one of these, `special` will be set to 1, otherwise 0. - `pressed:` is set to 1 if the key is pressed, and 0 if it is released.
Requires	PS/2 keyboard needs to be initialized. See Ps2_Config routine.

Example	`dim value, special, pressed as byte`
	`...`
	`do {`
	`  if (Ps2_Key_Read(value, special, pressed)) then`
	`  if ((value = 13) and (special = 1)) then`
	`  break`
	`  end if`
	`  end if`
	`loop until (0=1)`

Special Function Keys

Adapter Board	T6369C datasheet
F1	1
F2	2
F3	3
F4	4
F5	5
F6	6
F7	7
F8	8
F9	9
F10	10
F11	11
F12	12
Enter	13
Page Up	14
Page Down	15
Backspace	16
Insert	17
Delete	18
Windows	19
Ctrl	20
Shift	21
Alt	22
Print Screen	23
Pause	24
Caps Lock	25
End	26
Home	27
Scroll Lock	28
Num Lock	29
Left Arrow	30
Right Arrow	31
Up Arrow	32
Down Arrow	33
Escape	34
Tab	35

Library Example

This simple example reads values of the pressed keys on the PS/2 keyboard and sends them via UART.

```
program PS2_Example

dim keydata, special, down as byte

dim PS2_Data           as sbit at PINC.B0
    PS2_Clock_Input    as sbit at PINC.B1
    PS2_Clock_Output   as sbit at PORTC.B1

    PS2_Data_Direction  as sbit at DDRC.B0
    PS2_Clock_Direction as sbit at DDRC.B1

main:
  UART1_Init(19200)          ' Initialize UART module at 19200 bps
  Ps2_Config()               ' Init PS/2 Keyboard
  Delay_ms(100)              ' Wait for keyboard to finish
  UART1_Write("R")           ' Ready

  while TRUE                                                        '
Endless loop
    if (Ps2_Key_Read(keydata, special, down) <> 0) then         ' If
data was read from PS/2
      if (((down <> 0) and (keydata = 16)) <> 0) then           '
Backspace read
        UART1_Write(0x08)                                       '
Send Backspace to USART terminal
         else if (((down <> 0) and (keydata = 13)) <> 0) then   '
Enter read
          UART1_Write(10)                                       '
Send carriage return to usart terminal
          UART1_Write(13)                                       '
Uncomment this line if usart terminal also expects line feed
                                        '   for new line transition
            else if (((down <> 0) and (special = 0) and (keydata <>
0)) <> 0) then    ' Common key read
              UART1_Write(keydata)                              '
Send key to usart terminal
             end if
         end if
       end if
     end if
   Delay_ms(10)                                 ' Debounce period
  wend
end.
```

HW Connection

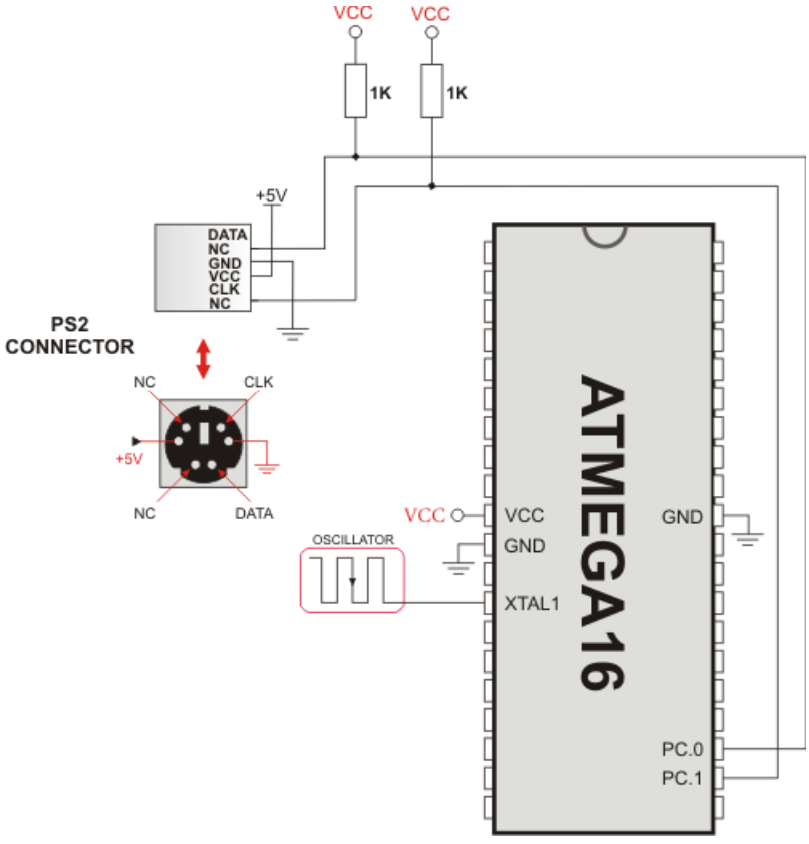

Example of PS2 keyboard connection

PWM LIBRARY

CMO module is available with a number of AVR MCUs. mikroBasic PRO for AVR provides library which simplifies using PWM HW Module.

Note: For better understanding of PWM module it would be best to start with the example provided in Examples folder of our mikroBasic PRO for AVR compiler. When you select a MCU, mikroBasic PRO for AVR automaticaly loads the correct PWM library (or libraries), which can be verified by looking at the Library Manager. PWM library handles and initializes the PWM module on the given AVR MCU, but it is up to user to set the correct pins as PWM output, this topic will be covered later in this section. mikroBasic PRO for AVR does not support enhanced PWM modules.

Library Routines

- PWM_Init
- PWM_Set_Duty
- PWM_Start
- PWM_Stop
- PWM1_Init
- PWM1_Set_Duty
- PWM1_Start
- PWM1_Stop

Predefined constants used in PWM library

The following variables are used in PWM library functions:	Description:
_PWM_PHASE_CORRECT_MODE	Selects Phase Correct PWM mode on first PWM library.
_PWM1_PHASE_CORRECT_MODE	Selects Phase Correct PWM mode on second PWM library (if it exists in Library Manager.
_PWM_FAST_MODE	Selects Fast PWM mode on first PWM library.
_PWM1_FAST_MODE	Selects Fast PWM mode on second PWM library (if it exists in Library Manager.
_PWM_PRESCALER_1	Sets prescaler value to 1 (No prescaling).
_PWM_PRESCALER_8	Sets prescaler value to 8.
_PWM_PRESCALER_32	Sets prescaler value to 32 (this value is not available on every MCU. Please use Code Assistant to see if this value is available for the given MCU.
_PWM_PRESCALER_64	Sets prescaler value to 64.
_PWM_PRESCALER_128	Sets prescaler value to 128 (this value is not available on every MCU. Please use Code Assistant to see if this value is available for the given MCU.

_PWM_PRESCALER_256	Sets prescaler value to 256.
_PWM_PRESCALER_1024	Sets prescaler value to 1024.
_PWM1_PRESCALER_1	Sets prescaler value to 1 on second PWM library (if it exists in Library Manager).
_PWM1_PRESCALER_8	Sets prescaler value to 8 on second PWM library (if it exists in Library Manager).
_PWM1_PRESCALER_32	Sets prescaler value to 32 on second PWM library (if it exists in Library Manager). This value is not available on every MCU. Please use Code Assistant to see if this value is available for the given MCU.
_PWM1_PRESCALER_64	Sets prescaler value to 64 on second PWM library (if it exists in Library Manager).
_PWM1_PRESCALER_128	Sets prescaler value to 128 on second PWM library (if it exists in Library Manager). This value is not available on every MCU. Please use Code Assistant to see if this value is available for the given MCU.
_PWM1_PRESCALER_256	Sets prescaler value to 256 on second PWM library (if it exists in Library Manager).
_PWM1_PRESCALER_1024	Sets prescaler value to 1024 on second PWM library (if it exists in Library Manager).
_PWM_INVERTED	Selects the inverted PWM mode.
_PWM1_INVERTED	Selects the inverted PWM mode on second PWM library (if it exists in Library Manager).
_PWM_NON_INVERTED	Selects the normal (non inverted) PWM mode.
_PWM1_NON_INVERTED	Selects the normal (non inverted) PWM mode on second PWM library (if it exists in Library Manager).

Note: Not all of the MCUs have both PWM and PWM1 library included. Sometimes, like its the case with ATmega8515, MCU has only PWM library. Therefore constants that have in their name PWM1 are invalid (for ATmega8515) and will not be visible from Code Assistant. It is highly advisable to use this feature, since it handles all the constants (available) nad eliminates any chance of typing error.

PWM_Init

Prototype	`sub procedure PWM_Init(dim wave_mode as byte, dim prescaler as byte, dim inverted as byte, dim duty as byte)`
Returns	Nothing.
Description	Initializes the PWM module. Parameter wave_mode is a desired PWM mode. There are two modes: Phase Correct and Fast PWM. Parameter prescaler chooses prescale value N = 1,8,64,256 or 1024 (some modules support 32 and 128, but for this you will need to check the datasheet for the desired MCU). Paremeter inverted is for choosing between inverted and non inverted PWM signal. Parameter duty sets duty ratio from 0 to 255. PWM signal graphs and formulas are shown below. PHASE MODE $f_{pwm} = \frac{f_{clk\ i/o}}{N \cdot 510}$ 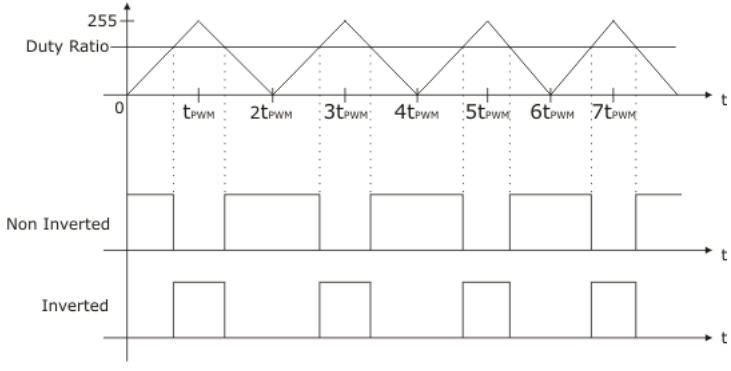 FAST MODE $f_{pwm} = \frac{f_{clk\ i/o}}{N \cdot 256}$ 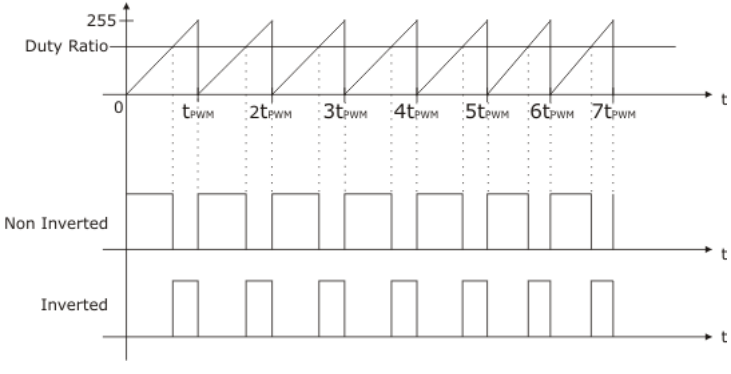 PWM_Init must be called before using other functions from PWM Library.

Requires	You need a CMO on the given MCU (that supports PWM).
	
	Before calling this routine you must set the output pin for the PWM (according to the datasheet):
	`DDRB.3 = 1; // set PORTB pin 3 as output for the PWM`
	This code oxample is for ATmega16, for different MCU please consult datasheet for the correct pinout of the PWM module or modules.

Example	Initialize PWM module: `PWM_Init(_PWM_FAST_MODE, _PWM_PRESCALER_8, _PWM_NON_INVERTED, 127)`

PWM_Set_Duty

Prototype	`sub procedure PWM_Set_Duty(dim duty as byte)`
Returns	Nothing.
Description	Changes PWM duty ratio. Parameter duty takes values from 0 to 255, where 0 is 0%, 127 is 50%, and 255 is 100% duty ratio. Other specific values for duty ratio can be calculated as `(Percent*255)/100`.
Requires	PWM module must to be initialised (PWM_Init) before using PWM_Set_Duty function.
Example	For example lets set duty ratio to 75%: `PWM_Set_Duty(192)`

PWM_Start

Prototype	`sub procedure PWM_Start()`
Returns	Nothing.
Description	Starts PWM.
Requires	MCU must have CMO module to use this library. PWM_Init must be called before using this routine.
Example	`PWM_Start()`

PWM_Stop

Prototype	`sub procedure PWM_Stop()`
Returns	Nothing.
Description	Stops the PWM.
Requires	MCU must have CMO module to use this library. PWM_Init and PWM_Start must be called before using this routine using this routine, otherwise it will have no effect as the PWM module is not running.
Example	`PWM_Stop()`

Note: Not all the AVR MCUs support both PWM and PWM1 library. The best way to verify this is by checking the datasheet for the desired MCU. Also you can check this by selecting a MCU in mikroBasic PRO for AVR looking at the Library Manager. If library manager loads both PWM and PWM1 library (you are able to check them) then this MCU supports both PWM libraries. Here you can take full advantage of our Code Assistant and Parameter Assistant feature of our compiler.

PWM1_Init

Prototype	`sub procedure PWM1_Init(dim wave_mode as byte, dim prescaler as byte, dim inverted as byte, dim duty as byte)`
Returns	Nothing.
Description	Initializes the PWM module. Parameter wave_mode is a desired PWM mode. There are two modes: Phase Correct and Fast PWM. Parameter prescaler chooses prescale value N = 1,8,64,256 or 1024 (some modules support 32 and 128, but for this you will need to check the datasheet for the desired MCU). Paremeter inverted is for choosing between inverted and non inverted PWM signal. Parameter duty sets duty ratio from 0 to 255. PWM signal graphs and formulas are shown below. PHASE MODE $f_{pwm} = \frac{f_{clk\ i/o}}{N \cdot 510}$ 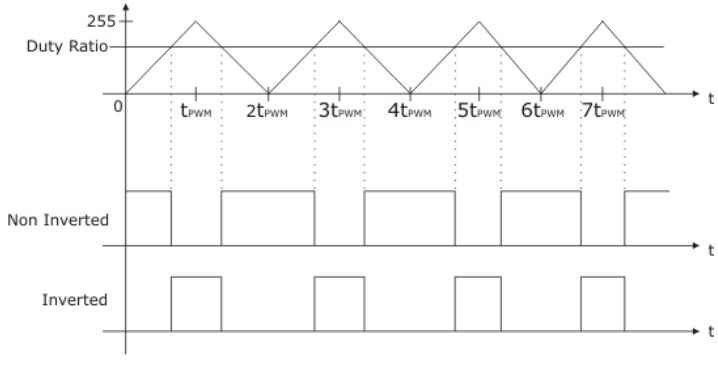

Description	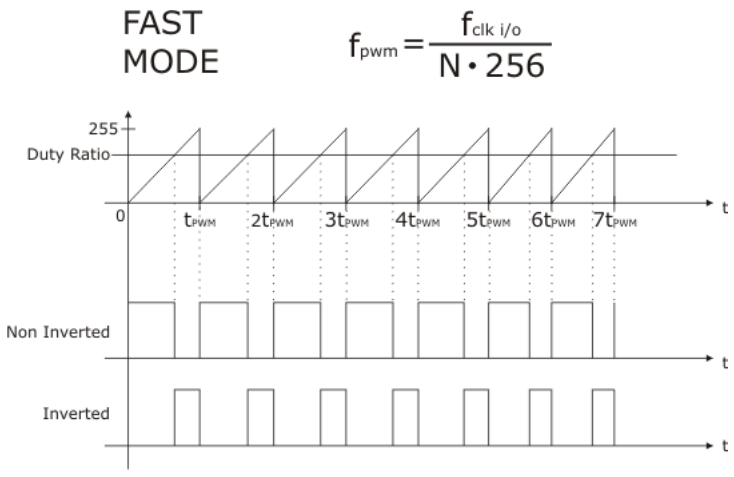 The N variable represents the `prescaler` factor (1, 8, 64, 256, or 1024). Some modules also support 32 and 128 `prescaler` value, but for this you will need to check the datasheet for the desired MCU) PWM1_Init must be called before using other functions from PWM Library.

Requires	You need a CMO on the given MCU (that supports PWM).
	
	Before calling this routine you must set the output pin for the PWM (according to the datasheet):
	`DDRD.7 = 1; // set PORTD pin 7 as output for the PWM1`
	This code oxample is for ATmega16 (second PWM module), for different MCU please consult datasheet for the correct pinout of the PWM module or modules.

Example	Initialize PWM module: `PWM1_Init(_PWM1_FAST_MODE, _PWM1_PRESCALER_8, _PWM1_NON_INVERTED, 127)`

PWM1_Set_Duty

Prototype	`sub procedure PWM1_Set_Duty(dim duty as byte)`
Returns	Nothing.
Description	Changes PWM duty ratio. Parameter `duty` takes values from 0 to 255, where 0 is 0%, 127 is 50%, and 255 is 100% duty ratio. Other specific values for duty ratio can be calculated as `(Percent*255)/100`.
Requires	PWM module must to be initialised (PWM1_Init) before using PWM_Set_Duty function.
Example	For example lets set duty ratio to 75%: `PWM1_Set_Duty(192)`

PWM1_Start

Prototype	`sub procedure PWM1_Start()`
Returns	Nothing.
Description	Starts PWM.
Requires	MCU must have CMO module to use this library. PWM1_Init must be called before using this routine.
Example	`PWM1_Start()`

PWM1_Stop

Prototype	`sub procedure PWM1_Stop()`
Returns	Nothing.
Description	Stops the PWM.
Requires	MCU must have CMO module to use this library. PWM1_Init and PWM1_Start must be called before using this routine using this routine, otherwise it will have no effect as the PWM module is not running.
Example	`PWM1_Stop();`

Library Example

The example changes PWM duty ratio on pin PB3 continually. If LED is connected to PB3, you can observe the gradual change of emitted light.

```
program PWM_Test

dim current_duty as byte
    current_duty1 as byte

main:
  DDB0_bit = 0                        ' Set PORTB pin 0 as input
  DDB1_bit = 0                        ' Set PORTB pin 1 as input

  DDC0_bit = 0                        ' Set PORTC pin 0 as input
  DDC1_bit = 0                        ' Set PORTC pin 1 as input

  current_duty  = 127                ' initial value for current_duty
  current_duty1 = 127                ' initial value for current_duty

  DDB3_bit = 1                        ' Set PORTB pin 3 as output pin
for the PWM (according to datasheet)
  DDD7_bit = 1                        ' Set PORTD pin 7 as output pin
for the PWM1 (according to datasheet)

          PWM_Init(_PWM_PHASE_CORRECT_MODE,      _PWM_PRESCALER_8,
_PWM_NON_INVERTED, 127)
        PWM1_Init(_PWM1_PHASE_CORRECT_MODE,     _PWM1_PRESCALER_8,
_PWM1_NON_INVERTED, 127)

  while TRUE                              ' Endless loop

    if (PINB0_bit <> 0) then ' Detect if PORTB pin 0 is pressed
      Delay_ms(40)       ' Small delay to avoid deboucing effect
      Inc(current_duty)                 ' Increment duty ratio
      PWM_Set_Duty(current_duty)       ' Set incremented duty
    end if

    if (PINB1_bit <> 0) then   ' Detect if PORTB pin 1 is pressed
      Delay_ms(40)      ' Small delay to avoid deboucing effect
      Dec(current_duty)                 ' Decrement duty ratio
      PWM_Set_Duty(current_duty)       ' Set decremented duty ratio
    end if

    if (PINC0_bit <> 0) then   ' Detect if PORTC pin 0 is pressed
      Delay_ms(40)        ' Small delay to avoid deboucing effect
      Inc(current_duty1)                ' Increment duty ratio
      PWM1_Set_Duty(current_duty1)     ' Set incremented duty
    end if
```

```
if (PINC1_bit <> 0) then   ' Detect if PORTC pin 1 is pressed
      Delay_ms(40)         ' Small delay to avoid deboucing effect
      Dec(current_duty1)                ' Decrement duty ratio
      PWM1_Set_Duty(current_duty1)      ' Set decremented duty ratio
    end if

  wend

end.
```

HW Connection

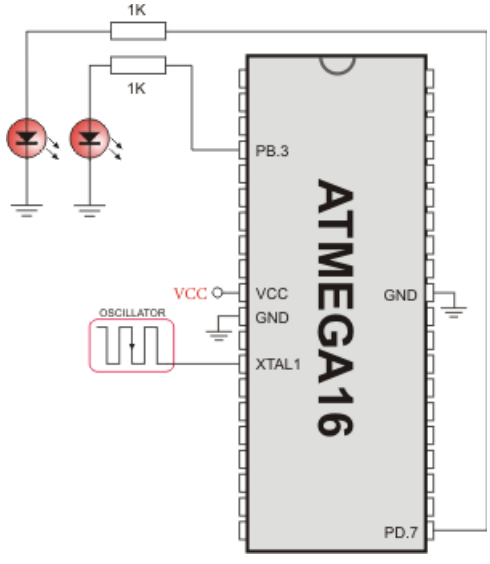

PWM demonstration

PWM 16 BIT LIBRARY

CMO module is available with a number of AVR MCUs. mikroBasic PRO for AVR provides library which simplifies using PWM HW Module.

Note: For better understanding of PWM module it would be best to start with the example provided in Examples folder of our mikroBasic PRO for AVR compiler. When you select a MCU, mikroBasic PRO for AVR automaticaly loads the correct PWM-16bit library, which can be verified by looking at the Library Manager. PWM library handles and initializes the PWM module on the given AVR MCU, but it is up to user to set the correct pins as PWM output, this topic will be covered later in this section.

Library Routines

- PWM16bit_Init
- PWM16bit_Change_Duty
- PWM16bit_Start
- PWM16bit_Stop

Predefined constants used in PWM-16bit library

The following variables are used in PWM-16bit library functions:	Description:
_PWM16_PHASE_CORRECT_MODE_8BIT	Selects Phase Correct, 8-bit mode.
_PWM16_PHASE_CORRECT_MODE_9BIT	Selects Phase Correct, 9-bit mode.
_PWM16_PHASE_CORRECT_MODE_10BIT	Selects Phase Correct, 10-bit mode.
_PWM16_FAST_MODE_8BIT	Selects Fast, 8-bit mode.
_PWM16_FAST_MODE_9BIT	Selects Fast, 9-bit mode.
_PWM16_FAST_MODE_10BIT	Selects Fast, 10-bit mode.
_PWM16_PRESCALER_16bit_1	Sets prescaler value to 1 (No prescaling).
_PWM16_PRESCALER_16bit_8	Sets prescaler value to 8.
_PWM16_PRESCALER_16bit_64	Sets prescaler value to 64.
_PWM16_PRESCALER_16bit_256	Sets prescaler value to 256.
_PWM16_PRESCALER_16bit_1024	Sets prescaler value to 1024.
_PWM16_INVERTED	Selects the inverted PWM-16bit mode.
_PWM16__NON_INVERTED	Selects the normal (non inverted) PWM-16bit mode.
_TIMER1	Selects the Timer/Counter1 (used with PWM16bit_Start and PWM16bit_Stop.
_TIMER3	Selects the Timer/Counter3 (used with PWM16bit_Start and PWM16bit_Stop.
_TIMER1_CH_A	Selects the channel A on Timer/Counter1 (used with PWM16bit_Change_Duty).
_TIMER1_CH_B	Selects the channel B on Timer/Counter1 (used with PWM16bit_Change_Duty).
_TIMER1_CH_C	Selects the channel C on Timer/Counter1 (used with PWM16bit_Change_Duty).
_TIMER3_CH_A	Selects the channel A on Timer/Counter3 (used with PWM16bit_Change_Duty).
_TIMER3_CH_B	Selects the channel B on Timer/Counter3 (used with PWM16bit_Change_Duty).
_TIMER3_CH_C	Selects the channel C on Timer/Counter3 (used with PWM16bit_sChange_Duty).

Note: Not all of the MCUs have 16bit PWM, and not all of the MCUs have both Timer/Counter1 and Timer/Counter3. Sometimes, like its the case with ATmega168, MCU has only Timer/Counter1 and channels A and B. Therefore constants that have in their name Timer3 or channel C are invalid (for ATmega168) and will not be visible from Code Assistant. It is highly advisable to use this feature, since it handles all the constants (available) and eliminates any chance of typing error.

PWM16bit_Init

Prototype	`sub procedure PWM16bit_Init(dim wave_mode as byte, dim prescaler as byte, dim inverted as byte, dim duty as word, dim timer as byte)`
Returns	Nothing.
Description	Initializes the PWM module. Parameter `wave_mode` is a desired PWM-16bit mode. There are several modes included : - PWM, Phase Correct, 8-bit - PWM, Phase Correct, 9-bit - PWM, Phase Correct, 10-bit - Fast PWM, 8-bit - Fast PWM, 9-bit - Fast PWM, 10-bit Parameter `prescaler` chooses prescale value N = 1,8,64,256 or 1024 (some modules support 32 and 128, but for this you will need to check the datasheet for the desired MCU). Paremeter `inverted` is for choosing between inverted and non inverted PWM signal. Parameter `duty` sets duty ratio from 0 to TOP value (this value varies on the PWM wave mode selected). PWM signal graphs and formulas are shown below. FAST MODE $f_{pwm} = \frac{f_{clk\ i/o}}{N \cdot (1+TOP)}$ 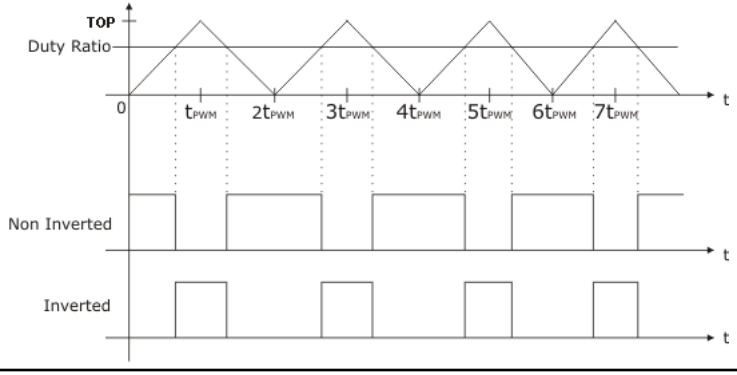

<table>
<tr><td>Description</td><td>PHASE MODE $f_{pwm} = \frac{f_{clk\ i/o}}{2 \cdot N \cdot TOP}$
 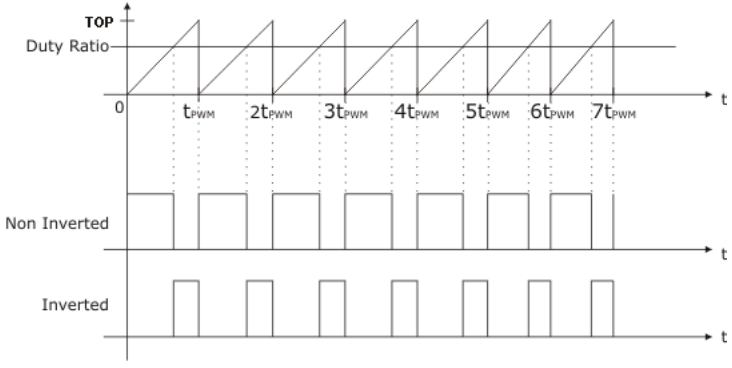

The N variable represents the prescaler factor (1, 8, 64, 256, or 1024).

PWM16bit_Init must be called before using other functions from PWM Library.</td></tr>
<tr><td>Requires</td><td>You need a CMO on the given MCU (that supports PWM-16bit).

Before calling this routine you must set the output pin for the PWM (according to the datasheet):
DDRB.B1 = 1; // set PORTB pin 1 as output for the PWM-16bit
This code example is for ATmega168, for different MCU please consult datasheet for the correct pinout of the PWM module or modules.</td></tr>
<tr><td>Example</td><td>Initialize PWM-16bit module:

PWM16bit_Init(_PWM16_PHASE_CORRECT_MODE_8BIT, _PWM16_PRESCALER_16bit_8, _PWM16_NON_INVERTED, 255, _TIMER1)</td></tr>
</table>

PWM16bit_Change_Duty

<table>
<tr><td>Prototype</td><td><code>sub procedure PWM16bit_Change_Duty(dim duty as word, dim channel as byte)</code></td></tr>
<tr><td>Returns</td><td>Nothing.</td></tr>
<tr><td>Description</td><td>Changes PWM duty ratio. Parameter <code>duty</code> takes values shown on the table below. Where 0 is 0%, and TOP value is 100% duty ratio. Other specific values for duty ratio can be calculated as <code>(Percent*TOP)/100</code>.
<table>
<tr><th>Timer/Counter Mode of Operation :</th><th>TOP :</th><th>Update of OCRnX at :</th><th>TOVn Flag Set on :</th></tr>
<tr><td>PWM, Phase Correct, 8 bit</td><td>0x00FF</td><td>TOP</td><td>BOTTOM</td></tr>
<tr><td>PWM, Phase Correct, 9 bit</td><td>0x01FF</td><td>TOP</td><td>BOTTOM</td></tr>
<tr><td>PWM, Phase Correct, 10 bit</td><td>0x03FF</td><td>TOP</td><td>BOTTOM</td></tr>
<tr><td>Fast PWM, 8 bit</td><td>0x00FF</td><td>TOP</td><td>TOP</td></tr>
<tr><td>Fast PWM, 9 bit</td><td>0x01FF</td><td>TOP</td><td>TOP</td></tr>
<tr><td>Fast PWM, 10 bit</td><td>0x03FF</td><td>TOP</td><td>TOP</td></tr>
</table></td></tr>
<tr><td>Requires</td><td>PWM module must to be initialised (PWM16bit_Init) before using PWM_Set_Duty function.</td></tr>
<tr><td>Example</td><td>Example lets set duty ratio to :

<code>PWM16bit_Change_Duty(300, _TIMER1_CH_A)</code></td></tr>
</table>

PWM16bit_Start

Prototype	`sub procedure PWM16bit_Start(dim timer as byte)`
Returns	Nothing.
Description	Starts PWM-16bit module with alredy preset values (wave mode, prescaler, inverted and duty) given in the PWM16bit_Init.
Requires	MCU must have CMO module to use this library. PWM16bit_Init must be called before using this routine, otherwise it will have no effect as the PWM module is not initialised.

Example	`PWM16bit_Start( _TIMER1 )  // Starts the PWM-16bit module on Timer/Counter1`
	or
	`PWM16bit_Start( _TIMER3 )  // Starts the PWM-16bit module on Timer/Counter3`

PWM16bit_Stop

Prototype	`sub procedure PWM16_Stop(dim timer as byte)`
Returns	Nothing.
Description	Stops the PWM-16bit module, connected to Timer/Counter set in this stop function.
Requires	MCU must have CMO module to use this library. Like in PWM16bit_Start before, PWM16bit_Init must be called before using this routine , otherwise it will have no effect as the PWM module is not running.

Example	`PWM16bit_Stop( _TIMER1 )  // Stops the PWM-16bit module on Timer/Counter1`
	or
	`PWM16bit_Stop( _TIMER3 )  // Stops the PWM-16bit module on Timer/Counter3`

Library Example

The example changes PWM duty ratio continually by pressing buttons on PORTC (0-3). If LED is connected to PORTB.B1 or PORTB.B2 ,you can observe the gradual change of emitted light. This example is written for ATmega168. This AVR MCU has only Timer/Counter1 split over two channels A and B. In this example we are changing the duty ratio on both of these channels.

```
program PWM_Test

dim current_duty as byte
    current_duty1 as byte

main:
  DDC0_bit = 0                        ' Set PORTC pin 0 as input
  DDC1_bit = 0                        ' Set PORTC pin 1 as input

  DDC2_bit = 0                        ' Set PORTC pin 2 as input
  DDC3_bit = 0                        ' Set PORTC pin 3 as input

  current_duty  = 127                ' initial value for current_duty
  current_duty1 = 127                ' initial value for current_duty

  DDB1_bit = 1                        ' Set PORTB pin 1 as output pin
for the PWM (according to datasheet)
  DDB2_bit = 1                        ' Set PORTB pin 2 as output pin
for the PWM (according to datasheet)

    PWM16bit_Init(_PWM16_FAST_MODE_9BIT,   _PWM16_PRESCALER_16bit_1,
_PWM16_INVERTED, 255, 1)

  while TRUE                              ' Endless loop

    if (PINC.B0 <> 0) then    ' Detect if PORTC pin 0 is pressed
      Delay_ms(40)          ' Small delay to avoid debouncing effect
      Inc(current_duty)                  ' Increment duty ratio
      PWM_Set_Duty(current_duty)       ' Set incremented duty
    end if

    if (PINC.B1 <> 0) then    ' Detect if PORTC pin 1 is pressed
      Delay_ms(40)          ' Small delay to avoid debouncing effect
      Dec(current_duty)                  ' Decrement duty ratio
      PWM_Set_Duty(current_duty)       ' Set decremented duty ratio
    end if

    if (PINC.B2 <> 0) then    ' Detect if PORTC pin 2 is pressed
      Delay_ms(40)          ' Small delay to avoid debouncing effect
      Inc(current_duty1)                 ' Increment duty ratio
      PWM1_Set_Duty(current_duty1)     ' Set incremented duty
    end if

    if (PINC.B3 <> 0) then   ' Detect if PORTC pin 3 is pressed
      Delay_ms(40)          ' Small delay to avoid debouncing effect
      Dec(current_duty1)                 ' Decrement duty ratio
      PWM1_Set_Duty(current_duty1)     ' Set decremented duty ratio
    end if

  wend
```

HW Connection

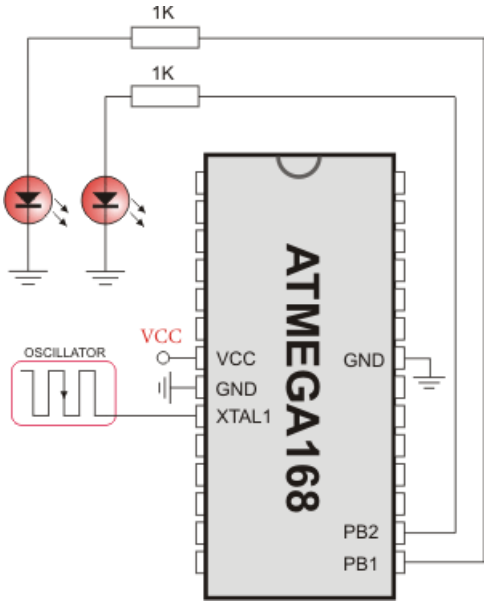

PWM demonstration

RS-485 LIBRARY

RS-485 is a multipoint communication which allows multiple devices to be connected to a single bus. The mikroBasic PRO for AVR provides a set of library routines for comfortable work with RS485 system using Master/Slave architecture. Master and Slave devices interchange packets of information. Each of these packets contains synchronization bytes, CRC byte, address byte and the data. Each Slave has unique address and receives only packets addressed to it. The Slave can never initiate communication.

It is the user's responsibility to ensure that only one device transmits via 485 bus at a time.

The RS-485 routines require the UART module. Pins of UART need to be attached to RS-485 interface transceiver, such as LTC485 or similar (see schematic at the bottom of this page).

Library constants:

- START byte value = 150
- STOP byte value = 169
- Address 50 is the broadcast address for all Slaves (packets containing address 50 will be received by all Slaves except the Slaves with addresses 150 and 169).

Note:

- Prior to calling any of this library routines, UART_Wr_Ptr needs to be initialized with the appropriate UART_Write routine.
- Prior to calling any of this library routines, UART_Rd_Ptr needs to be initialized with the appropriate UART_Read routine.
- Prior to calling any of this library routines, UART_Rdy_Ptr needs to be initialized with the appropriate UART_Ready routine.
- Prior to calling any of this library routines, UART_TX_Idle_Ptr needs to be initialized with the appropriate UART_TX_Idle routine.

External dependencies of RS-485 Library

The following variable must be defined in all projects using RS-485 Library:	Description:	Example :
`dim RS485_rxtx_pin as sbit sfr external`	Control RS-485 Transmit/Receive operation mode	`dim RS485_rxtx_pin as sbit at PORTD.B2`
`dim RS485_rxtx_pin_direction as sbit sfr external`	Direction of the RS-485 Transmit/Receive pin	`dim RS485_rxtx_pin_direction as sbit at DDRD.B2`

Library Routines

- RS485Master_Init
- RS485Master_Receive
- RS485Master_Send
- RS485Slave_Init
- RS485Slave_Receive
- RS485Slave_Send

RS485Master_Init

Prototype	`sub procedure RS485Master_Init()`
Returns	Nothing.
Description	Initializes MCU as a Master for RS-485 communication.
Requires	Global variables : - `RS485_rxtx_pin` - this pin is connected to RE/DE input of RS-485 transceiver(see schematic at the bottom of this page). RE/DE signal controls RS-485 transceiver operation mode. - `RS485_rxtx_pin_direction` - direction of the RS-485 Transmit/Receive pin must be defined before using this function. UART HW module needs to be initialized. See UARTx_Init.

Example	`' RS485 module pinout`
	`dim RS485_rxtx_pin as sbit at PORTD.B2`
	`dim RS485_rxtx_pin_direction as sbit at DDRD.B2`
	`' End of RS485 module pinout`
	
	`' Pass pointers to UART functions of used UART module`
	`UART_Wr_Ptr = @UART1_Write`
	`UART_Rd_Ptr = @UART1_Read`
	`UART_Rdy_Ptr = @UART1_Data_Ready`
	`UART_TX_Idle_Ptr = @UART1_TX_Idle`
	`...`
	`UART1_Init(9600)  ' initialize UART module`
	`RS485Master_Init()  ' intialize MCU as a Master for RS-485 communication`

RS485Master_Receive

Prototype	`sub procedure RS485Master_Receive(dim byref data_buffer as byte[ 20] )`
Returns	Nothing.
Description	Receives messages from Slaves. Messages are multi-byte, so this routine must be called for each byte received. Parameters : - `data_buffer:` 7 byte buffer for storing received data, in the following manner: - `data[ 0..2] :` message content - `data[ 3] :` number of message bytes received, 1–3 - `data[ 4] :` is set to 255 when message is received - `data[ 5] :` is set to 255 if error has occurred - `data[ 6] :` address of the Slave which sent the message The function automatically adjusts `data[ 4]` and `data[ 5]` upon every received message. These flags need to be cleared by software.
Requires	MCU must be initialized as a Master for RS-485 communication. See RS485Master_Init.

Example	`dim msg as byte[ 20]`
	`...`
	`RS485Master_Receive(msg)`

RS485Master_Send

Prototype	`sub procedure Rs485Master_Send(dim byref data_buffer as byte[ 20], dim datalen as byte, dim slave_address as byte)`
Returns	Nothing.
Description	Sends message to Slave(s). Message format can be found at the bottom of this page. Parameters : - `data_buffer:` data to be sent - `datalen:` number of bytes for transmition. Valid values: 0...3. - `slave_address:` Slave(s) address
Requires	MCU must be initialized as a Master for RS-485 communication. See RS485Master_Init. It is the user's responsibility to ensure (by protocol) that only one device sends data via 485 bus at a time.

Example	`dim msg as byte[ 20]`
	`...`
	`' send 3 bytes of data to slave with address 0x12`
	`RS485Master_Send(msg, 3, 0x12)`

RS485Slave_Init

Prototype	`sub procedure RS485Slave_Init(dim slave_address as byte)`
Returns	Nothing.
Description	Initializes MCU as a Slave for RS-485 communication. Parameters : - `slave_address:` Slave address
Requires	Global variables : - `RS485_rxtx_pin` - this pin is connected to RE/DE input of RS-485 transceiver(see schematic at the bottom of this page). RE/DE signal controls RS-485 transceiver operation mode. Valid values: 1 (for transmitting) and 0 (for receiving) - `RS485_rxtx_pin_direction` - direction of the RS-485 Transmit/Receive pin must be defined before using this function. UART HW module needs to be initialized. See UARTx_Init.

Example	`' RS485 module pinout`
	`dim RS485_rxtx_pin as sbit  at PORTD.B2`
	`dim RS485_rxtx_pin_direction as sbit  at DDRD.B2`
	`' End of RS485 module pinout`
	
	`' Pass pointers to UART functions of used UART module`
	`UART_Wr_Ptr = @UART1_Write`
	`UART_Rd_Ptr = @UART1_Read`
	`UART_Rdy_Ptr = @UART1_Data_Ready`
	`UART_TX_Idle_Ptr = @UART1_TX_Idle`
	`...`
	`UART1_Init(9600)  ' initialize UART module`
	`RS485Slave_Init(160)  ' intialize MCU as a Slave for RS-485 communication with address 160`

RS485Slave_Receive

Prototype	`sub procedure RS485Slave_Receive(dim byref data_buffer as byte[ 20] )`
Returns	Nothing.
Description	Receives messages from Master. If Slave address and Message address field don't match then the message will be discarded. Messages are multi-byte, so this routine must be called for each byte received. Parameters : - `data_buffer:` 6 byte buffer for storing received data, in the following manner: - `data[ 0..2] :` message content - `data[ 3] :` number of message bytes received, 1–3 - `data[ 4] :` is set to 255 when message is received - `data[ 5] :` is set to 255 if error has occurred The function automatically adjusts `data[ 4]` and `data[ 5]` upon every received message. These flags need to be cleared by software.
Requires	MCU must be initialized as a Slave for RS-485 communication. See RS485Slave_Init.

Example	`dim msg as byte[ 5]`
	`...`
	`RS485Slave_Read(msg)`

RS485Slave_Send

Prototype	`sub procedure RS485Slave_Send(dim byref data_buffer as byte[ 20], dim datalen as byte)`
Returns	Nothing.
Description	Sends message to Master. Message format can be found at the bottom of this page. Parameters : - `data_buffer:` data to be sent - `datalen:` number of bytes for transmition. Valid values: 0...3.
Requires	MCU must be initialized as a Slave for RS-485 communication. See RS485Slave_Init. It is the user's responsibility to ensure (by protocol) that only one device sends data via 485 bus at a time.

Example	`dim msg as byte[ 8]`
	`...`
	`' send 2 bytes of data to the master`
	`RS485Slave_Send(msg, 2)`

Library Example

This is a simple demonstration of RS485 Library routines usage.

Master sends message to Slave with address 160 and waits for a response. The Slave accepts data, increments it and sends it back to the Master. Master then does the same and sends incremented data back to Slave, etc.

Master displays received data on P0, while error on receive (0xAA) and number of consecutive unsuccessful retries are displayed on P1. Slave displays received data on P0, while error on receive (0xAA) is displayed on P1. Hardware configurations in this example are made for the EasyAVR5A board and ATmega16.

RS485 Master code:

```
program RS485_Master_Example
dim dat as byte[ 10]          ' buffer for receving/sending messages
    i, j as byte
    cnt as longint

dim rs485_rxtx_pin  as sbit at PORTD.2          ' set transcieve pin
    rs485_rxtx_pin_direction as sbit at DDRD.2     ' set transcieve
pin direction

' Interrupt routine
sub procedure interrupt() org 0x16
  RS485Master_Receive(dat)
end sub

main:
  cnt = 0
  PORTA  = 0                                ' clear PORTA
  PORTB  = 0                                ' clear PORTB
  PORTC  = 0                                ' clear PORTC

  DDRA   = 0xFF                             ' set PORTA as output
  DDRB   = 0xFF                             ' set PORTB as output
  DDRC   = 0xFF                             ' set PORTB as output

  ' Pass pointers to UART sub functions of used UART module
  UART_Wr_Ptr= @UART1_Write
  UART_Rd_Ptr = @UART1_Read
  UART_Rdy_Ptr = @UART1_Data_Ready
  UART_TX_Idle_Ptr = @UART1_TX_Idle

  UART1_Init(9600)                         ' initialize UART1 module
  Delay_ms(100)

  RS485Master_Init()                       ' initialize MCU as Master
  dat[ 0]  = 0xAA
  dat[ 1]  = 0xF0
  dat[ 2]  = 0x0F
  dat[ 4]  = 0              ' ensure that message received flag is 0
  dat[ 5]  = 0              ' ensure that error flag is 0
  dat[ 6]  = 0

  RS485Master_Send(dat,1,160)

  SREG_I_bit  = 1                 ' enable global interrupt
  RXCIE_bit   = 1                ' enable interrupt on UART receive

  while TRUE
    Inc(cnt)
    if (dat[ 5] <> 0) then        ' if an error detected, signal it
      PORTC = dat[ 5]                 '   by setting PORTC
    end if
```

```
  if (dat[ 4] <> 0) then       ' if message received successfully
      cnt = 0
      dat[ 4] = 0                        ' clear message received flag
      j = dat[ 3]
      for i = 1 to dat[ 3]               ' show data on PORTB
        PORTB = dat[ i-1]
      next i
      dat[ 0] = dat[ 0] +1               ' increment received dat[ 0]
      Delay_ms(1)                        ' send back to slave
      RS485Master_Send(dat,1,160)
    end if

    if (cnt > 100000) then    ' if in 100000 poll-cycles the answer
      Inc(PORTA)                    '    was not detected, signal
      cnt = 0                         '    failure of send-message
      RS485Master_Send(dat,1,160)
     if (PORTA > 10) then               ' if sending failed 10 times
        PORTA = 0
        RS485Master_Send(dat,1,50)    '    send message on broadcast
address
      end if
    end if
  wend
end.
```

RS485 Slave code:

```
program RS485_Slave_Example

dim dat as byte[ 20]                    ' buffer for receving/sending
messages
    i, j as byte

dim rs485_rxtx_pin as sbit at PORTD.B2          ' set transcieve pin
    rs485_rxtx_pin_direction as sbit at DDRD.B2    ' set transcieve
pin direction

' Interrupt routine
sub procedure interrupt() org 0x16
  RS485Slave_Receive(dat)
end sub

main:
  PORTB = 0                             ' clear PORTB
  PORTC = 0                             ' clear PORTC

  DDRB = 0xFF                           ' set PORTB as output
  DDRC = 0xFF                           ' set PORTB as output
```

```
' Pass pointers to UART sub functions of used UART module
 UART_Wr_Ptr = @UART1_Write
 UART_Rd_Ptr = @UART1_Read
 UART_Rdy_Ptr = @UART1_Data_Ready
 UART_TX_Idle_Ptr = @UART1_TX_Idle

 UART1_Init(9600)       ' initialize UART1 module
 Delay_ms(100)
 RS485Slave_Init(160)   ' Intialize MCU as slave, address 160

 dat[ 4]  = 0           ' ensure that message received flag is 0
 dat[ 5]  = 0           ' ensure that message received flag is 0
 dat[ 6]  = 0                 ' ensure that error flag is 0

 SREG_I_bit  = 1             ' enable global interrupt
 RXCIE_bit  = 1              ' enable interrupt on UARTs receive

 while TRUE
   if (dat[ 5] <> 0) then      ' if an error detected, signal it by
     PORTC = dat[ 5]           '    setting PORTC
     dat[ 5] = 0
   end if
   if (dat[ 4] <> 0) then    ' upon completed valid message receive
       dat[ 4] = 0                 '    data[ 4] is set to 0xFF
       j = dat[ 3]
       for i = 1 to dat[ 3]       ' show data on PORTB
         PORTB = dat[ i-1]
       next i
       dat[ 0] = dat[ 0] +1          ' increment received dat[ 0]
       Delay_ms(1)
       RS485Slave_Send(dat,1)      '    and send it back to master
   end if
 wend
end.
```

HW Connection

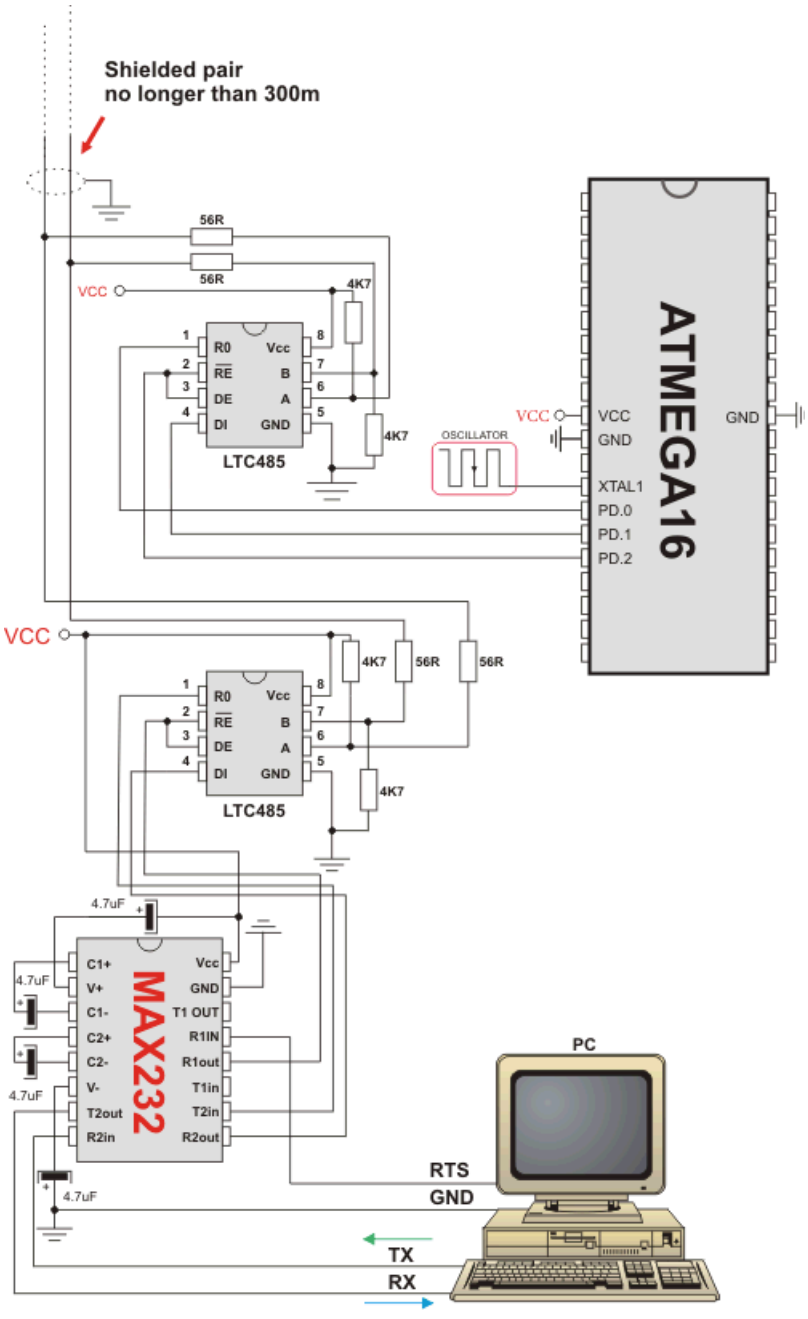

Example of interfacing PC to ATmega16 MCU via RS485 bus with LTC485 as RS-485 transceiver

Message format and CRC calculations

Q: How is CRC checksum calculated on RS485 master side?

```
START_BYTE = 0x96; ' 10010110
STOP_BYTE  = 0xA9; ' 10101001

PACKAGE:
--------
START_BYTE 0x96
ADDRESS
DATALEN
[ DATA1]              ' if exists
[ DATA2]              ' if exists
[ DATA3]              ' if exists
CRC
STOP_BYTE  0xA9

DATALEN bits
------------
bit7 = 1  MASTER SENDS
       0  SLAVE  SENDS
bit6 = 1  ADDRESS WAS XORed with 1, IT WAS EQUAL TO START_BYTE or
STOP_BYTE
       0  ADDRESS UNCHANGED
bit5 = 0  FIXED
bit4 = 1   DATA3 (if exists) WAS XORed with 1, IT WAS EQUAL TO
START_BYTE or STOP_BYTE
       0  DATA3 (if exists) UNCHANGED
bit3 = 1   DATA2 (if exists) WAS XORed with 1, IT WAS EQUAL TO
START_BYTE or STOP_BYTE
       0  DATA2 (if exists) UNCHANGED
bit2 = 1   DATA1 (if exists) WAS XORed with 1, IT WAS EQUAL TO
START_BYTE or STOP_BYTE
       0  DATA1 (if exists) UNCHANGED
bit1bit0 = 0 to 3 NUMBER OF DATA BYTES SEND

CRC generation :
----------------
crc_send  = datalen ^ address;
crc_send ^= data[ 0] ;     ' if exists
crc_send ^= data[ 1] ;     ' if exists
crc_send ^= data[ 2] ;     ' if exists
crc_send = ~crc_send;
if ((crc_send == START_BYTE) || (crc_send == STOP_BYTE))
   crc_send++;

NOTE:  DATALEN<4..0>  can  not  take  the  START_BYTE<4..0>  or
STOP_BYTE<4..0> values.
```

SOFTWARE I²C LIBRARY

The mikroBasic PRO for AVR provides routines for implementing Software I¸C communication. These routines are hardware independent and can be used with any MCU. The Software I¸C library enables you to use MCU as Master in I¸C communication. Multi-master mode is not supported.

Note: This library implements time-based activities, so interrupts need to be disabled when using Software I¸C.

Note: All Software I¸C Library functions are blocking-call functions (they are waiting for I¸C clock line to become logical one).

Note: The pins used for Software I¸C communication should be connected to the pull-up resistors. Turning off the LEDs connected to these pins may also be required.

External dependencies of Soft_I2C Library

The following variables must be defined in all projects using Soft_I2C Library:	Description:	Example :
`dim Soft_I2C_Scl_Output as sbit sfr external`	Soft I2C Clock output line.	`dim Soft_I2C_Scl_Output as sbit at PORTC.B0`
`dim Soft_I2C_Sda_Output as sbit sfr external`	Soft I2C Data output line.	`dim Soft_I2C_Sda_Output as sbit at PORTC.B1`
`dim Soft_I2C_Scl_Input as sbit sfr external`	Soft I2C Clock input line.	`dim Soft_I2C_Scl_Input as sbit at PINC.B0`
`dim Soft_I2C_Sda_Input as sbit sfr external`	Soft I2C Data input line.	`dim Soft_I2C_Sda_Input as sbit at PINC.B1`
`dim Soft_I2C_Scl_Pin_Direction as sbit sfr external`	Direction of the Soft I2C Clock pin.	`dim Soft_I2C_Scl_Pin_Direction as sbit at DDRC.B0`
`dim Soft_I2C_Sda_Pin_Direction as sbit sfr external`	Direction of the Soft I2C Data pin.	`dim Soft_I2C_Sda_Pin_Direction as sbit at DDRC.B1`

Library Routines

- Soft_I2C_Init
- Soft_I2C_Start
- Soft_I2C_Read
- Soft_I2C_Write
- Soft_I2C_Stop
- Soft_I2C_Break

Soft_I2C_Init

Prototype	`sub procedure Soft_I2C_Init()`
Returns	Nothing.
Description	Configures the software I^{2}C module.
Requires	Global variables : - `Soft_I2C_Scl_Output:` Soft I^{2}C clock output line - `Soft_I2C_Sda_Output:` Soft I^{2}C data output line - `Soft_I2C_Scl_Input:` Soft I^{2}C clock input line - `Soft_I2C_Sda_Input:` Soft I^{2}C data input line - `Soft_I2C_Scl_Pin_Direction:` Direction of the Soft I^{2}C clock pin - `Soft_I2C_Sda_Pin_Direction:` Direction of the Soft I^{2}C data pin must be defined before using this function.

Example	`'Soft_I2C pinout definition`
	`dim Soft_I2C_Scl_Output as sbit at PORTC.B0`
	`dim Soft_I2C_Sda_Output as sbit at PORTC.B1`
	`dim Soft_I2C_Scl_Input as sbit at PINC.B0`
	`dim Soft_I2C_Sda_Input as sbit at PINC.B1`
	`dim Soft_I2C_Scl_Pin_Direction as sbit at DDRC.B0`
	`dim Soft_I2C_Sda_Pin_Direction as sbit at DDRC.B1`
	`'End of Soft_I2C pinout definition`
	`...`
	`Soft_I2C_Init()`

Soft_I2C_Start

Prototype	`sub procedure Soft_I2C_Start()`
Returns	Nothing.
Description	Determines if the I2C bus is free and issues START signal.
Requires	Software I2C must be configured before using this function. See Soft_I2C_Init routine.
Example	`' Issue START signal` `Soft_I2C_Start()`

Soft_I2C_Read

Prototype	`sub function Soft_I2C_Read(dim ack as word) as byte`
Returns	One byte from the Slave.
Description	Reads one byte from the slave. Parameters : - `ack:` acknowledge signal parameter. If the `ack==0` not acknowledge signal will be sent after reading, otherwise the acknowledge signal will be sent.
Requires	Soft I2C must be configured before using this function. See Soft_I2C_Init routine. Also, START signal needs to be issued in order to use this function. See Soft_I2C_Start routine.

Example	`dim take as word`
	`...`
	`' Read data and send the not_acknowledge signal`
	`take = Soft_I2C_Read(0)`

Soft_I2C_Write

Prototype	`sub function Soft_I2C_Write(dim _Data as byte) as byte`
Returns	- `0` if there were no errors. - `1` if write collision was detected on the I2C bus.
Description	Sends data byte via the I¸C bus. Parameters : - `_Data:` data to be sent
Requires	Soft I2C must be configured before using this function. See Soft_I2C_Init routine. Also, START signal needs to be issued in order to use this function. See Soft_I2C_Start routine.

Example	`dim _data, error as byte`
	`...`
	`error = Soft_I2C_Write(data)`
	`error = Soft_I2C_Write(0xA3)`

Soft_I2C_Stop

Prototype	`sub procedure Soft_I2C_Stop()`
Returns	Nothing.
Description	Issues STOP signal.
Requires	Soft I2C must be configured before using this function. See Soft_I2C_Init routine.
Example	`' Issue STOP signal` `Soft_I2C_Stop()`

Soft_I2C_Break

Prototype	`sub procedure Soft_I2C_Break()`
Returns	Nothing.
Description	All Software I2C Library functions can block the program flow (see note at the top of this page). Call this routine from interrupt to unblock the program execution. This mechanism is similar to WDT. **Note:** Interrupts should be disabled before using Software I¸C routins again (see note at the top of this page).
Requires	Nothing.
Example	See code below.

```
'Soft_I2C pinout definition
dim Soft_I2C_Scl_Output         as sbit at PORTC.B0
dim Soft_I2C_Sda_Output         as sbit at PORTC.B1
dim Soft_I2C_Scl_Input          as sbit at PINC.B0
dim Soft_I2C_Sda_Input          as sbit at PINC.B1
dim Soft_I2C_Scl_Pin_Direction as sbit at DDRC.B0
dim Soft_I2C_Sda_Pin_Direction as sbit at DDRC.B1
'End of Soft_I2C pinout definition

dim counter as byte

sub procedure Timer0Overflow_ISR() org 0x12
  counter = 0
  if (counter >= 20) then
      Soft_I2C_Break()
      counter = 0                   'reset counter
  else
    Inc(counter)                    'increment counter
  end if
end sub

main:

  TOIE0_bit  = 1          'Timer0 overflow interrupt enable
  TCCR0_bit  = 5          'Start timer with 1024 prescaler

  SREG_I_bit = 0                     'Interrupt disable

  ...

  'try Soft_I2C_Init with blocking prevention mechanism
  SREG_I_bit = 1                     'Interrupt enable
  Soft_I2C_Init()
  SREG_I_bit = 0                     'Interrupt disable

  ...

end.
```

Library Example

The example demonstrates Software I¸C Library routines usage. The AVR MCU is connected (SCL, SDA pins) to PCF8583 RTC (real-time clock). Program reads date and time are read from the RTC and prints it on Lcd.

```
program RTC_Read

dim seconds, minutes, hours, _day, _month, year as byte     ' Global
date/time variables

' Software I2C connections
dim Soft_I2C_Scl_Output     as sbit at PORTC.B0
    Soft_I2C_Sda_Output     as sbit at PORTC.B1
    Soft_I2C_Scl_Input      as sbit at PINC.B0
    Soft_I2C_Sda_Input      as sbit at PINC.B1
    Soft_I2C_Scl_Direction as sbit at DDRC.B0
    Soft_I2C_Sda_Direction as sbit at DDRC.B1
' End Software I2C connections

' Lcd module connections
dim LCD_RS as sbit at PORTD.B2
    LCD_EN as sbit at PORTD.B3
    LCD_D4 as sbit at PORTD.B4
    LCD_D5 as sbit at PORTD.B5
    LCD_D6 as sbit at PORTD.B6
    LCD_D7 as sbit at PORTD.B7
    LCD_RS_Direction as sbit at DDRD.B2
    LCD_EN_Direction as sbit at DDRD.B3
    LCD_D4_Direction as sbit at DDRD.B4
    LCD_D5_Direction as sbit at DDRD.B5
    LCD_D6_Direction as sbit at DDRD.B6
    LCD_D7_Direction as sbit at DDRD.B7
' End Lcd module connections

'---------------------- Reads time and date information from RTC
(PCF8583)
sub procedure Read_Time()
  Soft_I2C_Start()          ' Issue start signal
  Soft_I2C_Write(0xA0)      ' Address PCF8583, see PCF8583 datasheet
  Soft_I2C_Write(2)               ' Start from address 2
  Soft_I2C_Start()                ' Issue repeated start signal
  Soft_I2C_Write(0xA1)           ' Address PCF8583 for reading R/W=1
  seconds = Soft_I2C_Read(1)      ' Read seconds byte
  minutes = Soft_I2C_Read(1)      ' Read minutes byte
  hours = Soft_I2C_Read(1)        ' Read hours byte
  _day = Soft_I2C_Read(1)         ' Read year/day byte
  _month = Soft_I2C_Read(0)       ' Read weekday/month byte}
  Soft_I2C_Stop()                 ' Issue stop signal}
end sub
```

```
'-------------------- Formats date and time
sub procedure Transform_Time()
  seconds  =  ((seconds and 0xF0) >> 4)*10 + (seconds and 0x0F)  '
Transform seconds
  minutes  =  ((minutes and 0xF0) >> 4)*10 + (minutes and 0x0F)  '
Transform months
  hours    =  ((hours and 0xF0)  >> 4)*10  + (hours and 0x0F)    '
Transform hours
  year     =   (_day and 0xC0) >> 6                              '
Transform year
  _day     =  ((_day and 0x30) >> 4)*10    + (_day and 0x0F)     '
Transform day
  _month   =  ((_month and 0x10)  >> 4)*10 + (_month and 0x0F)  '
Transform month
end sub

'-------------------- Output values to Lcd
sub procedure Display_Time()
   Lcd_Chr(1, 6, (_day / 10)    + 48)     ' Print tens digit of day
variable
   Lcd_Chr(1, 7, (_day mod 10)    + 48)   ' Print oness digit of day
variable
   Lcd_Chr(1, 9, (_month / 10) + 48)
   Lcd_Chr(1,10, (_month mod 10) + 48)
   Lcd_Chr(1,15,  year          + 56)      ' Print year vaiable + 8
(start from year 2008)
   Lcd_Chr(2, 6, (hours / 10)    + 48)
   Lcd_Chr(2, 7, (hours mod 10)    + 48)
   Lcd_Chr(2, 9, (minutes / 10) + 48)
   Lcd_Chr(2,10, (minutes mod 10) + 48)
   Lcd_Chr(2,12, (seconds / 10) + 48)
   Lcd_Chr(2,13, (seconds mod 10) + 48)
end sub

'------------------ Performs project-wide init
sub procedure Init_Main()
  Soft_I2C_Init()             ' Initialize Soft I2C communication
  Lcd_Init()                  ' Initialize Lcd
  Lcd_Cmd(LCD_CLEAR)          ' Clear Lcd display
  Lcd_Cmd(LCD_CURSOR_OFF)     ' Turn cursor off
  Lcd_Out(1,1,"Date:")        ' Prepare and output static text on Lcd
  Lcd_Chr(1,8,":")
  Lcd_Chr(1,11,":")
  Lcd_Out(2,1,"Time:")
  Lcd_Chr(2,8,":")
  Lcd_Chr(2,11,":")
  Lcd_Out(1,12,"200")
end sub
```

```
'----------------- Main sub procedure
main:
  Init_Main()               ' Perform initialization

  while TRUE                ' Endless loop
    Read_Time()             ' Read time from RTC(PCF8583)
    Transform_Time()        ' Format date and time
    Display_Time()          ' Prepare and display on Lcd
  wend
end.
```

SOFTWARE SPI LIBRARY

The mikroBasic PRO for AVR provides routines for implementing Software SPI communication. These routines are hardware independent and can be used with any MCU. The Software SPI Library provides easy communication with other devices via SPI: A/D converters, D/A converters, MAX7219, LTC1290, etc.

Library configuration:

- SPI to Master mode
- Clock value = 20 kHz.
- Data sampled at the middle of interval.
- Clock idle state low.
- Data sampled at the middle of interval.
- Data transmitted at low to high edge.

Note: The Software SPI library implements time-based activities, so interrupts need to be disabled when using it.

External dependencies of Software SPI Library

The following variables must be defined in all projects using Software SPI Library:	Description:	Example :
`dim Chip_Select as sbit sfr external`	Chip select line.	`dim Chip_Select as sbit at PORTB.B0`
`dim SoftSpi_SDI as sbit sfr external`	Data In line.	`dim SoftSpi_SDI as sbit at PINB.B6`
`dim SoftSpi_SDO as sbit sfr external`	Data Out line.	`dim SoftSpi_SDO as sbit at PORTB.B5`
`dim SoftSpi_CLK as sbit sfr external`	Clock line.	`dim SoftSpi_CLK as sbit at PORTB.B7`
`dim Chip_Select_Direction as sbit sfr external`	Direction of the Chip Select pin.	`dim Chip_Select_Direction as sbit at DDRB.B0`
`dim SoftSpi_SDI_Direction as sbit sfr external`	Direction of the Data In pin.	`dim SoftSpi_SDI_Direction as sbit at DDRB.B6`
`dim SoftSpi_SDO_Direction as sbit sfr external`	Direction of the Data Out pin	`dim SoftSpi_SDO_Direction as sbit at DDRB.B5`
`dim SoftSpi_CLK_Direction as sbit sfr external`	Direction of the Clock pin.	`dim SoftSpi_CLK_Direction as sbit at DDRB.B7`

Library Routines

- Soft_SPI_Init
- Soft_SPI_Read
- Soft_SPI_Write

Soft_SPI_Init

Prototype	`sub procedure Soft_SPI_Init()`
Returns	Nothing.
Description	Configures and initializes the software SPI module.
Requires	Global variables: - `Chip_Select:` Chip select line - `SoftSpi_SDI:` Data in line - `SoftSpi_SDO:` Data out line - `SoftSpi_CLK:` Data clock line - `Chip_Select_Direction:` Direction of the Chip select pin - `SoftSpi_SDI_Direction:` Direction of the Data in pin - `SoftSpi_SDO_Direction:` Direction of the Data out pin - `SoftSpi_CLK_Direction:` Direction of the Data clock pin must be defined before using this function.

Example	`' soft_spi pinout definition`
	`dim Chip_Select as sbit at PORTB.B0`
	`dim SoftSpi_SDI as sbit at PINB.B6`
	`dim SoftSpi_SDO as sbit at PORTB.B5`
	`dim SoftSpi_CLK as sbit at PORTB.B7`
	`dim Chip_Select_Direction as sbit at DDRB.B0`
	`dim SoftSpi_SDI_Direction as sbit at DDRB.B6`
	`dim SoftSpi_SDO_Direction as sbit at DDRB.B5`
	`dim SoftSpi_CLK_Direction as sbit at DDRB.B7`
	`' end of soft_spi pinout definition`
	
	`...`
	`Soft_SPI_Init() ' Init Soft_SPI`

Soft_SPI_Read

Prototype	`sub function Soft_SPI_Read(dim sdata as byte) as word`
Returns	Byte received via the SPI bus.
Description	This routine performs 3 operations simultaneously. It provides clock for the Software SPI bus, reads a byte and sends a byte. Parameters : - `sdata:` data to be sent.
Requires	Soft SPI must be initialized before using this function. See Soft_SPI_Init routine.

Example	`dim data_read as byte`
	`    data_send as byte`
	`...`
	`' Read a byte and assign it to data_read variable`
	`' (data_send byte will be sent via SPI during the Read operation)`
	`data_read = Soft_SPI_Read(data_send)`

Soft_SPI_Write

Prototype	`sub procedure Soft_SPI_Write(dim sdata as byte)`
Returns	Nothing.
Description	This routine sends one byte via the Software SPI bus. Parameters : - `sdata:` data to be sent.
Requires	Soft SPI must be initialized before using this function. See Soft_SPI_Init routine.
Example	`' Write a byte to the Soft SPI bus` `Soft_SPI_Write(0xAA)`

Library Example

This code demonstrates using library routines for Soft_SPI communication. Also, this example demonstrates working with Microchip's MCP4921 12-bit D/A converter.

```
program Soft_SPI

' DAC module connections
dim Chip_Select as sbit at PORTB.0
     SoftSpi_CLK as sbit at PORTB.7
     SoftSpi_SDI as sbit at PINB.6    ' Note: Input signal
     SoftSpi_SDO as sbit at PORTB.5

dim Chip_Select_Direction as sbit at DDRB.0
     SoftSpi_CLK_Direction as sbit at DDRB.7
     SoftSpi_SDI_Direction as sbit at DDRB.6
     SoftSpi_SDO_Direction as sbit at DDRB.5
' End DAC module connections

dim value as word

sub procedure InitMain()
  DDA0_bit = 0                              ' Set PA0 pin as input
  DDA1_bit = 0                              ' Set PA1 pin as input
  Chip_Select = 1                           ' Deselect DAC
  Chip_Select_Direction = 1                 ' Set CS# pin as Output
  Soft_Spi_Init()                           ' Initialize Soft_SPI
end sub

' DAC increments (0..4095) --> output voltage (0..Vref)
sub procedure DAC_Output(dim valueDAC as word)
dim temp as byte
  Chip_Select = 0                             ' Select DAC chip
  ' Send High Byte
  temp = word(valueDAC >> 8) and 0x0F     ' Store valueDAC[11..8] to
temp[3..0]

  temp = temp or 0x30                       ' Define DAC setting, see
MCP4921 datasheet
  Soft_SPI_Write(temp)          ' Send high byte via Soft SPI

  ' Send Low Byte
  temp = valueDAC               ' Store valueDAC[7..0] to temp[7..0]
  Soft_SPI_Write(temp)         ' Send low byte via Soft SPI

  Chip_Select = 1                             ' Deselect DAC chip
end sub

main:
  InitMain()                          ' Perform main initialization
```

```
 value = 2048                        ' When program starts, DAC gives
                                     '   the output in the mid-range
  while (TRUE)                       ' Endless loop
    if ((PINA0_bit) and (value < 4095)) then      ' If PA0 button is
pressed
      Inc(value)                     '   increment value
    else
      if ((PINA1_bit) and (value > 0)) then       ' If PA1 button is
pressed
        Dec(value)                  '   decrement value
      end if
    end if

    DAC_Output(value)              ' Send value to DAC chip
    Delay_ms(1)                     ' Slow down key repeat pace
  wend
end.
```

SOFTWARE UART LIBRARY

The mikroBasic PRO for AVR provides routines for implementing Software UART communication. These routines are hardware independent and can be used with any MCU. The Software UART Library provides easy communication with other devices via the RS232 protocol.

Note: The Software UART library implements time-based activities, so interrupts need to be disabled when using it.

External dependencies of Software UART Library

The following variables must be defined in all projects using Software UART Library:	Description:	Example :
`dim Soft_UART_Rx_Pin as sbit sfr external`	Receive line.	`dim Soft_UART_Rx_Pin as sbit at PIND.B0`
`dim Soft_UART_Tx_Pin as sbit sfr external`	Transmit line.	`dim Soft_UART_Tx_Pin as sbit at PORTD.B1`
`dim Soft_UART_Rx_Pin_Direction as sbit sfr external`	Direction of the Receive pin.	`dim Soft_UART_Rx_Pin_Direction as sbit at DDRD.B0`
`dim Soft_UART_Tx_Pin_Direction as sbit sfr external`	Direction of the Transmit pin.	`dim Soft_UART_Tx_Pin_Direction as sbit at DDRD.B1`

Library Routines

- Soft_UART_Init
- Soft_UART_Read
- Soft_UART_Write
- Soft_UART_Break

Soft_UART_Init

Prototype	`sub function Soft_UART_Init(dim baud_rate as longword, dim inverted as byte) as byte`
Returns	- 2 - error, requested baud rate is too low - 1 - error, requested baud rate is too high - 0 - successfull initialization
Description	Configures and initializes the software UART module. Parameters : - baud_rate: baud rate to be set. Maximum baud rate depends on the MCU's clock and working conditions. - inverted: inverted output flag. When set to a non-zero value, inverted logic on output is used. Software UART routines use Delay_Cyc routine. If requested baud rate is too low then calculated parameter for calling Delay_Cyc exceeeds Delay_Cyc argument range. If requested baud rate is too high then rounding error of Delay_Cyc argument corrupts Software UART timings.
Requires	Global variables: - Soft_UART_Rx_Pin: Receiver pin - Soft_UART_Tx_Pin: Transmiter pin - Soft_UART_Rx_Pin_Direction: Direction of the Receiver pin - Soft_UART_Tx_Pin_Direction: Direction of the Transmiter pin must be defined before using this function.
Example	```' Soft UART connections dim Soft_UART_Rx_Pin as sbit at PIND.B0 dim Soft_UART_Tx_Pin as sbit at PORTD.B1 dim Soft_UART_Rx_Pin_Direction as sbit at DDRD.B0 dim Soft_UART_Tx_Pin_Direction as sbit at DDRD.B1 ' Soft UART connections ' Initialize Software UART communication on pins Rx, Tx, at 9600 bps Soft_UART_Init(9600, 0)```

Soft_UART_Read

Prototype	`sub function Soft_UART_Read(dim byref error as byte) as byte`
Returns	Byte received via UART.
Description	The function receives a byte via software UART. This is a blocking function call (waits for start bit). Programmer can unblock it by calling Soft_UART_Break routine. Parameters : - `error:` Error flag. Error code is returned through this variable. - `0` - no error - `1` - stop bit error - `255` - user abort, Soft_UART_Break called
Requires	Software UART must be initialized before using this function. See the Soft_UART_Init routine.

Example	`dim data as byte`
	`  error as byte`
	`...`
	`' wait until data is received`
	`do`
	`  data = Soft_Uart_Read(error)`
	`loop until (error = 0)`
	
	`' Now we can work with data:`
	`if (data) then`
	`...`
	`end if`

Soft_UART_Write

Prototype	`sub procedure Soft_UART_Write(udata as byte)`
Returns	Nothing.
Description	This routine sends one byte via the Software UART bus. Parameters : - `udata:` data to be sent.
Requires	Software UART must be initialized before using this function. See the Soft_UART_Init routine. Be aware that during transmission, software UART is incapable of receiving data – data transfer protocol must be set in such a way to prevent loss of information.

Example	`dim some_byte as byte`
	`...`
	`' Write a byte via Soft Uart`
	`some_byte = 0x0A`
	`Soft_Uart_Write(some_byte)`

Soft_UART_Break

Prototype	`sub procedure Soft_UART_Break()`
Returns	Nothing.
Description	Soft_UART_Read is blocking routine and it can block the program flow. Call this routine from interrupt to unblock the program execution. This mechanism is similar to WDT. **Note:** Interrupts should be disabled before using Software UART routines again (see note at the top of this page).
Requires	Nothing.
Example	

```
dim data1, error, counter as byte

sub procedure Timer0Overflow_ISR() org 0x12
  counter = 0
  if (counter >= 20) then
    Soft_UART_Break()
    counter = 0                    ' reset counter
  else
    Inc(counter)                   ' increment counter
  end if
end sub

main:

  TOIE0_bit  = 1                   ' Timer0 overflow interrupt
enable
  TCCR0_bit  = 5                   ' Start timer with 1024
prescaler

  SREG_I_bit = 0                   ' Interrupt disable

  ...

  Soft_UART_Init(9600)
  Soft_UART_Write(0x55)

  ...

  ' try Soft_UART_Read with blocking prevention mechanism
  SREG_I_bit = 1                   ' Interrupt enable
  data1 = Soft_UART_Read(&error)
  SREG_I_bit = 0                   ' Interrupt disable

  ...

end.
```

Library Example

This example demonstrates simple data exchange via software UART. If MCU is connected to the PC, you can test the example from the mikroBasic PRO for AVR USART Terminal Tool.

```
program Soft_UART

' Soft UART connections
dim Soft_UART_Rx_Pin as sbit at PIND.B0
    Soft_UART_Tx_Pin as sbit at PORTD.B1
    Soft_UART_Rx_Pin_Direction as sbit at DDRD.B0
    Soft_UART_Tx_Pin_Direction as sbit at DDRD.B1
' End Soft UART connections

dim error_, counter, byte_read as byte    ' Auxiliary variables

main:
  DDRB = 0xFF         ' Set PORTB as output (error signalization)
  PORTB = 0                                 ' No error

  error_ = Soft_UART_Init(9600, 0) ' Initialize Soft UART at 9600 bps
  if (error_ > 0) then
    PORTB = error_                          ' Signalize Init error
      while TRUE
        nop                                  ' Stop program
      wend
  end if
  Delay_ms(100)

  for counter = "z" to "A" step -1  ' Send bytes from 'z' downto 'A'
    Soft_UART_Write(counter)
    Delay_ms(100)
  next counter

  while TRUE                                 ' Endless loop
    byte_read = Soft_UART_Read(error_) ' Read byte, then test error flag
    if (error_ <> 0) then                   ' If error was detected
      PORTB = error_                        '   signal it on PORTB
    else
      Soft_UART_Write(byte_read)          ' If error was not detect-
ed, return byte read
    end if
  wend
end.
```

SOUND LIBRARY

The mikroBasic PRO for AVR provides a Sound Library to supply users with routines necessary for sound signalization in their applications. Sound generation needs additional hardware, such as piezo-speaker (example of piezo-speaker interface is given on the schematic at the bottom of this page).

External dependencies of Sound Library

The following variables must be defined in all projects using Sound Library:	Description:	Example :
`dim Sound_Play_Pin as sbit sfr external`	Sound output pin.	`dim Sound_Play_Pin as sbit at PORTC.B3`
`dim Sound_Play_Pin_Direction as sbit sfr external`	Direction of the Sound output pin.	`dim Sound_Play_Pin_Direction as sbit at DDRC.B3`

Library Routines

- Sound_Init
- Sound_Play

Sound_Init

Prototype	`sub procedure Sound_Init()`
Returns	Nothing.
Description	Configures the appropriate MCU pin for sound generation.
Requires	Global variables: - `Sound_Play_Pin:` Sound output pin - `Sound_Play_Pin_Direction:` Direction of the Sound output pin must be defined before using this function.

Example	`' Sound library connections`
	`dim Sound_Play_Pin as sbit at PORTC.B3`
	`dim Sound_Play_Pin_Direction as sbit at DDRC.B3`
	`' End of Sound library connections`
	
	`...`
	`Sound_Init()`

Sound_Play

Prototype	`sub procedure Sound_Play(dim freq_in_Hz as word, dim duration_ms as word)`
Returns	Nothing.
Description	Generates the square wave signal on the appropriate pin. Parameters : - `freq_in_Hz:` signal frequency in Hertz (Hz) - `duration_ms:` signal duration in miliseconds (ms)
Requires	In order to hear the sound, you need a piezo speaker (or other hardware) on designated port. Also, you must call Sound_Init to prepare hardware for output before using this function.
Example	`' Play sound of 1KHz in duration of 100ms` `Sound_Play(1000, 100)`

Library Example

The example is a simple demonstration of how to use the Sound Library for playing tones on a piezo speaker.

```
program Sound

' Sound connections
dim Sound_Play_Pin as sbit at PORTC.B3
dim Sound_Play_Pin_direction as sbit at DDRC.B3
' End Sound connections

sub procedure Tone1
    Sound_Play(500, 200)        ' Frequency = 500Hz, Duration = 200ms
end sub

sub procedure Tone2
    Sound_Play(555, 200)        ' Frequency = 555Hz, Duration = 200ms
end sub

sub procedure Tone3
    Sound_Play(625, 200)        ' Frequency = 625Hz, Duration = 200ms
end sub

sub procedure Melody             ' Plays the melody "Yellow house"
    Tone1() Tone2() Tone3() Tone3()
    Tone1() Tone2() Tone3() Tone3()
    Tone1() Tone2() Tone3()
    Tone1() Tone2() Tone3() Tone3()
    Tone1() Tone2() Tone3()
    Tone3() Tone3() Tone2() Tone2() Tone1()
end sub

sub procedure ToneA              ' Tones used in Melody2 function
    Sound_Play(1250, 20)
end sub

sub procedure ToneC
    Sound_Play(1450, 20)
end sub

sub procedure ToneE
    Sound_Play(1650, 80)
end sub

sub procedure Melody2            ' Plays Melody2
dim counter as byte
    for counter = 9 to 1 step -1
```

```
            ToneA
            ToneC
            ToneE
        next counter
end sub

main:

  DDRB = 0x00                    ' Configure PORTB as input
  Delay_ms(2000)
  Sound_Init()                   ' Initialize sound pin

  Sound_Play(2000, 1000)         ' Play starting sound, 2kHz, 1 sec-
ond

  while TRUE                     ' endless loop
    if (PINB.7 <> 0) then        ' If PORTB.7 is pressed play Tone1
      Tone1()
      while (PINB.7 <> 0)        ' Wait for button to be released
       nop
      wend
    end if

    if (PINB.6 <> 0) then        ' If PORTB.6 is pressed play Tone2
      Tone2()
      while (PINB.6 <> 0)        ' Wait for button to be released
        nop
      wend
    end if

    if (PINB.5 <> 0) then        ' If PORTB.5 is pressed play Tone3
      Tone3()
      while (PINB.5 <> 0)        ' Wait for button to be released
        nop
      wend
    end if

    if (PINB.4 <> 0) then       ' If PORTB.4 is pressed play Melody2
      Melody2()
      while (PINB.4 <> 0)        ' Wait for button to be released
        nop
      wend
    end if

    if (PINB.3 <> 0) then        ' If PORTB.3 is pressed play Melody
      Melody()
      while (PINB.3)             ' Wait for button to be released
        nop
      wend
    end if
  wend
end.
```

HW Connection

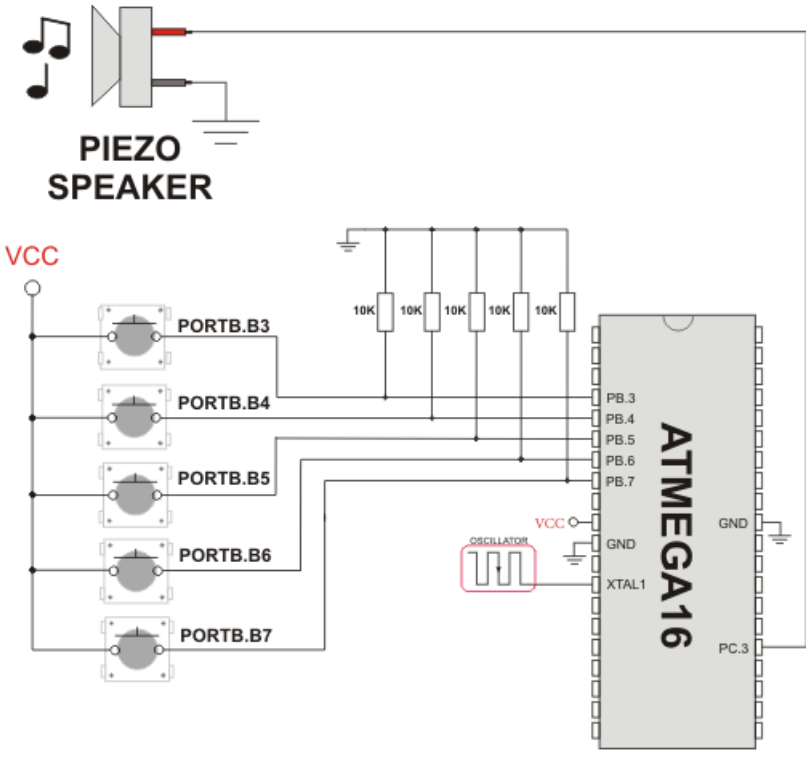

Example of Sound Library sonnection

SPI LIBRARY

mikroBasic PRO for AVR provides a library for comfortable with SPI work in Master mode. The AVR MCU can easily communicate with other devices via SPI: A/D converters, D/A converters, MAX7219, LTC1290, etc.

Note: Some AVR MCU's have alternative SPI ports, which SPI signals can be redirected to by setting or clearing SPIPS (SPI Pin Select) bit of the MCUCR register. Please consult the appropriate datasheet.

Library Routines

- SPI1_Init
- SPI1_Init_Advanced
- SPI1_Read
- SPI1_Write
- SPI1_Init

SPI1_Init

Prototype	`sub procedure SPI1_Init()`
Returns	Nothing.
Description	This routine configures and enables SPI module with the following settings: - master mode - 8 bit data transfer - most significant bit sent first - serial clock low when idle - data sampled on leading edge - serial clock = fosc/4
Requires	MCU must have SPI module.
Example	`' Initialize the SPI module with default settings` `SPI1_Init()`

SPI1_Init_Advanced

<table>
<tr><td>Prototype</td><td>sub procedure SPI1_Init_Advanced(dim mode, fcy_div, clock_and_edge as byte)</td></tr>
<tr><td>Returns</td><td>Nothing.</td></tr>
<tr><td>Description</td><td>Configures and initializes SPI. SPI1_Init_Advanced or SPI1_Init needs to be called before using other functions of SPI Library.

Parameters mode, fcy_div and clock_and_edge determine the work mode for SPI, and can have the following values:
<table>
<tr><th>Mask</th><th>Description</th><th>Predefined library const</th></tr>
<tr><td colspan="3">SPI mode constants:</td></tr>
<tr><td>0x10</td><td>Master mode</td><td>_SPI_MASTER</td></tr>
<tr><td>0x00</td><td>Slave mode</td><td>_SPI_SLAVE</td></tr>
<tr><td colspan="3">Clock rate select constants:</td></tr>
<tr><td>0x00</td><td>Sck = Fosc/4, Master mode</td><td>_SPI_FCY_DIV4</td></tr>
<tr><td>0x01</td><td>Sck = Fosc/16, Master mode</td><td>_SPI_FCY_DIV16</td></tr>
<tr><td>0x02</td><td>Sck = Fosc/64, Master mode</td><td>_SPI_FCY_DIV64</td></tr>
<tr><td>0x03</td><td>Sck = Fosc/128, Master mode</td><td>_SPI_FCY_DIV128</td></tr>
<tr><td>0x04</td><td>Sck = Fosc/2, Master mode</td><td>_SPI_FCY_DIV2</td></tr>
<tr><td>0x05</td><td>Sck = Fosc/8, Master mode</td><td>_SPI_FCY_DIV8</td></tr>
<tr><td>0x06</td><td>Sck = Fosc/32, Master mode</td><td>_SPI_FCY_DIV32</td></tr>
<tr><td colspan="3">SPI clock polarity and phase constants:</td></tr>
<tr><td>0x00</td><td>Clock idle level is low, sample on rising edge</td><td>_SPI_CLK_LO_LEADING</td></tr>
<tr><td>0x04</td><td>Clock idle level is low, sample on falling edge</td><td>_SPI_CLK_LO_TRAILING</td></tr>
<tr><td>0x08</td><td>Clock idle level is high, sample on rising edge</td><td>_SPI_CLK_HI_LEADING</td></tr>
<tr><td>0x0C</td><td>Clock idle level is high, sample on falling edge</td><td>_SPI_CLK_HI_TRAILING</td></tr>
</table>
Note: Some SPI clock speeds are not supported by all AVR MCUs and these are: Fosc/2, Fosc/8, Fosc/32. Please consult appropriate datasheet.</td></tr>
<tr><td>Requires</td><td>MCU must have SPI module.</td></tr>
<tr><td>Example</td><td>' Set SPI to the Master Mode, clock = Fosc/32 , clock idle level is high, data sampled on falling edge:
SPI1_Init_Advanced(_SPI_MASTER, _SPI_FCY_DIV32, _SPI_CLK_HI_TRAILING);</td></tr>
</table>

SPI1_Read

Prototype	`sub function SPI1_Read(dim buffer as byte) as byte`
Returns	Received data.
Description	Reads one byte from the SPI bus. Parameters : - `buffer:` dummy data for clock generation (see device Datasheet for SPI modules implementation details)
Requires	SPI module must be initialized before using this function. See SPI1_Init and SPI1_Init_Advanced routines.

Example	`' read a byte from the SPI bus`
	`dim take, dummy1 as byte`
	`...`
	`take = SPI1_Read(dummy1)`

SPI1_Write

Prototype	`sub procedure SPI1_Write(dim wrdata as byte)`
Returns	Nothing.
Description	Writes byte via the SPI bus. Parameters : - `wrdata:` data to be sent
Requires	SPI module must be initialized before using this function. See SPI1_Init and SPI1_Init_Advanced routines.

Example	`' write a byte to the SPI bus`
	`dim buffer as byte`
	`...`
	`SPI1_Write(buffer)`

Library Example

The code demonstrates how to use SPI library functions for communication between SPI module of the MCU and Microchip's MCP4921 12-bit D/A converter

```
program SPI

' DAC module connections
dim Chip_Select as sbit at PORTB.B0
    Chip_Select_Direction as sbit at DDRB.B0
' End DAC module connections

dim value as word

sub procedure InitMain()
  DDA0_bit = 0                              ' Set PA0 pin as input
  DDA1_bit = 0                              ' Set PA1 pin as input
  Chip_Select = 1                           ' Deselect DAC
  Chip_Select_Direction = 1                 ' Set CS# pin as Output
  SPI1_Init()                               ' Initialize SPI1 module
end sub

' DAC increments (0..4095) --> output voltage (0..Vref)
sub procedure DAC_Output(dim valueDAC as word)
dim temp as byte
  Chip_Select = 0                             ' Select DAC chip
  ' Send High Byte
  temp = word(valueDAC >> 8) and 0x0F     ' Store valueDAC[11..8] to
temp[3..0]
  temp = temp or 0x30 ' Define DAC setting, see MCP4921 datasheet
  SPI1_Write(temp)                            ' Send high byte via SPI

  ' Send Low Byte
  temp = valueDAC      ' Store valueDAC[7..0] to temp[7..0]
  SPI1_Write(temp)     ' Send low byte via SPI

  Chip_Select = 1                             ' Deselect DAC chip
end sub

main:
  InitMain()          ' Perform main initialization
  value = 2048        ' When program starts, DAC gives
                      '   the output in the mid-range
  while TRUE                                  ' Endless loop

     if ((PINA0_bit) and (value < 4095)) then ' If PA0 button is
pressed
       Inc(value)                                 '   increment value
     else
```

```
    if ((PINA1_bit) and (value > 0)) then   ' If PA1 button is pressed
          Dec(value)                                '    decrement value
        end if
      end if

      DAC_Output(value)                  ' Send value to DAC chip
      Delay_ms(1)                       ' Slow down key repeat pace
    wend
end.
```

HW Connection

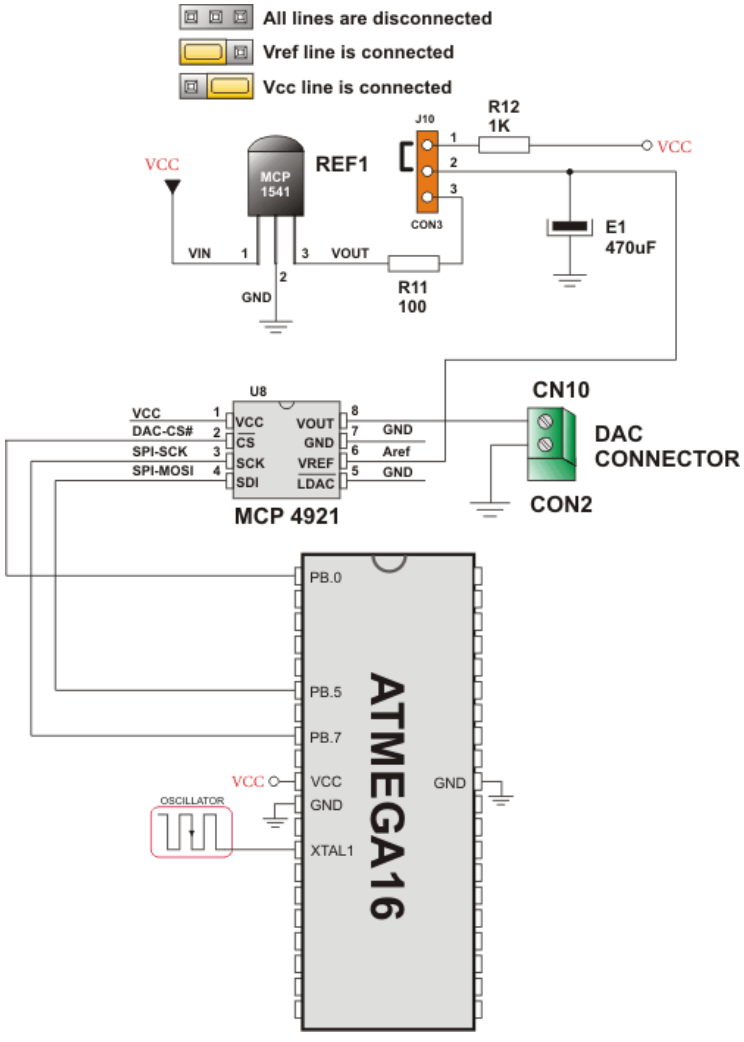

SPI HW connection

SPI ETHERNET LIBRARY

The ENC28J60 is a stand-alone Ethernet controller with an industry standard Serial Peripheral Interface (SPI™). It is designed to serve as an Ethernet network interface for any controller equipped with SPI.

The ENC28J60 meets all of the IEEE 802.3 specifications. It incorporates a number of packet filtering schemes to limit incoming packets. It also provides an internal DMA module for fast data throughput and hardware assisted IP checksum calculations. Communication with the host controller is implemented via two interrupt pins and the SPI, with data rates of up to 10 Mb/s. Two dedicated pins are used for LED link and network activity indication.

This library is designed to simplify handling of the underlying hardware (ENC28J60). It works with any AVR MCU with integrated SPI and more than 4 Kb ROM memory.

SPI Ethernet library supports:

- IPv4 protocol.
- ARP requests.
- ICMP echo requests.
- UDP requests.
- TCP requests (no stack, no packet reconstruction).
- packet fragmentation is **NOT** supported.

Note: Prior to calling any of this library routines, Spi_Rd_Ptr needs to be initialized with the appropriate SPI_Read routine.

Note: The appropriate hardware SPI module must be initialized before using any of the SPI Ethernet library routines. Refer to SPI Library.

External dependencies of SPI Ethernet Library

The following variables must be defined in all projects using SPI Ethernet Library:	Description:	Example :
`dim SPI_Ethernet_CS as sbit sfr external`	ENC28J60 chip select pin.	`dim SPI_Ethernet_CS as sbit at PORTB.B4`
`dim SPI_Ethernet_RST as sbit sfr external`	ENC28J60 reset pin.	`dim SPI_Ethernet_RST as sbit at PORTB.B5`
`dim SPI_Ethernet_CS_Direction as sbit sfr external`	Direction of the ENC28J60 chip select pin.	`dim SPI_Ethernet_CS_Direction as sbit at DDRB.B4`
`dim SPI_Ethernet_RST_Direction as sbit sfr external`	Direction of the ENC28J60 reset pin.	`dim SPI_Ethernet_RST_Direction as sbit at DDRB.B5`

The following routines must be defined in all project using SPI Ethernet Library:	Description:	Example :
`sub function Spi_Ethernet_UserTCP(dim remoteHost as ^byte, dim remotePort as word, dim localPort as word, dim reqLength as word) as word`	TCP request handler.	Refer to the library example at the bottom of this page for code implementation.
`sub function Spi_Ethernet_UserUDP(dim remoteHost as ^byte, dim remotePort as word, dim destPort as word, dim reqLength as word) as word`	UDP request handler.	Refer to the library example at the bottom of this page for code implementation.

Library Routines

- Spi_Ethernet_Init
- Spi_Ethernet_Enable
- Spi_Ethernet_Disable
- Spi_Ethernet_doPacket
- Spi_Ethernet_putByte
- Spi_Ethernet_putBytes
- Spi_Ethernet_putString
- Spi_Ethernet_putConstString
- Spi_Ethernet_putConstBytes
- Spi_Ethernet_getByte
- Spi_Ethernet_getBytes
- Spi_Ethernet_UserTCP
- Spi_Ethernet_UserUDP

Spi_Ethernet_Init

Prototype	`sub procedure Spi_Ethernet_Init(dim mac as ^byte, dim ip as ^byte, dim fullDuplex as byte)`
Returns	Nothing.
Description	This is MAC module routine. It initializes `ENC28J60` controller. This function is internaly splited into 2 parts to help linker when coming short of memory. `ENC28J60` controller settings (parameters not mentioned here are set to default): - receive buffer start address : `0x0000`. - receive buffer end address : `0x19AD`. - transmit buffer start address: `0x19AE`. - transmit buffer end address : `0x1FFF`. - RAM buffer read/write pointers in auto-increment mode. - receive filters set to default: CRC + MAC Unicast + MAC Broadcast in OR mode. - flow control with TX and RX pause frames in full duplex mode. - frames are padded to `60` bytes + CRC. - maximum packet size is set to `1518`. - Back-to-Back Inter-Packet Gap: `0x15` in full duplex mode; `0x12` in half duplex mode. - Non-Back-to-Back Inter-Packet Gap: `0x0012` in full duplex mode; `0x0C12` in half duplex mode. - Collision window is set to `63` in half duplex mode to accomodate some `ENC28J60` revisions silicon bugs. - CLKOUT output is disabled to reduce EMI generation. - half duplex loopback disabled. - LED configuration: default (LEDA-link status, LEDB-link activity).

Description	Parameters: - `mac:` RAM buffer containing valid MAC address. - `ip:` RAM buffer containing valid IP address. - `fullDuplex:` ethernet duplex mode switch. Valid values: `0` (half duplex mode) and `1` (full duplex mode).
Requires	The appropriate hardware SPI module must be previously initialized.

Example	`const Spi_Ethernet_HALFDUPLEX = 0`
	`const Spi_Ethernet_FULLDUPLEX = 1`
	
	`myMacAddr as byte[ 6]  ' my MAC address`
	`myIpAddr  as byte[ 4]  ' my IP addr`
	`...`
	`myMacAddr[ 0]  = 0x00`
	`myMacAddr[ 1]  = 0x14`
	`myMacAddr[ 2]  = 0xA5`
	`myMacAddr[ 3]  = 0x76`
	`myMacAddr[ 4]  = 0x19`
	`myMacAddr[ 5]  = 0x3F`
	
	`myIpAddr[ 0]  = 192`
	`myIpAddr[ 1]  = 168`
	`myIpAddr[ 2]  = 20`
	`myIpAddr[ 3]  = 60`
	
	`Spi_Init()`
	`Spi_Ethernet_Init(PORTC, 0, PORTC, 1, myMacAddr, myIpAddr, Spi_Ethernet_FULLDUPLEX)`

Spi_Ethernet_Enable

Prototype	`sub procedure Spi_Ethernet_Enable(dim enFlt as byte)`
Returns	Nothing.
Description	This is MAC module routine. This routine enables appropriate network traffic on the ENC28J60 module by the means of it's receive filters (unicast, multicast, broadcast, crc). Specific type of network traffic will be enabled if a corresponding bit of this routine's input parameter is set. Therefore, more than one type of network traffic can be enabled at the same time. For this purpose, predefined library constants (see the table below) can be ORed to form appropriate input value. Parameters: - `enFlt:` network traffic/receive filter flags. Each bit corresponds to the appropriate network traffic/receive filter:

Bit	Mask	Description	Predefined library const
0	0x01	MAC Broadcast traffic/receive filter flag. When set, MAC broadcast traffic will be enabled.	Spi_Ethernet_BROADCAST
1	0x02	MAC Multicast traffic/receive filter flag. When set, MAC multicast traffic will be enabled.	Spi_Ethernet_MULTICAST
2	0x04	not used	none
3	0x08	not used	none
4	0x10	not used	none
5	0x20	CRC check flag. When set, packets with invalid CRC field will be discarded.	Spi_Ethernet_CRC
6	0x40	not used	none
7	0x80	MAC Unicast traffic/receive filter flag. When set, MAC unicast traffic will be enabled.	Spi_Ethernet_UNICAST

Description	**Note:** Advance filtering available in the ENC28J60 module such as Pattern Match, Magic Packet and Hash Table can not be enabled by this routine. Additionaly, all filters, except CRC, enabled with this routine will work in OR mode, which means that packet will be received if any of the enabled filters accepts it. **Note:** This routine will change receive filter configuration on-the-fly. It will not, in any way, mess with enabling/disabling receive/transmit logic or any other part of the ENC28J60 module. The ENC28J60 module should be properly cofigured by the means of Spi_Ethernet_Init routine.
Requires	Ethernet module has to be initialized. See Spi_Ethernet_Init.
Example	`Spi_Ethernet_Enable(Spi_Ethernet_CRC or Spi_Ethernet_UNICAST) ' enable CRC checking and Unicast traffic`

Spi_Ethernet_Disable

Prototype	`sub procedure Spi_Ethernet_Disable(dim disFlt as byte)`
Returns	Nothing.
Description	This is MAC module routine. This routine disables appropriate network traffic on the ENC28J60 module by the means of it's receive filters (unicast, multicast, broadcast, crc). Specific type of network traffic will be disabled if a corresponding bit of this routine's input parameter is set. Therefore, more than one type of network traffic can be disabled at the same time. For this purpose, predefined library constants (see the table below) can be ORed to form appropriate input value. Parameters: - `disFlt:` network traffic/receive filter flags. Each bit corresponds to the appropriate network traffic/receive filter:

Description

Bit	Mask	Description	Predefined library const
0	0x01	MAC Broadcast traffic/receive filter flag. When set, MAC broadcast traffic will be disabled.	Spi_Ethernet_BROADCAST
1	0x02	MAC Multicast traffic/receive filter flag. When set, MAC multicast traffic will be disabled.	Spi_Ethernet_MULTICAST
2	0x04	not used	none
3	0x08	not used	none
4	0x10	not used	none
5	0x20	CRC check flag. When set, CRC check will be disabled and packets with invalid CRC field will be accepted.	Spi_Ethernet_CRC
6	0x40	not used	none
7	0x80	MAC Unicast traffic/receive filter flag. When set, MAC unicast traffic will be disabled.	Spi_Ethernet_UNICAST

Note: Advance filtering available in the ENC28J60 module such as Pattern Match, Magic Packet and Hash Table can not be disabled by this routine.

Note: This routine will change receive filter configuration on-the-fly. It will not, in any way, mess with enabling/disabling receive/transmit logic or any other part of the ENC28J60 module. The ENC28J60 module should be properly cofigured by the means of Spi_Ethernet_Init routine.

Requires

Ethernet module has to be initialized. See Spi_Ethernet_Init.

Example

```
Spi_Ethernet_Disable(Spi_Ethernet_CRC or Spi_Ethernet_UNICAST) ' disable CRC checking and Unicast traffic
```

Spi_Ethernet_doPacket

Prototype	`sub function Spi_Ethernet_doPacket() as byte`
Returns	- `0` - upon successful packet processing (zero packets received or received packet processed successfully). - `1` - upon reception error or receive buffer corruption. `ENC28J60` controller needs to be restarted. - `2` - received packet was not sent to us (not our IP, nor IP broadcast address). - `3` - received IP packet was not IPv4. - `4` - received packet was of type unknown to the library.
Description	This is MAC module routine. It processes next received packet if such exists. Packets are processed in the following manner: - ARP & ICMP requests are replied automatically. - upon TCP request the Spi_Ethernet_UserTCP function is called for further processing. - upon UDP request the Spi_Ethernet_UserUDP function is called for further processing. **Note:** `Spi_Ethernet_doPacket` must be called as often as possible in user's code.
Requires	Ethernet module has to be initialized. See Spi_Ethernet_Init.

Example	`while TRUE`
	`  ...`
	`  Spi_Ethernet_doPacket() ' process received packets`
	`  ...`
	`wend`

Spi_Ethernet_putByte

Prototype	`sub procedure Spi_Ethernet_putByte(dim v as byte)`
Returns	Nothing.
Description	This is MAC module routine. It stores one byte to address pointed by the current ENC28J60 write pointer (EWRPT). Parameters: - v: value to store
Requires	Ethernet module has to be initialized. See Spi_Ethernet_Init.

Example	`dim data as byte`
	`...`
	`Spi_Ethernet_putByte(data) ' put an byte into ENC28J60 buffer`

Spi_Ethernet_putBytes

Prototype	`sub procedure Spi_Ethernet_putBytes(dim ptr as ^byte, dim n as byte)`
Returns	Nothing.
Description	This is MAC module routine. It stores requested number of bytes into ENC28J60 RAM starting from current ENC28J60 write pointer (EWRPT) location. Parameters: - ptr: RAM buffer containing bytes to be written into ENC28J60 RAM. - n: number of bytes to be written.
Requires	Ethernet module has to be initialized. See Spi_Ethernet_Init.

Example	`dim`
	`  buffer as byte[ 17]`
	`  ...`
	`  buffer = "mikroElektronika"`
	`  ...`
	`  Spi_Ethernet_putBytes(buffer, 16) ' put an RAM array into ENC28J60 buffer`

Spi_Ethernet_putConstBytes

Prototype	`sub procedure Spi_Ethernet_putConstBytes(const ptr as ^byte, dim n as byte)`
Returns	Nothing.
Description	This is MAC module routine. It stores requested number of const bytes into ENC28J60 RAM starting from current ENC28J60 write pointer (EWRPT) location. Parameters: - ptr: const buffer containing bytes to be written into ENC28J60 RAM. - n: number of bytes to be written.
Requires	Ethernet module has to be initialized. See Spi_Ethernet_Init.

Example	`const`
	`  buffer as byte[ 17]`
	`  ...`
	`  buffer = "mikroElektronika"`
	`  ...`
	`  Spi_Ethernet_putConstBytes(buffer, 16) ' put a const array into ENC28J60 buffer`

Spi_Ethernet_putString

Prototype	`sub function Spi_Ethernet_putString(dim ptr as ^byte) as word`
Returns	Number of bytes written into ENC28J60 RAM.
Description	This is MAC module routine. It stores whole string (excluding null termination) into ENC28J60 RAM starting from current ENC28J60 write pointer (EWRPT) location. Parameters: - ptr: string to be written into ENC28J60 RAM.
Requires	Ethernet module has to be initialized. See Spi_Ethernet_Init.

Example	`dim`
	`  buffer as string[ 16]`
	`  ...`
	`  buffer = "mikroElektronika"`
	`  ...`
	`  Spi_Ethernet_putString(buffer) ' put a RAM string into ENC28J60 buffer`

Spi_Ethernet_putConstString

Prototype	`sub function Spi_Ethernet_putConstString(const ptr as ^byte) as word`
Returns	Number of bytes written into ENC28J60 RAM.
Description	This is MAC module routine. It stores whole const string (excluding null termination) into `ENC28J60` RAM starting from current `ENC28J60` write pointer (`EWRPT`) location. Parameters: - `ptr:` const string to be written into ENC28J60 RAM.
Requires	Ethernet module has to be initialized. See Spi_Ethernet_Init.

Example	`const`
	`  buffer as string[ 16]`
	`  ...`
	`  buffer = "mikroElektronika"`
	`  ...`
	`  Spi_Ethernet_putConstString(buffer) ' put a const string into ENC28J60 buffer`

Spi_Ethernet_getByte

Prototype	`sub function Spi_Ethernet_getByte() as byte`
Returns	Byte read from ENC28J60 RAM.
Description	This is MAC module routine. It fetches a byte from address pointed to by current ENC28J60 read pointer (ERDPT).
Requires	Ethernet module has to be initialized. See Spi_Ethernet_Init.

Example	`dim buffer as byte<>`
	`...`
	`buffer = Spi_Ethernet_getByte() ' read a byte from ENC28J60 buffer`

Spi_Ethernet_getBytes

Prototype	`sub procedure Spi_Ethernet_getBytes(dim ptr as ^byte, dim addr as word, dim n as byte)`
Returns	Nothing.
Description	This is MAC module routine. It fetches equested number of bytes from `ENC28J60` RAM starting from given address. If value of `0xFFFF` is passed as the address parameter, the reading will start from current `ENC28J60` read pointer (`ERDPT`) location. Parameters: - `ptr:` buffer for storing bytes read from `ENC28J60` RAM. - `addr:` `ENC28J60` RAM start address. Valid values: `0..8192`. - `n:` number of bytes to be read.
Requires	Ethernet module has to be initialized. See Spi_Ethernet_Init.

Example	`dim`
	`  buffer as byte[ 16]`
	`  ...`
	`  Spi_Ethernet_getBytes(buffer, 0x100, 16) ' read 16 bytes, starting from address 0x100`

Spi_Ethernet_UserTCP

Prototype	`sub function Spi_Ethernet_UserTCP(dim remoteHost as ^byte, dim remotePort as word, dim localPort as word, dim reqLength as word) as word`
Returns	- `0` - there should not be a reply to the request. - Length of TCP/HTTP reply data field - otherwise.
Description	This is TCP module routine. It is internally called by the library. The user accesses to the TCP/HTTP request by using some of the Spi_Ethernet_get routines. The user puts data in the transmit buffer by using some of the Spi_Ethernet_put routines. The function must return the length in bytes of the TCP/HTTP reply, or 0 if there is nothing to transmit. If there is no need to reply to the TCP/HTTP requests, just define this function with return(0) as a single statement. Parameters: - `remoteHost:` client's IP address. - `remotePort:` client's TCP port. - `localPort:` port to which the request is sent. - `reqLength:` TCP/HTTP request data field length. **Note:** The function source code is provided with appropriate example projects. The code should be adjusted by the user to achieve desired reply.
Requires	Ethernet module has to be initialized. See Spi_Ethernet_Init.
Example	This function is internally called by the library and should not be called by the user's code.

Spi_Ethernet_UserUDP

Prototype	`sub function Spi_Ethernet_UserUDP(dim remoteHost as ^byte, dim remotePort as word, dim destPort as word, dim reqLength as word) as word`
Returns	- `0` - there should not be a reply to the request. - Length of UDP reply data field - otherwise.
Description	This is UDP module routine. It is internally called by the library. The user accesses to the UDP request by using some of the Spi_Ethernet_get routines. The user puts data in the transmit buffer by using some of the Spi_Ethernet_put routines. The function must return the length in bytes of the UDP reply, or 0 if nothing to transmit. If you don't need to reply to the UDP requests, just define this function with a return(0) as single statement. Parameters: - `remoteHost:` client's IP address. - `remotePort:` client's port. - `destPort:` port to which the request is sent. - `reqLength:` UDP request data field length. **Note:** The function source code is provided with appropriate example projects. The code should be adjusted by the user to achieve desired reply.
Requires	Ethernet module has to be initialized. See Spi_Ethernet_Init.
Example	This function is internally called by the library and should not be called by the user's code.

Library Example

This code shows how to use the AVR mini Ethernet library :

- the board will reply to ARP & ICMP echo requests
- the board will reply to UDP requests on any port :
  returns the request in upper char with a header made of remote host IP & port number
- the board will reply to HTTP requests on port 80, GET method with pathnames :

  / will return the HTML main page
  /s will return board status as text string
  /t0 ... /t7 will toggle P3.b0 to P3.b7 bit and return HTML main page
  all other requests return also HTML main page.

Main program code:

```
include eth_enc28j60_utils 'this is where you should write implemen-
tation for UDP and HTTP
'*********************************
'* RAM variables
'*
'*********************************
dim myMacAddr    as byte[ 6]      ' my MAC address
    myIpAddr     as byte[ 4]      ' my IP address
    gwIpAddr     as byte[ 4]      ' gateway (router) IP address
     ipMask         as byte[ 4]        ' network mask (for example :
255.255.255.0)
    dnsIpAddr    as byte[ 4]      ' DNS server IP address

' mE ehternet NIC pinout
  SPI_Ethernet_Rst as sbit at PORTB.B4
  SPI_Ethernet_CS  as sbit at PORTB.B5
  SPI_Ethernet_Rst_Direction as sbit at DDRB.B4
  SPI_Ethernet_CS_Direction  as sbit at DDRB.B5
' end ethernet NIC definitions

dim i as word

main:
  ' set PORTC as input
  DDRC = 0
  ' set PORTD as output
  DDRD = 0xFF

  httpCounter = 0
```

```
  myMacAddr[ 0]  = 0x00
  myMacAddr[ 1]  = 0x14
  myMacAddr[ 2]  = 0xA5
  myMacAddr[ 3]  = 0x76
  myMacAddr[ 4]  = 0x19
  myMacAddr[ 5]  = 0x3F

  myIpAddr[ 0]  = 192
  myIpAddr[ 1]  = 168
  myIpAddr[ 2]  = 20
  myIpAddr[ 3]  = 60

  gwIpAddr[ 0]  = 192
  gwIpAddr[ 1]  = 168
  gwIpAddr[ 2]  = 20
  gwIpAddr[ 3]  = 6

  ipMask[ 0]  = 255
  ipMask[ 1]  = 255
  ipMask[ 2]  = 255
  ipMask[ 3]  = 0

  dnsIpAddr[ 0]  = 192
  dnsIpAddr[ 1]  = 168
  dnsIpAddr[ 2]  = 20
  dnsIpAddr[ 3]  = 1

'   *
'   * starts ENC28J60 with :
'   * reset bit on PORTB.B4
'   * CS bit on PORTB.B5
'   * my MAC & IP address
'   * full duplex
'   *

   SPI1_Init_Advanced(_SPI_MASTER,  _SPI_FCY_DIV2,  _SPI_CLK_LO_LEAD-
ING)
  SPI_Rd_Ptr = @SPI1_Read
  SPI_Ethernet_UserTCP_Ptr = @SPI_Ethernet_UserTCP
  SPI_Ethernet_UserUDP_Ptr = @SPI_Ethernet_UserUDP
  SPI_Ethernet_Init(myMacAddr, myIpAddr, SPI_Ethernet_FULLDUPLEX)

  ' dhcp will not be used here, so use preconfigured addresses
  SPI_Ethernet_confNetwork(ipMask, gwIpAddr, dnsIpAddr)

  while TRUE                    ' do forever
    SPI_Ethernet_doPacket()     ' process incoming Ethernet packets
    '*
    '* add your stuff here if needed
    '* SPI_Ethernet_doPacket() must be called as often as possible
    '* otherwise packets could be lost
    '*
  wend
end.
```

Module eth_enc28j60_utils code:

```
module eth_enc28j60_utils

'************************************************************
'* ROM constant strings
'************************************************************

const httpHeader as string[30] = "HTTP/1.1 200 OK"+chr(10)+"Content-
type: "    ' HTTP header
const httpMimeTypeHTML as string[13]    = "text/html"+chr(10)+chr(10)
' HTML MIME type
const       httpMimeTypeScript        as       string[14]        =
"text/plain"+chr(10)+chr(10)             ' TEXT MIME type
const httpMethod as string[5] = "GET /"
'*
'* web page, splited into 2 parts :
'* when coming short of ROM, fragmented data is handled more effi-
ciently by linker
'*
'* this HTML page calls the boards to get its status, and builds
itself with javascript
'*

const indexPage as string[513] =
                      "<meta http-equiv=" + Chr(34) + "refresh"  +
Chr(34) + " content="  + Chr(34) + "3;url=http://192.168.20.60"  +
Chr(34) + ">" +
                     "<HTML><HEAD></HEAD><BODY>"+
                     "<h1>AVR + ENC28J60 Mini Web Server</h1>"+
                     "<a href=/>Reload</a>"+
                     "<script src=/s></script>"+
                        "<table><tr><td valign=top><table border=1
style="+chr(34)+"font-size:20px       ;font-family:       terminal
;"+chr(34)+">"+
                     "<tr><th colspan=2>PINC</th></tr>"+
                     "<script>"+
                     "var str,i;"+
                     "str="+chr(34)+chr(34)+";"+
                     "for(i=0;i<8;i++)"+
                      "{ str+="+chr(34)+"<tr><td bgcolor=pink>BUTTON
#"+chr(34)+"+i+"+chr(34)+"</td>"+chr(34)+";"+
                                "if(PINC&(1<<i)){ str+="+chr(34)+"<td
bgcolor=red>ON"+chr(34)+";} "+
                                                "else  { str+="+chr(34)+"<td
bgcolor=#cccccc>OFF"+chr(34)+";} "+
                     "str+="+chr(34)+"</td></tr>"+chr(34)+";} "+
                     "document.write(str) ;"+
                     "</script>"
```

```
const indexPage2 as string[466] =
                      "</table></td><td>"+
                     "<table border=1 style="+chr(34)+"font-size:20px
;font-family: terminal ;"+chr(34)+">"+
                      "<tr><th colspan=3>PORTD</th></tr>"+
                      "<script>"+
                      "var str,i;"+
                      "str="+chr(34)+chr(34)+";"+
                      "for(i=0;i<8;i++)"+
                        "{ str+="+chr(34)+"<tr><td bgcolor=yellow>LED
#"+chr(34)+"+i+"+chr(34)+"</td>"+chr(34)+";"+
                                "if(PORTD&(1<<i)){ str+="+chr(34)+"<td
bgcolor=red>ON"+chr(34)+";} "+
                                          "else  { str+="+chr(34)+"<td
bgcolor=#cccccc>OFF"+chr(34)+";} "+
                                        "str+="+chr(34)+"</td><td><a
href=/t"+chr(34)+"+i+"+chr(34)+">Toggle</a></td></tr>"+chr(34)+";} "+
                      "document.write(str) ;"+
                      "</script>"+
                      "</table></td></tr></table>"+
                                            "This  is  HTTP  request
#<script>document.write(REQ)</script></BODY></HTML>"

dim     getRequest  as byte[15]   ' HTTP request buffer
        dyna        as byte[31]   ' buffer for dynamic response
        httpCounter as word       ' counter of HTTP requests

sub function SPI_Ethernet_UserTCP(dim byref remoteHost as byte[4],
dim remotePort, localPort, reqLength as word) as word
sub function SPI_Ethernet_UserUDP(dim byref remoteHost as byte[4],
dim remotePort, destPort, reqLength as word) as word

implements
'*****************************************
'* user defined sub functions
'*

'*
'* put the constant string pointed to by s to the ENC transmit buffer
'*
sub function putConstString (dim const s as ^byte) as word
  result = 0
  while(s^ <> 0)
    SPI_Ethernet_putByte(s^)
    Inc(s)
    Inc(result)
  wend
end sub
```

```
'*
'* put the string pointed to by s to the ENC transmit buffer
'*
sub function putString(dim byref s as byte[100]) as word
  result = 0
  while(s[result] <> 0)
    SPI_Ethernet_putByte(s[result])
    Inc(result)
  wend
end sub
'*
'* this sub function is called by the library
'* the user accesses to the HTTP request by successive calls to
SPI_Ethernet_getByte()
'* the user puts data in the transmit buffer by successive calls to
SPI_Ethernet_putByte()
'* the sub function must return the length in bytes of the HTTP reply,
or 0 if nothing to transmit
'*
'* if you don"t need to reply to HTTP requests,
'* just define this sub function with a return(0) as single state-
ment
'*
'*
sub function Spi_Ethernet_UserTCP(dim byref remoteHost as byte[4],
                                  dim remotePort, localPort, reqLength
as word) as word
  dim  len_ as word        ' my reply length
       bitMask as byte     ' for bit mask
       tmp as byte[5]      ' to copy const array to ram for memcmp


    len_ = 0
    if(localPort <> 80) then  ' I listen only to web request on port 80
      result = 0
      exit
    end if

    ' get 10 first bytes only of the request, the rest does not mat-
ter here
    for len_ = 0 to 9
      getRequest[len_] = SPI_Ethernet_getByte()
    next len_
    getRequest[len_] = 0
    len_ = 0

    while (httpMethod[len_] <> 0)
      tmp[len_] = httpMethod[len_]
      Inc(len_)
    wend
    len_ = 0
```

```
if(memcmp (@getRequest, @tmp, 5) <> 0) then   ' only GET method is
supported here
       result = 0
       exit
     end if

     httpCounter = httpCounter + 1         ' one more request done

     if(getRequest[ 5] = "s") then                   ' if request path
name starts with s, store dynamic data in transmit buffer
       ' the text string replied by this request can be interpreted
as javascript statements
       ' by browsers
       len_ = putConstString(@httpHeader)   ' HTTP header
      len_ = len_ + putConstString(@httpMimeTypeScript)   ' with text
MIME type

       ' add PORTC value (buttons) to reply
       len_ = len_ + putString("var PINC=   ")
       WordToStr(PINC, dyna)
       len_ = len_ + putString(dyna)
       len_ = len_ + putString(";")

       ' add PORTD value (LEDs) to reply
       len_ = len_ + putString("var PORTD= ")
       WordToStr(PORTD, dyna)
       len_ = len_ + putString(dyna)
       len_ = len_ + putString(";")

       ' add HTTP requests counter to reply
       WordToStr(httpCounter, dyna)
       len_ = len_ + putString("var REQ=    ")
       len_ = len_ + putString(dyna)
       len_ = len_ + putString(";")
     else
       if(getRequest[ 5] = "t") then                 ' if request path
name starts with t, toggle PORTD (LED) bit number that comes after
         bitMask = 0
         if(isdigit(getRequest[ 6] ) <> 0) then             ' if 0 <=
bit number <= 9, bits 8 & 9 does not exist but does not matter
           bitMask = getRequest[ 6] - "0"             ' convert ASCII
to integer
           bitMask = 1 << bitMask              ' create bit mask
           PORTD   = PORTD xor bitMask                ' toggle PORTD
with xor operator
         end if
       end if
     end if
```

```
 if(len_ = 0) then                          ' what do to by default
       len_ = putConstString(@httpHeader)          ' HTTP header
       len_ = len_ + putConstString(@httpMimeTypeHTML)    ' with HTML
MIME type
      len_ = len_ + putConstString(@indexPage) ' HTML page first part
       len_ = len_ + putConstString(@indexPage2)          ' HTML page
second part
     end if
     result = len_                     ' return to the library with the
number of bytes to transmit
end sub
' *
' * this sub function is called by the library
' *  the user accesses to the UDP request by successive calls to
SPI_Ethernet_getByte()
' * the user puts data in the transmit buffer by successive calls to
SPI_Ethernet_putByte()
' * the sub function must return the length in bytes of the UDP reply,
or 0 if nothing to transmit
' *
' * if you don"t need to reply to UDP requests,
' * just define this sub function with a return(0) as single state-
ment
' *
' *
sub function Spi_Ethernet_UserUDP(dim byref remoteHost as byte[ 4] ,
                                  dim remotePort, destPort, reqLength
as word) as word
  dim len_ as word                  ' my reply length
       ptr as ^byte                 ' pointer to the dynamic buffer
       tmp as string[ 5]

     ' reply is made of the remote host IP address in human readable
format
     byteToStr(remoteHost[ 0] , dyna)    ' first IP address byte
     dyna[ 3]  = "."

     byteToStr(remoteHost[ 1] , tmp)     ' second
     dyna[ 4]  = tmp[ 0]
     dyna[ 5]  = tmp[ 1]
     dyna[ 6]  = tmp[ 2]
     dyna[ 7]  = "."

     byteToStr(remoteHost[ 2] , tmp)     ' second
     dyna[ 8]  = tmp[ 0]
     dyna[ 9]  = tmp[ 1]
     dyna[ 10]  = tmp[ 2]
     dyna[ 11]  = "."
```

```
    byteToStr(remoteHost[3], tmp)     ' second
    dyna[12] = tmp[0]
    dyna[13] = tmp[1]
    dyna[14] = tmp[2]

    dyna[15] = ":"                    ' add separator

    ' then remote host port number
    WordToStr(remotePort, tmp)
    dyna[16] = tmp[0]
    dyna[17] = tmp[1]
    dyna[18] = tmp[2]
    dyna[19] = tmp[3]
    dyna[20] = tmp[4]
    dyna[21] = " "
    dyna[22] = "["

    WordToStr(destPort, tmp)
    dyna[23] = tmp[0]
    dyna[24] = tmp[1]
    dyna[25] = tmp[2]
    dyna[26] = tmp[3]
    dyna[27] = tmp[4]
    dyna[28] = "]"
    dyna[29] = " "
    dyna[30] = 0

    ' the total length of the request is the length of the dynamic
string plus the text of the request
    len_ = 30 + reqLength

    ' puts the dynamic string into the transmit buffer
    ptr = @dyna
    while (ptr^ <> 0)
      SPI_Ethernet_putByte(ptr^)
      ptr = ptr + 1
    wend

     ' then puts the request string converted into upper char into
the transmit buffer
    while(reqLength <> 0)
      SPI_Ethernet_putByte(SPI_Ethernet_getByte())
      reqLength = reqLength - 1
    wend

    result = len_             ' back to the library with the length
of the UDP reply
end sub

end.
```

HW Connection

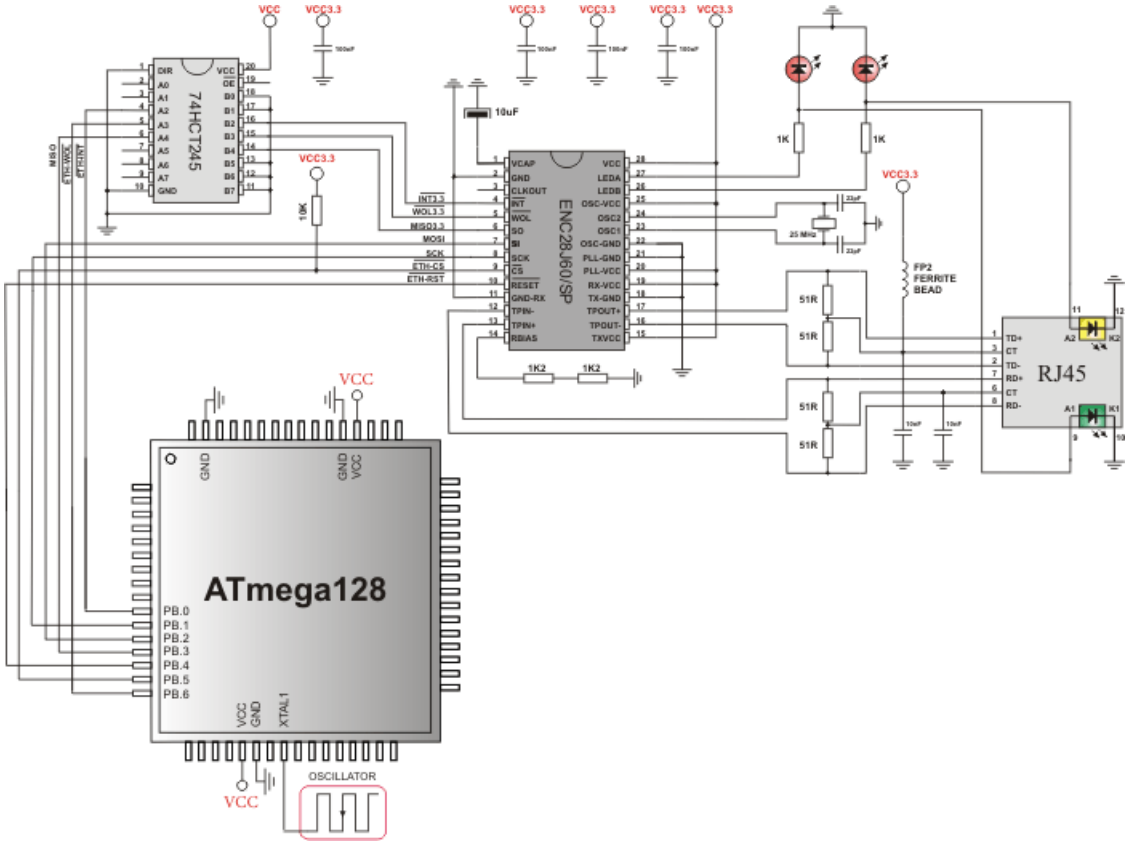

SPI GRAPHIC LCD LIBRARY

The mikroBasic PRO for AVR provides a library for operating Graphic Lcd 128x64 (with commonly used Samsung KS108/KS107 controller) via SPI interface.

For creating a custom set of Glcd images use Glcd Bitmap Editor Tool.

Note: The library uses the SPI module for communication. User must initialize SPI module before using the SPI Graphic Lcd Library.

Note: This Library is designed to work with the mikroElektronika's Serial Lcd/Glcd Adapter Board pinout, see schematic at the bottom of this page for details.

External dependencies of SPI Graphic Lcd Library

The implementation of SPI Graphic Lcd Library routines is based on Port Expander Library routines.

Prior to calling any of this library routines, Spi_Rd_Ptr needs to be initialized with the appropriate SPI_Read routine.

External dependencies are the same as Port Expander Library external dependencies.

Library Routines

Basic routines:

- SPI_Glcd_Init
- SPI_Glcd_Set_Side
- SPI_Glcd_Set_Page
- SPI_Glcd_Set_X
- SPI_Glcd_Read_Data
- SPI_Glcd_Write_Data

Advanced routines:

- SPI_Glcd_Fill
- SPI_Glcd_Dot
- SPI_Glcd_Line
- SPI_Glcd_V_Line
- SPI_Glcd_H_Line
- SPI_Glcd_Rectangle
- SPI_Glcd_Box
- SPI_Glcd_Circle
- SPI_Glcd_Set_Font
- SPI_Glcd_Write_Char
- SPI_Glcd_Write_Text
- SPI_Glcd_Image

SPI_Glcd_Init

Prototype	`sub procedure SPI_Glcd_Init(dim DeviceAddress as byte)`
Returns	Nothing.
Description	Initializes the Glcd module via SPI interface. Parameters : - `DeviceAddress:` SPI expander hardware address, see schematic at the bottom of this page
Requires	Global variables : - `SPExpanderCS:` Chip Select line - `SPExpanderRST:` Reset line - `SPExpanderCS_Direction:` Direction of the Chip Select pin - `SPExpanderRST_Direction:` Direction of the Reset pin must be defined before using this function. SPI module needs to be initialized. See SPI1_Init and SPI1_Init_Advanced routines.

Example	`' port expander pinout definition`
	`dim SPExpanderCS as sbit at PORTB.B1`
	`SPExpanderRST as sbit at PORTB.B0`
	`SPExpanderCS_Direction as sbit at DDRB.B1`
	`SPExpanderRST_Direction as sbit at DDRB.B0`
	`...`
	`' If Port Expander Library uses SPI1 module :`
	`SPI1_Init_Advanced(_SPI_MASTER, _SPI_FCY_DIV2, _SPI_CLK_HI_TRAIL-ING) ' Initialize SPI module used with PortExpander`
	`SPI_Rd_Ptr = @SPI1_Read ' Pass pointer to SPI Read function of used SPI module`
	`SPI_Glcd_Init(0)`

SPI_Glcd_Set_Side

Prototype	`sub procedure SPI_Glcd_Set_Side(dim x_pos as byte)`
Returns	Nothing.
Description	Selects Glcd side. Refer to the Glcd datasheet for detail explanation. Parameters : - `x_pos:` position on x-axis. Valid values: 0..127 The parameter `x_pos` specifies the Glcd side: values from 0 to 63 specify the left side, values from 64 to 127 specify the right side. **Note:** For side, x axis and page layout explanation see schematic at the bottom of this page.
Requires	Glcd needs to be initialized for SPI communication, see SPI_Glcd_Init routines.

Example	The following two lines are equivalent, and both of them select the left side of Glcd:
	
	`SPI_Glcd_Set_Side(0)`
	`SPI_Glcd_Set_Side(10)`

SPI_Glcd_Set_Page

Prototype	`sub procedure SPI_Glcd_Set_Page(dim page as byte)`
Returns	Nothing.
Description	Selects page of Glcd. Parameters : - `page:` page number. Valid values: 0..7 **Note:** For side, x axis and page layout explanation see schematic at the bottom of this page.
Requires	Glcd needs to be initialized for SPI communication, see SPI_Glcd_Init routines.
Example	`SPI_Glcd_Set_Page(5)`

SPI_Glcd_Set_X

Prototype	`sub procedure SPI_Glcd_Set_X(dim x_pos as byte)`
Returns	Nothing.
Description	Sets x-axis position to x_pos dots from the left border of Glcd within the selected side. Parameters : - `x_pos:` position on x-axis. Valid values: 0..63 **Note:** For side, x axis and page layout explanation see schematic at the bottom of this page.
Requires	Glcd needs to be initialized for SPI communication, see SPI_Glcd_Init routines.
Example	`SPI_Glcd_Set_X(25)`

SPI_Glcd_Read_Data

Prototype	`sub function SPI_Glcd_Read_Data() as byte`
Returns	One byte from Glcd memory.
Description	Reads data from the current location of Glcd memory and moves to the next location.
Requires	Glcd needs to be initialized for SPI communication, see SPI_Glcd_Init routines. Glcd side, x-axis position and page should be set first. See the functions SPI_Glcd_Set_Side, SPI_Glcd_Set_X, and SPI_Glcd_Set_Page.

Example	`dim data as byte`
	`...`
	`data = SPI_Glcd_Read_Data()`

SPI_Glcd_Write_Data

Prototype	`sub procedure SPI_Glcd_Write_Data(dim Ddata as byte)`
Returns	Nothing.
Description	Writes one byte to the current location in Glcd memory and moves to the next location. Parameters : - `Ddata:` data to be written
Requires	Glcd needs to be initialized for SPI communication, see SPI_Glcd_Init routines. Glcd side, x-axis position and page should be set first. See the functions SPI_Glcd_Set_Side, SPI_Glcd_Set_X, and SPI_Glcd_Set_Page.

Example	`dim ddata as byte`
	`...`
	`SPI_Glcd_Write_Data(ddata)`

SPI_Glcd_Fill

Prototype	`sub procedure SPI_Glcd_Fill(dim pattern as byte)`
Returns	Nothing.
Description	Fills Glcd memory with byte `pattern`. Parameters : - `pattern:` byte to fill Glcd memory with To clear the Glcd screen, use `SPI_Glcd_Fill(0)`. To fill the screen completely, use `SPI_Glcd_Fill(0xFF)`.
Requires	Glcd needs to be initialized for SPI communication, see SPI_Glcd_Init routines.
Example	`' Clear screen` `SPI_Glcd_Fill(0)`

SPI_Glcd_Dot

Prototype	`sub procedure SPI_Glcd_Dot(dim x_pos as byte, dim y_pos as byte, dim color as byte)`
Returns	Nothing.
Description	Draws a dot on Glcd at coordinates (`x_pos, y_pos`). Parameters : - `x_pos:` x position. Valid values: 0..127 - `y_pos:` y position. Valid values: 0..63 - `color:` colx_pos **as byte**; page_num **as byte**; color **as byte**) or parameter. Valid values: 0..2 The parameter `color` determines the dot state: 0 clears dot, 1 puts a dot, and 2 inverts dot state. **Note:** For x and y axis layout explanation see schematic at the bottom of this page.
Requires	Glcd needs to be initialized for SPI communication, see SPI_Glcd_Init routines.
Example	`' Invert the dot in the upper left corner` `SPI_Glcd_Dot(0, 0, 2)`

SPI_Glcd_Line

Prototype	`sub procedure SPI_Glcd_Line(dim x_start as integer, dim y_start as integer, dim x_end as integer, dim y_end as integer, dim color as byte)`
Returns	Nothing.
Description	Draws a line on Glcd. Parameters : - `x_start:` x coordinate of the line start. Valid values: 0..127 - `y_start:` y coordinate of the line start. Valid values: 0..63 - `x_end:` x coordinate of the line end. Valid values: 0..127 - `y_end:` y coordinate of the line end. Valid values: 0..63 - `color:` color parameter. Valid values: 0..2 Parameter color determines the line color: 0 white, 1 black, and 2 inverts each dot.
Requires	Glcd needs to be initialized for SPI communication, see SPI_Glcd_Init routines.
Example	`' Draw a line between dots (0,0) and (20,30)` `SPI_Glcd_Line(0, 0, 20, 30, 1)`

SPI_Glcd_V_Line

Prototype	`sub procedure SPI_Glcd_V_Line(dim y_start as byte, dim y_end as byte, dim x_pos as byte, dim color as byte)`
Returns	Nothing.
Description	Draws a vertical line on Glcd. Parameters : - `y_start:` y coordinate of the line start. Valid values: 0..63 - `y_end:` y coordinate of the line end. Valid values: 0..63 - `x_pos:` x coordinate of vertical line. Valid values: 0..127 - `color:` color parameter. Valid values: 0..2 Parameter color determines the line color: 0 white, 1 black, and 2 inverts each dot.
Requires	Glcd needs to be initialized for SPI communication, see SPI_Glcd_Init routines.
Example	`' Draw a vertical line between dots (10,5) and (10,25)` `SPI_Glcd_V_Line(5, 25, 10, 1)`

SPI_Glcd_H_Line

Prototype	`sub procedure SPI_Glcd_V_Line(dim x_start as byte, dim x_end as byte, dim y_pos as byte, dim color as byte)`
Returns	Nothing.
Description	Draws a horizontal line on Glcd. Parameters : - `x_start:` x coordinate of the line start. Valid values: 0..127 - `x_end:` x coordinate of the line end. Valid values: 0..127 - `y_pos:` y coordinate of horizontal line. Valid values: 0..63 - `color:` color parameter. Valid values: 0..2 The parameter color determines the line color: 0 white, 1 black, and 2 inverts each dot.
Requires	Glcd needs to be initialized for SPI communication, see SPI_Glcd_Init routines.
Example	`' Draw a horizontal line between dots (10,20) and (50,20)` `SPI_Glcd_H_Line(10, 50, 20, 1)`

SPI_Glcd_Rectangle

Prototype	`sub procedure SPI_Glcd_Rectangle(dim x_upper_left as byte, dim y_upper_left as byte, dim x_bottom_right as byte, dim y_bottom_right as byte, dim color as byte)`
Returns	Nothing.
Description	Draws a rectangle on Glcd. Parameters : - `x_upper_left:` x coordinate of the upper left rectangle corner. Valid values: 0..127 - `y_upper_left:` y coordinate of the upper left rectangle corner. Valid values: 0..63 - `x_bottom_right:` x coordinate of the lower right rectangle corner. Valid values: 0..127 - `y_bottom_right:` y coordinate of the lower right rectangle corner. Valid values: 0..63 - `color:` color parameter. Valid values: 0..2 The parameter `color` determines the color of the rectangle border: 0 white, 1 black, and 2 inverts each dot.
Requires	Glcd needs to be initialized for SPI communication, see SPI_Glcd_Init routines.
Example	`' Draw a rectangle between dots (5,5) and (40,40)` `SPI_Glcd_Rectangle(5, 5, 40, 40, 1)`

SPI_Glcd_Box

Prototype	`sub procedure SPI_Glcd_Box(dim x_upper_left as byte, dim y_upper_left as byte, dim x_bottom_right as byte, dim y_bottom_right as byte, dim color as byte)`
Returns	Nothing.
Description	Draws a box on Glcd. Parameters : - `x_upper_left:` x coordinate of the upper left box corner. Valid values: 0..127 - `y_upper_left:` y coordinate of the upper left box corner. Valid values: 0..63 - `x_bottom_right:` x coordinate of the lower right box corner. Valid values: 0..127 - `y_bottom_right:` y coordinate of the lower right box corner. Valid values: 0..63 - `color:` color parameter. Valid values: 0..2 The parameter `color` determines the color of the box fill: 0 white, 1 black, and 2 inverts each dot.
Requires	Glcd needs to be initialized for SPI communication, see SPI_Glcd_Init routines.
Example	`' Draw a box between dots (5,15) and (20,40)` `SPI_Glcd_Box(5, 15, 20, 40, 1)`

SPI_Glcd_Circle

Prototype	`sub procedure SPI_Glcd_Circle(dim x_center as integer, dim y_center as integer, dim radius as integer, dim color as byte)`
Returns	Nothing.
Description	Draws a circle on Glcd. Parameters : - `x_center:` x coordinate of the circle center. Valid values: 0..127 - `y_center:` y coordinate of the circle center. Valid values: 0..63 - `radius:` radius size - `color:` color parameter. Valid values: 0..2 The parameter `color` determines the color of the circle line: 0 white, 1 black, and 2 inverts each dot.
Requires	Glcd needs to be initialized for SPI communication, see SPI_Glcd_Init routine.
Example	`' Draw a circle with center in (50,50) and radius=10` `SPI_Glcd_Circle(50, 50, 10, 1)`

SPI_Glcd_Set_Font

Prototype	`sub procedure SPI_Glcd_Set_Font(dim activeFont as longint, dim aFontWidth as byte, dim aFontHeight as byte, dim aFontOffs as word)`
Returns	Nothing.
Description	Sets font that will be used with SPI_Glcd_Write_Char and SPI_Glcd_Write_Text routines. Parameters : - `activeFont:` font to be set. Needs to be formatted as an array of char - `aFontWidth:` width of the font characters in dots. - `aFontHeight:` height of the font characters in dots. - `aFontOffs:` number that represents difference between the mikroBasic PRO character set and regular ASCII set (eg. if 'A' is 65 in ASCII character, and 'A' is 45 in the mikroBasic PRO character set, aFontOffs is 20). Demo fonts supplied with the library have an offset of 32, which means that they start with space. The user can use fonts given in the file “__Lib_GLCD_fonts.mbas” file located in the Uses folder or create his own fonts.
Requires	Glcd needs to be initialized for SPI communication, see SPI_Glcd_Init routines.
Example	`' Use the custom 5x7 font "myfont" which starts with space (32):` `SPI_Glcd_Set_Font(@myfont, 5, 7, 32)`

SPI_Glcd_Write_Char

Prototype	`sub procedure SPI_Glcd_Write_Char(dim chr1 as byte, dim x_pos as byte, dim page_num as byte, dim color as byte)`
Returns	Nothing.
Description	Prints character on Glcd. Parameters : - `chr1:` character to be written - `x_pos:` character starting position on x-axis. Valid values: 0..(127-FontWidth) - `page_num:` the number of the page on which character will be written. Valid values: 0..7 - `color:` color parameter. Valid values: 0..2 The parameter `color` determines the color of the character: 0 white, 1 black, and 2 inverts each dot. **Note:** For x axis and page layout explanation see schematic at the bottom of this page.
Requires	Glcd needs to be initialized for SPI communication, see SPI_Glcd_Init routines. Use the SPI_Glcd_Set_Font to specify the font for display; if no font is specified, then the default 5x8 font supplied with the library will be used.
Example	`' Write character 'C' on the position 10 inside the page 2:` `SPI_Glcd_Write_Char("C", 10, 2, 1)`

SPI_Glcd_Write_Text

Prototype	`sub procedure SPI_Glcd_Write_Text(dim byref text as string[ 40] , dim x_pos as byte, dim page_numb as byte, dim color as byte)`
Returns	Nothing.
Description	Prints text on Glcd. Parameters : - `text:` text to be written - `x_pos:` text starting position on x-axis. - `page_num:` the number of the page on which text will be written. Valid values: 0..7 - `color:` color parameter. Valid values: 0..2 The parameter `color` determines the color of the text: 0 white, 1 black, and 2 inverts each dot. **Note:** For x axis and page layout explanation see schematic at the bottom of this page.
Requires	Glcd needs to be initialized for SPI communication, see SPI_Glcd_Init routines. Use the SPI_Glcd_Set_Font to specify the font for display; if no font is specified, then the default 5x8 font supplied with the library will be used.
Example	`' Write text "Hello world!" on the position 10 inside the page 2:` `SPI_Glcd_Write_Text("Hello world!", 10, 2, 1)`

SPI_Glcd_Image

Prototype	`sub procedure SPI_Glcd_Image(dim const image as ^byte)`
Returns	Nothing.
Description	Displays bitmap on Glcd. Parameters : - `image:` image to be displayed. Bitmap array can be located in both code and RAM memory (due to the mikroBasic PRO for AVR pointer to const and pointer to RAM equivalency). Use the mikroBasic PRO's integrated Glcd Bitmap Editor (menu option **Tools › Glcd Bitmap Editor**) to convert image to a constant array suitable for displaying on Glcd.
Requires	Glcd needs to be initialized for SPI communication, see SPI_Glcd_Init routines.
Example	`' Draw image my_image on Glcd` `SPI_Glcd_Image(my_image)`

Library Example

The example demonstrates how to communicate to KS0108 Glcd via the SPI module, using serial to parallel convertor MCP23S17.

```
program SPI_Glcd

include bitmap

' Port Expander module connections
dim SPExpanderRST as sbit at PORTB.0
    SPExpanderCS  as sbit at PORTB.1
    SPExpanderRST_Direction as sbit at DDRB.0
    SPExpanderCS_Direction  as sbit at DDRB.1
' End Port Expander module connections

dim someText as char[20]
    counter as byte

sub procedure Delay2S
  delay_ms(2000)
end sub
```

```
main:
  ' If Port Expander Library uses SPI1 module
   SPI1_Init_Advanced(_SPI_MASTER, _SPI_FCY_DIV2, _SPI_CLK_HI_TRAIL-
ING)  ' Initialize SPI module used with PortExpander
  Spi_Rd_Ptr = @SPI1_Read                          ' Pass pointer to
SPI Read sub function of used SPI module

  ' ' If Port Expander Library uses SPI2 module
         '     SPI2_Init_Advanced(_SPI_MASTER,     _SPI_FCY_DIV2,
_SPI_CLK_HI_TRAILING)  ' Initialize SPI module used with PortExpander
  ' Spi_Rd_Ptr = &SPI2_Read                         ' Pass pointer to
SPI Read sub function of used SPI module

  SPI_Glcd_Init(0)                                 ' Initialize Glcd
via SPI
  SPI_Glcd_Fill(0x00)                              ' Clear Glcd

  while TRUE
    SPI_Glcd_Image(@truck_bmp)                    ' Draw image
    Delay2s() Delay2s()

    SPI_Glcd_Fill(0x00)                            ' Clear Glcd
    Delay2s

    SPI_Glcd_Box(62,40,124,56,1)                  ' Draw box
    SPI_Glcd_Rectangle(5,5,84,35,1)               ' Draw rectangle
    SPI_Glcd_Line(0, 63, 127, 0,1)                ' Draw line
    Delay2s()
    counter = 5
    while (counter < 60)                           ' Draw horizontal
and vertical line
      Delay_ms(250)
      SPI_Glcd_V_Line(2, 54, counter, 1)
      SPI_Glcd_H_Line(2, 120, counter, 1)
      counter = counter + 5
    wend
    Delay2s()

    SPI_Glcd_Fill(0x00)                            ' Clear Glcd
      SPI_Glcd_Set_Font(@Character8x7, 8, 8, 32)    ' Choose font
"Character8x7"
    SPI_Glcd_Write_Text("mikroE", 5, 7, 2)        ' Write string

    for counter = 1 to 10 ' Draw circles
      SPI_Glcd_Circle(63,32, 3*counter, 1)
    next counter
    Delay2s()

    SPI_Glcd_Box(12,20, 70,63, 2)                 ' Draw box
    Delay2s()
```

```
    SPI_Glcd_Fill(0xFF)                              ' Fill Glcd

    SPI_Glcd_Set_Font(@Character8x7, 8, 7, 32)   ' Change font
    someText = "8x7 Font"
    SPI_Glcd_Write_Text(someText, 5, 1, 2)       ' Write string
    Delay2s()

    SPI_Glcd_Set_Font(@System3x6, 3, 5, 32)      ' Change font
    someText = "3X5 CAPITALS ONLY"
    SPI_Glcd_Write_Text(someText, 5, 3, 2)       ' Write string
    Delay2s()

    SPI_Glcd_Set_Font(@font5x7, 5, 7, 32)        ' Change font
    someText = "5x7 Font"
    SPI_Glcd_Write_Text(someText, 5, 5, 2)       ' Write string
    Delay2s()

    SPI_Glcd_Set_Font(@FontSystem5x7_v2, 5, 7, 32) ' Change font
    someText = "5x7 Font (v2)"
    SPI_Glcd_Write_Text(someText, 5, 7, 2)          ' Write string
    Delay2s()
  wend
end.
```

HW Connection

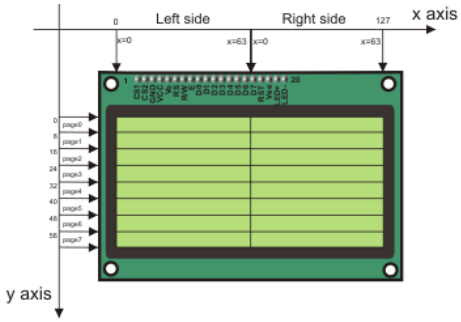

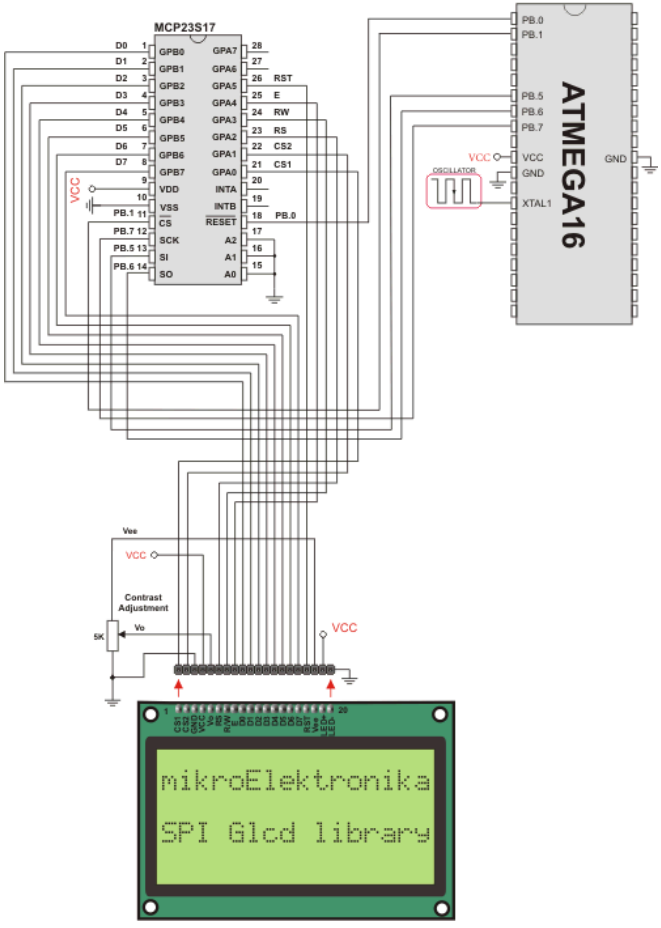

SPI Glcd HW connection

SPI LCD LIBRARY

The mikroBasic PRO for AVR provides a library for communication with Lcd (with HD44780 compliant controllers) in 4-bit mode via SPI interface.

For creating a custom set of Lcd characters use Lcd Custom Character Tool.

Note: The library uses the SPI module for communication. The user must initialize the SPI module before using the SPI Lcd Library.

Note: This Library is designed to work with the mikroElektronika's Serial Lcd Adapter Board pinout. See schematic at the bottom of this page for details.

External dependencies of SPI Lcd Library

The implementation of SPI Lcd Library routines is based on Port Expander Library routines.

Prior to calling any of this library routines, Spi_Rd_Ptr needs to be initialized with the appropriate SPI_Read routine.

External dependencies are the same as Port Expander Library external dependencies.

Library Routines

- SPI_Lcd_Config
- SPI_Lcd_Out
- SPI_Lcd_Out_Cp
- SPI_Lcd_Chr
- SPI_Lcd_Chr_Cp
- SPI_Lcd_Cmd

SPI_Lcd_Config

Prototype	`sub procedure SPI_Lcd_Config(dim DeviceAddress as byte)`
Returns	Nothing.
Description	Initializes the Lcd module via SPI interface. Parameters : - `DeviceAddress:` spi expander hardware address, see schematic at the bottom of this page
Requires	Global variables : - `SPExpanderCS:` Chip Select line - `SPExpanderRST:` Reset line - `SPExpanderCS_Direction:` Direction of the Chip Select pin - `SPExpanderRST_Direction:` Direction of the Reset pin must be defined before using this function. SPI module needs to be initialized. See SPI1_Init and SPI1_Init_Advanced routines.

Example	`' port expander pinout definition`
	`dim SPExpanderCS as sbit at PORTB.B1`
	`SPExpanderRST as sbit at PORTB.B0`
	`SPExpanderCS_Direction as sbit at DDRB.B1`
	`SPExpanderRST_Direction as sbit at DDRB.B0`
	`...`
	`' If Port Expander Library uses SPI1 module`
	`SPI1_Init()  ' Initialize SPI module used with PortExpander`
	`Spi_Rd_Ptr = @SPI1_Read  ' Pass pointer to SPI Read function of used SPI module`
	`SPI_Lcd_Config(0)  ' initialize lcd over spi interface`

SPI_Lcd_Out

Prototype	`sub procedure SPI_Lcd_Out(dim row as byte, dim column as byte, dim byref text as string[20])`
Returns	Nothing.
Description	Prints text on the Lcd starting from specified position. Both string variables and literals can be passed as a text. Parameters : - `row:` starting position row number - `column:` starting position column number - `text:` text to be written
Requires	Lcd needs to be initialized for SPI communication, see SPI_Lcd_Config routines.
Example	`' Write text "Hello!" on Lcd starting from row 1, column 3:` `SPI_Lcd_Out(1, 3, "Hello!")`

SPI_Lcd_Out_Cp

Prototype	`sub procedure SPI_Lcd_Out_CP(dim text as string[19])`
Returns	Nothing.
Description	Prints text on the Lcd at current cursor position. Both string variables and literals can be passed as a text. Parameters : - `text:` text to be written
Requires	Lcd needs to be initialized for SPI communication, see SPI_Lcd_Config routines.
Example	`' Write text "Here!" at current cursor position:` `SPI_Lcd_Out_CP("Here!")`

SPI_Lcd_Chr

Prototype	`sub procedure SPI_Lcd_Chr(dim Row as byte, dim Column as byte, dim Out_Char as byte)`
Returns	Nothing.
Description	Prints character on Lcd at specified position. Both variables and literals can be passed as character. Parameters : - `Row:` writing position row number - `Column:` writing position column number - `Out_Char:` character to be written
Requires	Lcd needs to be initialized for SPI communication, see SPI_Lcd_Config routines.
Example	`' Write character "i" at row 2, column 3:` `SPI_Lcd_Chr(2, 3, 'i')`

SPI_Lcd_Chr_Cp

Prototype	`sub procedure SPI_Lcd_Chr_CP(dim Out_Char as byte)`
Returns	Nothing.
Description	Prints character on Lcd at current cursor position. Both variables and literals can be passed as character. Parameters : - `Out_Char:` character to be written
Requires	Lcd needs to be initialized for SPI communication, see SPI_Lcd_Config routines.
Example	`' Write character "e" at current cursor position:` `SPI_Lcd_Chr_Cp('e')`

SPI_Lcd_Cmd

Prototype	`sub procedure SPI_Lcd_Cmd(dim out_char as byte)`
Returns	Nothing.
Description	Sends command to Lcd. Parameters : - `out_char:` command to be sent **Note:** Predefined constants can be passed to the function, see Available SPI Lcd Commands.
Requires	Lcd needs to be initialized for SPI communication, see SPI_Lcd_Config routines.
Example	`' Clear Lcd display:` `SPI_Lcd_Cmd(LCD_CLEAR)`

Available SPI Lcd Commands

Lcd Command	Purpose
LCD_FIRST_ROW	Move cursor to the 1st row
LCD_SECOND_ROW	Move cursor to the 2nd row
LCD_THIRD_ROW	Move cursor to the 3rd row
LCD_FOURTH_ROW	Move cursor to the 4th row
LCD_CLEAR	Clear display
LCD_RETURN_HOME	Return cursor to home position, returns a shifted display to its original position. Display data RAM is unaffected.
LCD_CURSOR_OFF	Turn off cursor
LCD_UNDERLINE_ON	Underline cursor on
LCD_BLINK_CURSOR_ON	Blink cursor on
LCD_MOVE_CURSOR_LEFT	Move cursor left without changing display data RAM
LCD_MOVE_CURSOR_RIGHT	Move cursor right without changing display data RAM
LCD_TURN_ON	Turn Lcd display on
LCD_TURN_OFF	Turn Lcd display off
LCD_SHIFT_LEFT	Shift display left without changing display data RAM
LCD_SHIFT_RIGHT	Shift display right without changing display data RAM

Library Example

This example demonstrates how to communicate Lcd via the SPI module, using serial to parallel convertor MCP23S17.

```
program Spi_Lcd

dim text as char[ 17]

' Port Expander module connections
dim SPExpanderRST as sbit at PORTB.B0
    SPExpanderCS  as sbit at PORTB.B1
    SPExpanderRST_Direction as sbit at DDRB.B0
    SPExpanderCS_Direction  as sbit at DDRB.B1
' End Port Expander module connections

main:
  text = "mikroElektronika"
  ' If Port Expander Library uses SPI1 module
  SPI1_Init()                                  ' Initialize SPI module
used with PortExpander
  Spi_Rd_Ptr = @SPI1_Read                 ' Pass pointer to SPI Read
sub function of used SPI module

  ' If Port Expander Library uses SPI2 module
  ' SPI2_Init()                                ' Initialize SPI module
used with PortExpander
  ' Spi_Rd_Ptr = &SPI2_Read               ' Pass pointer to SPI Read
sub function of used SPI module
  SPI_Lcd_Config(0)                          ' Initialize Lcd over SPI
interface
  SPI_Lcd_Cmd(LCD_CLEAR)                    ' Clear display
  SPI_Lcd_Cmd(LCD_CURSOR_OFF)              ' Turn cursor off
  SPI_Lcd_Out(1,6, "mikroE")                 ' Print text to Lcd, 1st
row, 6th column
  SPI_Lcd_Chr_CP("!")                       ' Append "!"
  SPI_Lcd_Out(2,1, text)                     ' Print text to Lcd, 2nd
row, 1st column
end.
```

HW Connection

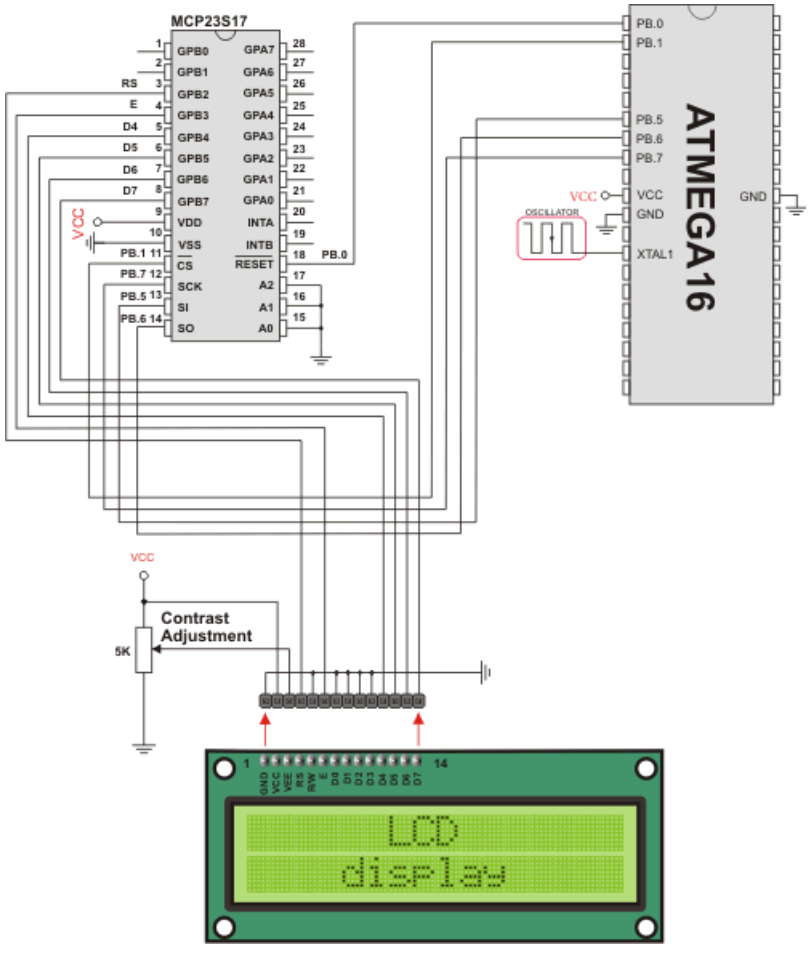

SPI Lcd HW connection

SPI LCD8 (8-BIT INTERFACE) LIBRARY

The mikroBasic PRO for AVR provides a library for communication with Lcd (with HD44780 compliant controllers) in 8-bit mode via SPI interface.

For creating a custom set of Lcd characters use Lcd Custom Character Tool.

Note: Library uses the SPI module for communication. The user must initialize the SPI module before using the SPI Lcd Library.

Note: This Library is designed to work with mikroElektronika's Serial Lcd/Glcd Adapter Board pinout, see schematic at the bottom of this page for details.

External dependencies of SPI Lcd Library

The implementation of SPI Lcd Library routines is based on Port Expander Library routines.

Prior to calling any of this library routines, Spi_Rd_Ptr needs to be initialized with the appropriate SPI_Read routine.

External dependencies are the same as Port Expander Library external dependencies.

Library Routines

- SPI_Lcd8_Config
- SPI_Lcd8_Out
- SPI_Lcd8_Out_Cp
- SPI_Lcd8_Chr
- SPI_Lcd8_Chr_Cp
- SPI_Lcd8_Cmd

SPI_Lcd8_Config

Prototype	`sub procedure SPI_Lcd8_Config(dim DeviceAddress as byte)`
Returns	Nothing.
Description	Initializes the Lcd module via SPI interface. Parameters : - `DeviceAddress:` spi expander hardware address, see schematic at the bottom of this page
Requires	Global variables : - `SPExpanderCS:` Chip Select line - `SPExpanderRST:` Reset line - `SPExpanderCS_Direction:` Direction of the Chip Select pin - `SPExpanderRST_Direction:` Direction of the Reset pin must be defined before using this function. SPI module needs to be initialized. See SPI1_Init and SPI1_Init_Advanced routines.

Example	`' port expander pinout definition`
	`dim SPExpanderCS as sbit at PORTB.B1`
	`SPExpanderRST as sbit at PORTB.B0`
	`SPExpanderCS_Direction as sbit at DDRB.B1`
	`SPExpanderRST_Direction as sbit at DDRB.B0`
	`...`
	`Spi1_Init()  ' Initialize spi interface`
	`Spi_Rd_Ptr = @SPI1_Read  ' Pass pointer to SPI Read function of used SPI module`
	`SPI_Lcd8_Config(0)  ' Intialize lcd in 8bit mode via spi`

SPI_Lcd8_Out

Prototype	`sub procedure SPI_Lcd8_Out(dim row as byte, dim column as byte, dim byref text as string[19])`
Returns	Nothing.
Description	Prints text on Lcd starting from specified position. Both string variables and literals can be passed as a text. Parameters : - `row:` starting position row number - `column:` starting position column number - `text:` text to be written
Requires	Lcd needs to be initialized for SPI communication, see SPI_Lcd8_Config routines.
Example	`' Write text "Hello!" on Lcd starting from row 1, column 3:` `SPI_Lcd8_Out(1, 3, "Hello!")`

SPI_Lcd8_Out_Cp

Prototype	`sub procedure SPI_Lcd8_Out_CP(dim text as string[19])`
Returns	Nothing.
Description	Prints text on Lcd at current cursor position. Both string variables and literals can be passed as a text. Parameters : - `text:` text to be written
Requires	Lcd needs to be initialized for SPI communication, see SPI_Lcd8_Config routines.
Example	`' Write text "Here!" at current cursor position:` `SPI_Lcd8_Out_CP("Here!")`

SPI_Lcd8_Chr

Prototype	`sub procedure SPI_Lcd8_Chr(dim Row as byte, dim Column as byte, dim Out_Char as byte)`
Returns	Nothing.
Description	Prints character on Lcd at specified position. Both variables and literals can be passed as character. Parameters : - `row:` writing position row number - `column:` writing position column number - `out_char:` character to be written
Requires	Lcd needs to be initialized for SPI communication, see SPI_Lcd8_Config routines.
Example	`' Write character "i" at row 2, column 3:` `SPI_Lcd8_Chr(2, 3, 'i')`

SPI_Lcd8_Chr_Cp

Prototype	`sub procedure SPI_Lcd8_Chr_CP(dim Out_Char as byte)`
Returns	Nothing.
Description	Prints character on Lcd at current cursor position. Both variables and literals can be passed as character. Parameters : - `out_char:` character to be written
Requires	Lcd needs to be initialized for SPI communication, see SPI_Lcd8_Config routines.

Example	Print “e” at current cursor position:
	
	`' Write character "e" at current cursor position:`
	`SPI_Lcd8_Chr_Cp('e')`

SPI_Lcd8_Cmd

Prototype	`sub procedure SPI_Lcd8_Cmd(dim out_char as byte)`
Returns	Nothing.
Description	Sends command to Lcd. Parameters : - `out_char:` command to be sent **Note:** Predefined constants can be passed to the function, see Available SPI Lcd8 Commands.
Requires	Lcd needs to be initialized for SPI communication, see SPI_Lcd8_Config routines.
Example	`' Clear Lcd display:` `SPI_Lcd8_Cmd(LCD_CLEAR)`

Available SPI Lcd8 Commands

Lcd Command	Purpose
LCD_FIRST_ROW	Move cursor to the 1st row
LCD_SECOND_ROW	Move cursor to the 2nd row
LCD_THIRD_ROW	Move cursor to the 3rd row
LCD_FOURTH_ROW	Move cursor to the 4th row
LCD_CLEAR	Clear display
LCD_RETURN_HOME	Return cursor to home position, returns a shifted display to its original position. Display data RAM is unaffected.
LCD_CURSOR_OFF	Turn off cursor
LCD_UNDERLINE_ON	Underline cursor on
LCD_BLINK_CURSOR_ON	Blink cursor on
LCD_MOVE_CURSOR_LEFT	Move cursor left without changing display data RAM
LCD_MOVE_CURSOR_RIGHT	Move cursor right without changing display data RAM
LCD_TURN_ON	Turn Lcd display on
LCD_TURN_OFF	Turn Lcd display off
LCD_SHIFT_LEFT	Shift display left without changing display data RAM
LCD_SHIFT_RIGHT	Shift display right without changing display data RAM

Library Example

This example demonstrates how to communicate Lcd in 8-bit mode via the SPI module, using serial to parallel convertor MCP23S17.

```
program Spi_Lcd8_Test

dim text as char[ 16]

' Port Expander module connections
dim SPExpanderRST as sbit at PORTB.0
    SPExpanderCS  as sbit at PORTB.1
    SPExpanderRST_Direction as sbit at DDRB.0
    SPExpanderCS_Direction  as sbit at DDRB.1
' End Port Expander module connections


main:
  text = "mikroE"
  ' If Port Expander Library uses SPI1 module
  SPI1_Init()                                  ' Initialize SPI mod-
ule used with PortExpander
  Spi_Rd_Ptr = @SPI1_Read                      ' Pass pointer to SPI
Read sub function of used SPI module

  ' ' If Port Expander Library uses SPI2 module
  ' SPI2_Init()                                ' Initialize SPI mod-
ule used with PortExpander
  ' Spi_Rd_Ptr = &SPI2_Read                    ' Pass pointer to SPI
Read sub function of used SPI module

  SPI_Lcd8_Config(0)                             ' Intialize Lcd in
8bit mode via SPI
  SPI_Lcd8_Cmd(LCD_CLEAR)                      ' Clear display
  SPI_Lcd8_Cmd(LCD_CURSOR_OFF)                 ' Turn cursor off
  SPI_Lcd8_Out(1,6, text)                       ' Print text to Lcd,
1st row, 6th column...
  SPI_Lcd8_Chr_CP("!")                         ' Append "!"
   SPI_Lcd8_Out(2,1, "mikroelektronika")       ' Print text to Lcd,
2nd row, 1st column...
  SPI_Lcd8_Out(3,1, text)                      ' For Lcd modules with
more than two rows
  SPI_Lcd8_Out(4,15, text)                     ' For Lcd modules with
more than two rows
end.
```

HW Connection

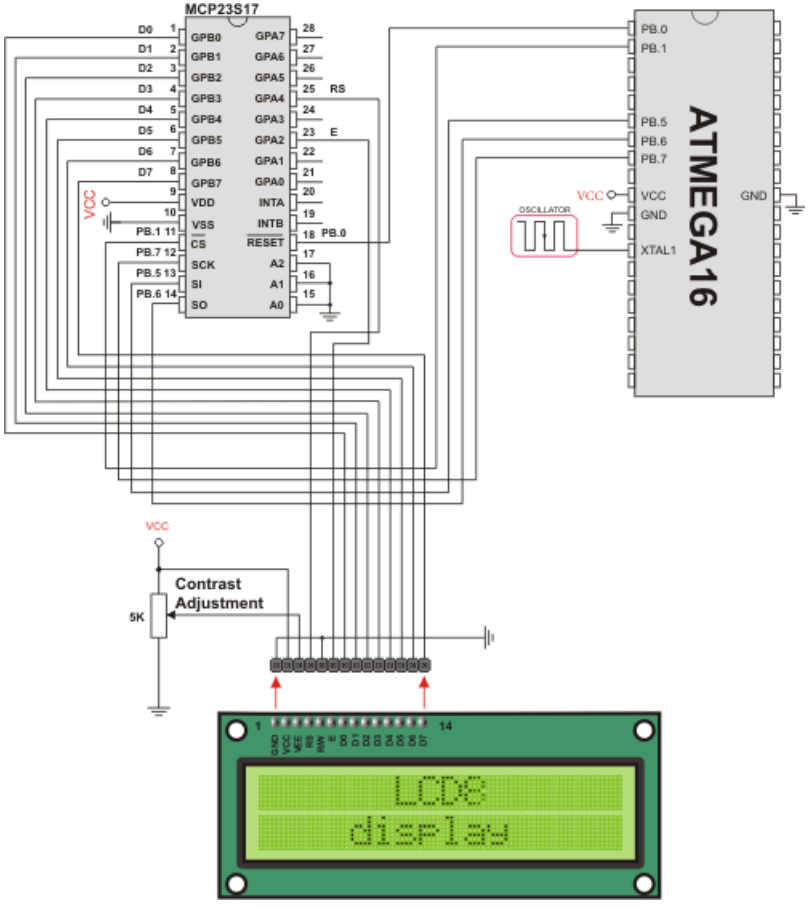

SPI Lcd8 HW connection

SPI T6963C GRAPHIC LCD LIBRARY

The mikroBasic PRO for AVR provides a library for working with Glcds based on TOSHIBA T6963C controller via SPI interface. The Toshiba T6963C is a very popular Lcd controller for the use in small graphics modules. It is capable of controlling displays with a resolution up to 240x128. Because of its low power and small outline it is most suitable for mobile applications such as PDAs, MP3 players or mobile measurement equipment. Although this controller is small, it has a capability of displaying and merging text and graphics and it manages all interfacing signals to the displays Row and Column drivers.

For creating a custom set of Glcd images use Glcd Bitmap Editor Tool.

Note: The library uses the SPI module for communication. The user must initialize SPI module before using the SPI T6963C Glcd Library.

Note: This Library is designed to work with mikroElektronika's Serial Glcd 240x128 and 240x64 Adapter Boards pinout, see schematic at the bottom of this page for details.

Note: Some mikroElektronika's adapter boards have pinout different from T6369C datasheets. Appropriate relations between these labels are given in the table below:

Adapter Board	T6369C datasheet
RS	C/D
R/W	/RD
E	/WR

External dependencies of SPI T6963C Graphic Lcd Library

The implementation of SPI T6963C Graphic Lcd Library routines is based on Port Expander Library routines.

Prior to calling any of this library routines, Spi_Rd_Ptr needs to be initialized with the appropriate SPI_Read routine.

External dependencies are the same as Port Expander Library external dependencies.

Library Routines

- SPI_T6963C_Config
- SPI_T6963C_WriteData
- SPI_T6963C_WriteCommand
- SPI_T6963C_SetPtr
- SPI_T6963C_WaitReady
- SPI_T6963C_Fill
- SPI_T6963C_Dot
- SPI_T6963C_Write_Char
- SPI_T6963C_Write_Text
- SPI_T6963C_Line
- SPI_T6963C_Rectangle
- SPI_T6963C_Box
- SPI_T6963C_Circle
- SPI_T6963C_Image
- SPI_T6963C_Sprite
- SPI_T6963C_Set_Cursor
- SPI_T6963C_ClearBit
- SPI_T6963C_SetBit
- SPI_T6963C_NegBit
- SPI_T6963C_DisplayGrPanel
- SPI_T6963C_DisplayTxtPanel
- SPI_T6963C_SetGrPanel
- SPI_T6963C_SetTxtPanel
- SPI_T6963C_PanelFill
- SPI_T6963C_GrFill
- SPI_T6963C_TxtFill
- SPI_T6963C_Cursor_Height
- SPI_T6963C_Graphics
- SPI_T6963C_Text
- SPI_T6963C_Cursor
- SPI_T6963C_Cursor_Blink

SPI_T6963C_Config

Prototype	`sub procedure SPI_T6963C_Config(dim width as word, dim height as word, dim fntW as word, dim DeviceAddress as byte, dim wr as byte, dim rd as byte, dim cd as byte, dim rst as byte)`
Returns	Nothing.
Description	Initalizes the Graphic Lcd controller. Parameters : - `width:` width of the Glcd panel - `height:` height of the Glcd panel - `fntW:` font width - `DeviceAddress:` SPI expander hardware address, see schematic at the bottom of this page - `wr:` write signal pin on Glcd control port - `rd:` read signal pin on Glcd control port - `cd:` command/data signal pin on Glcd control port - `rst:` reset signal pin on Glcd control port Display RAM organization: The library cuts RAM into panels : a complete panel is one graphics panel followed by a text panel (see schematic below). schematic: +----------------------+ /\ + GRAPHICS PANEL #0 + | + + | + + | + + | +----------------------+ | PANEL 0 + TEXT PANEL #0 + | + + \/ +----------------------+ /\ + GRAPHICS PANEL #1 + | + + | + + | + + | +----------------------+ | PANEL 1 + TEXT PANEL #2 + | + + | +----------------------+ \/

Requires	Global variables : - SPExpanderCS: Chip Select line - SPExpanderRST: Reset line - SPExpanderCS_Direction: Direction of the Chip Select pin - SPExpanderRST_Direction: Direction of the Reset pin must be defined before using this function. SPI module needs to be initialized. See SPI1_Init and SPI1_Init_Advanced routines.

Example	`// port expander pinout definition`
	`dim SPExpanderCS as sbit at PORTB.B1`
	`SPExpanderRST as sbit at PORTB.B0`
	`SPExpanderCS_Direction as sbit at DDRB.B1`
	`SPExpanderRST_Direction as sbit at DDRB.B0`
	`...`
	`' Initialize SPI module`
	`SPI1_Init_Advanced(_SPI_MASTER, _SPI_FCY_DIV32, _SPI_CLK_HI_TRAILING)`
	`SPI_Rd_Ptr = @SPI1_Read ' Pass pointer to SPI Read function of used SPI module`
	`SPI_T6963C_Config(240, 64, 8, 0, 0, 1, 3, 4)`

SPI_T6963C_WriteData

Prototype	`sub procedure SPI_T6963C_WriteData(dim Ddata as byte)`
Returns	Nothing.
Description	Writes data to T6963C controller via SPI interface. Parameters : - Ddata: data to be written
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`SPI_T6963C_WriteData(AddrL)`

SPI_T6963C_WriteCommand

Prototype	`sub procedure SPI_T6963C_WriteCommand(dim Ddata as byte)`
Returns	Nothing.
Description	Writes command to T6963C controller via SPI interface. Parameters : - `Ddata:` command to be written
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`SPI_T6963C_WriteCommand(SPI_T6963C_CURSOR_POINTER_SET)`

SPI_T6963C_SetPtr

Prototype	`sub procedure SPI_T6963C_SetPtr(dim p as word, dim c as byte)`
Returns	Nothing.
Description	Sets the memory pointer p for command c. Parameters : - `p:` address where command should be written - `c:` command to be written
Requires	SToshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`SPI_T6963C_SetPtr(T6963C_grHomeAddr + start, T6963C_ADDRESS_POINTER_SET)`

SPI_T6963C_WaitReady

Prototype	`sub procedure SPI_T6963C_WaitReady()`
Returns	Nothing.
Description	Pools the status byte, and loops until Toshiba Glcd module is ready.
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`SPI_T6963C_WaitReady()`

SPI_T6963C_Fill

Prototype	`sub procedure SPI_T6963C_Fill(dim v as byte, dim start as word, dim len as word)`
Returns	Nothing.
Description	Fills controller memory block with given byte. Parameters : - `v:` byte to be written - `start:` starting address of the memory block - `len:` length of the memory block in bytes
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`SPI_T6963C_Fill(0x33, 0x00FF, 0x000F)`

SPI_T6963C_Dot

Prototype	`sub procedure SPI_T6963C_Dot(dim x as integer, dim y as integer, dim color as byte)`
Returns	Nothing.
Description	Draws a dot in the current graphic panel of Glcd at coordinates (x, y). Parameters : - `x:` dot position on x-axis - `y:` dot position on y-axis - `color:` color parameter. Valid values: SPI_T6963C_BLACK and SPI_T6963C_WHITE
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`SPI_T6963C_Dot(x0, y0, pcolor)`

SPI_T6963C_Write_Char

Prototype	`sub procedure SPI_T6963C_Write_Char(dim c as byte, dim x as byte, dim y as byte, dim mode as byte)`
Returns	Nothing.
Description	Writes a char in the current text panel of Glcd at coordinates (x, y). Parameters : - `c:` char to be written - `x:` char position on x-axis - `y:` char position on y-axis - `mode:` mode parameter. Valid values: SPI_T6963C_ROM_MODE_OR, SPI_T6963C_ROM_MODE_XOR, SPI_T6963C_ROM_MODE_AND and SPI_T6963C_ROM_MODE_TEXT Mode parameter explanation: - OR Mode: In the OR-Mode, text and graphics can be displayed and the data is logically “OR-ed”. This is the most common way of combining text and graphics for example labels on buttons. - XOR-Mode: In this mode, the text and graphics data are combined via the logical “exclusive OR”. This can be useful to display text in negative mode, i.e. white text on black background. - AND-Mode: The text and graphic data shown on display are combined via the logical “AND function”. - TEXT-Mode: This option is only available when displaying just a text. The Text Attribute values are stored in the graphic area of display memory. For more details see the T6963C datasheet.
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`SPI_T6963C_Write_Char("A",22,23,AND)`

SPI_T6963C_Write_Text

Prototype	`sub procedure SPI_T6963C_Write_Text(dim byref str as byte[ 10], dim x as byte, dim y as byte, dim mode as byte)`
Returns	Nothing.
Description	Writes text in the current text panel of Glcd at coordinates (x, y). Parameters : - `str:` text to be written - `x:` text position on x-axis - `y:` text position on y-axis - `mode:` mode parameter. Valid values: SPI_T6963C_ROM_MODE_OR, SPI_T6963C_ROM_MODE_XOR, SPI_T6963C_ROM_MODE_AND and SPI_T6963C_ROM_MODE_TEXT Mode parameter explanation: - OR Mode: In the OR-Mode, text and graphics can be displayed and the data is logically “OR-ed”. This is the most common way of combining text and graphics for example labels on buttons. - XOR-Mode: In this mode, the text and graphics data are combined via the logical “exclusive OR”. This can be useful to display text in negative mode, i.e. white text on black background. - AND-Mode: The text and graphic data shown on the display are combined via the logical “AND function”. - TEXT-Mode: This option is only available when displaying just a text. The Text Attribute values are stored in the graphic area of display memory. For more details see the T6963C datasheet.
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`SPI_T6963C_Write_Text("Glcd LIBRARY DEMO, WELCOME !", 0, 0, T6963C_ROM_MODE_EXOR)`

SPI_T6963C_Line

Prototype	`sub procedure SPI_T6963C_Line(dim x0 as integer, dim y0 as integer, dim x1 as integer, dim y1 as integer, dim pcolor as byte)`
Returns	Nothing.
Description	Draws a line from (x0, y0) to (x1, y1). Parameters : - `x0:` x coordinate of the line start - `y0:` y coordinate of the line end - `x1:` x coordinate of the line start - `y1:` y coordinate of the line end - `pcolor:` color parameter. Valid values: SPI_T6963C_BLACK and SPI_T6963C_WHITE
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`SPI_T6963C_Line(0, 0, 239, 127, T6963C_WHITE)`

SPI_T6963C_Rectangle

Prototype	`sub procedure SPI_T6963C_Rectangle(dim x0 as integer, dim y0 as integer, dim x1 as integer, dim y1 as integer, dim pcolor as byte)`
Returns	Nothing.
Description	Draws a rectangle on Glcd. Parameters : - `x0:` x coordinate of the upper left rectangle corner - `y0:` y coordinate of the upper left rectangle corner - `x1:` x coordinate of the lower right rectangle corner - `y1:` y coordinate of the lower right rectangle corner - `pcolor:` color parameter. Valid values: SPI_T6963C_BLACK and SPI_T6963C_WHITE
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`SPI_T6963C_Rectangle(20, 20, 219, 107, T6963C_WHITE)`

SPI_T6963C_Box

Prototype	`sub procedure SPI_T6963C_Box(dim x0 as integer, dim y0 as integer, dim x1 as integer, dim y1 as integer, dim pcolor as byte)`
Returns	Nothing.
Description	Draws a box on the Glcd Parameters : - `x0:` x coordinate of the upper left box corner - `y0:` y coordinate of the upper left box corner - `x1:` x coordinate of the lower right box corner - `y1:` y coordinate of the lower right box corner - `pcolor:` color parameter. Valid values: SPI_T6963C_BLACK and SPI_T6963C_WHITE
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`SPI_T6963C_Box(0, 119, 239, 127, T6963C_WHITE)`

SPI_T6963C_Circle

Prototype	`sub procedure SPI_T6963C_Circle(dim x as integer, dim y as integer, dim r as longint, dim pcolor as byte)`
Returns	Nothing.
Description	Draws a circle on the Glcd. Parameters : - `x`: x coordinate of the circle center - `y:` y coordinate of the circle center - `r:` radius size - `pcolor:` color parameter. Valid values: SPI_T6963C_BLACK and SPI_T6963C_WHITE
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`SPI_T6963C_Circle(120, 64, 110, T6963C_WHITE)`

SPI_T6963C_Image

Prototype	`sub procedure SPI_T6963C_image(const pic as ^byte)`
Returns	Nothing.
Description	Displays bitmap on Glcd. Parameters : - `pic:` image to be displayed. Bitmap array can be located in both code and RAM memory (due to the mikroBasic PRO for AVR pointer to const and pointer to RAM equivalency). Use the mikroBasic PRO's integrated Glcd Bitmap Editor (menu option **Tools › Glcd Bitmap Editor**) to convert image to a constant array suitable for displaying on Glcd.
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`SPI_T6963C_Image(my_image)`

SPI_T6963C_Sprite

Prototype	`sub procedure SPI_T6963C_sprite(dim px, py, sx, sy as byte, const pic as ^byte)`
Returns	Nothing.
Description	Fills graphic rectangle area (px, py) to (px+sx, py+sy) with custom size picture. Parameters : - `px:` x coordinate of the upper left picture corner. Valid values: multiples of the font width - `py:` y coordinate of the upper left picture corner - `pic:` picture to be displayed - `sx:` picture width. Valid values: multiples of the font width - `sy:` picture height **Note:** If `px` and `sx` parameters are not multiples of the font width they will be scaled to the nearest lower number that is a multiple of the font width.
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`SPI_T6963C_Sprite(76, 4, einstein, 88, 119) ' draw a sprite`

SPI_T6963C_Set_Cursor

Prototype	`sub procedure SPI_T6963C_set_cursor(dim x, y as byte)`
Returns	Nothing.
Description	Sets cursor to row x and column y. Parameters : - `x:` cursor position row number - `y:` cursor position column number
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`SPI_T6963C_Set_Cursor(cposx, cposy)`

SPI_T6963C_ClearBit

Prototype	`sub procedure SPI_T6963C_clearBit(dim b as byte)`
Returns	Nothing.
Description	Clears control port bit(s). Parameters : - `b:` bit mask. The function will clear bit `x` on control port if bit `x` in bit mask is set to 1.
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`' clear bits 0 and 1 on control port` `SPI_T6963C_ClearBit(0x03)`

SPI_T6963C_SetBit

Prototype	`sub procedure SPI_T6963C_setBit(dim b as byte)`
Returns	Nothing.
Description	Sets control port bit(s). Parameters : - `b:` bit mask. The function will set bit `x` on control port if bit `x` in bit mask is set to 1.
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`' set bits 0 and 1 on control port` `SPI_T6963C_SetBit(0x03)`

SPI_T6963C_NegBit

Prototype	`sub procedure SPI_T6963C_negBit(dim b as byte)`
Returns	Nothing.
Description	Negates control port bit(s). Parameters : - `b`: bit mask. The function will negate bit `x` on control port if bit `x` in bit mask is set to 1.
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`' negate bits 0 and 1 on control port` `SPI_T6963C_NegBit(0x03)`

SPI_T6963C_DisplayGrPanel

Prototype	`sub procedure SPI_T6963C_DisplayGrPanel(dim n as byte)`
Returns	Nothing.
Description	Display selected graphic panel. Parameters : - `n`: graphic panel number. Valid values: `0` and `1`.
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`' display graphic panel 1` `SPI_T6963C_DisplayGrPanel(1)`

SPI_T6963C_DisplayTxtPanel

Prototype	`sub procedure SPI_T6963C_DisplayTxtPanel(dim n as byte)`
Returns	Nothing.
Description	Display selected text panel. Parameters : - `n`: text panel number. Valid values: `0` and `1`.
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`' display text panel 1` `SPI_T6963C_DisplayTxtPanel(1)`

SPI_T6963C_SetGrPanel

Prototype	`sub procedure SPI_T6963C_SetGrPanel(dim n as byte)`
Returns	Nothing.
Description	Compute start address for selected graphic panel and set appropriate internal pointers. All subsequent graphic operations will be preformed at this graphic panel. Parameters : - `n:` graphic panel number. Valid values: 0 and 1.
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`' set graphic panel 1 as current graphic panel.` `SPI_T6963C_SetGrPanel(1)`

SPI_T6963C_SetTxtPanel

Prototype	`sub procedure SPI_T6963C_SetTxtPanel(dim n as byte)`
Returns	Nothing.
Description	Compute start address for selected text panel and set appropriate internal pointers. All subsequent text operations will be preformed at this text panel. Parameters : - `n:` text panel number. Valid values: `0` and `1`.
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`' set text panel 1 as current text panel.` `SPI_T6963C_SetTxtPanel(1)`

SPI_T6963C_PanelFill

Prototype	`sub procedure SPI_T6963C_PanelFill(dim v as byte)`
Returns	Nothing.
Description	Fill current panel in full (graphic+text) with appropriate value (0 to clear). Parameters : - `v:` value to fill panel with.
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`clear current panel` `SPI_T6963C_PanelFill(0)`

SPI_T6963C_GrFill

Prototype	`sub procedure SPI_T6963C_GrFill(dim v as byte)`
Returns	Nothing.
Description	Fill current graphic panel with appropriate value (0 to clear). Parameters : - `v:` value to fill graphic panel with.
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`' clear current graphic panel` `SPI_T6963C_GrFill(0)`

SPI_T6963C_TxtFill

Prototype	`sub procedure SPI_T6963C_TxtFill(dim v as byte)`
Returns	Nothing.
Description	Fill current text panel with appropriate value (0 to clear). Parameters : - `v:` this value increased by 32 will be used to fill text panel.
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`' clear current text panel` `SPI_T6963C_TxtFill(0)`

SPI_T6963C_Cursor_Height

Prototype	`sub procedure SPI_T6963C_Cursor_Height(dim n as byte)`
Returns	Nothing.
Description	Set cursor size. Parameters : - `n:` cursor height. Valid values: 0..7.
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`SPI_T6963C_Cursor_Height(7)`

SPI_T6963C_Graphics

Prototype	`sub procedure SPI_T6963C_Graphics(dim n as byte)`
Returns	Nothing.
Description	Enable/disable graphic displaying. Parameters : - `n:` graphic enable/disable parameter. Valid values: 0 (disable graphic dispaying) and 1 (enable graphic displaying).
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`' enable graphic displaying` `SPI_T6963C_Graphics(1)`

SPI_T6963C_Text

Prototype	`sub procedure SPI_T6963C_Text(dim n as byte)`
Returns	Nothing.
Description	Enable/disable text displaying. Parameters : - `n:` text enable/disable parameter. Valid values: 0 (disable text dispaying) and 1 (enable text displaying).
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`' enable text displaying` `SPI_T6963C_Text(1)`

SPI_T6963C_Cursor

Prototype	`sub procedure SPI_T6963C_Cursor(dim n as byte)`
Returns	Nothing.3q
Description	Set cursor on/off. Parameters : - `n:` on/off parameter. Valid values: 0 (set cursor off) and 1 (set cursor on).
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`' set cursor on` `SPI_T6963C_Cursor(1)`

SPI_T6963C_Cursor_Blink

Prototype	`sub procedure SPI_T6963C_Cursor_Blink(dim n as byte)`
Returns	Nothing.
Description	Enable/disable cursor blinking. Parameters : - `n:` cursor blinking enable/disable parameter. Valid values: 0 (disable cursor blinking) and 1 (enable cursor blinking).
Requires	Toshiba Glcd module needs to be initialized. See SPI_T6963C_Config routine.
Example	`' enable cursor blinking` `SPI_T6963C_Cursor_Blink(1)`

Library Example

The following drawing demo tests advanced routines of the SPI T6963C Glcd library. Hardware configurations in this example are made for the T6963C 240x128 display, EasyAVR5A board and ATmega16.

```
program SPI_T6963C_240x128

include __Lib_SPIT6963C_Const
include bitmap
include bitmap2

dim
' Port Expander module connections
   SPExpanderRST as sbit at PORTB.B0
   SPExpanderCS  as sbit at PORTB.B1
   SPExpanderRST_Direction as sbit at DDRB.B0
   SPExpanderCS_Direction  as sbit at DDRB.B1
' End Port Expander module connections

dim   panel as byte            ' current panel
           i as word           ' general purpose register
        curs as byte           ' cursor visibility
       cposx,
       cposy as word           ' cursor x-y position
       txt, txt1 as string[ 29]



  txt1 = " EINSTEIN WOULD HAVE LIKED mE"
  txt  = " GLCD LIBRARY DEMO, WELCOME !"

  DDRA = 0x00                        ' configure PORTA as input

'  *
'  * init display for 240 pixel width and 128 pixel height
'  * 8 bits character width
'  * data bus on MCP23S17 portB
'  * control bus on MCP23S17 portA
'  * bit 2 is !WR
'  * bit 1 is !RD
'  * bit 0 is !CD
'  * bit 4 is RST
'  * chip enable, reverse on, 8x8 font internaly set in library
'  *

 ' Pass pointer to SPI Read function of used SPI module
  Spi_Rd_Ptr = @SPI1_Read

  ' Initialize SPI module
   SPI1_Init_Advanced(_SPI_MASTER, _SPI_FCY_DIV2, _SPI_CLK_HI_TRAIL-
ING)
```

```
' ' If Port Expander Library uses SPI2 module
  ' Pass pointer to SPI Read function of used SPI module
  ' Spi_Rd_Ptr = @SPI2_Read              ' Pass pointer to SPI Read
function of used SPI module

  ' Initialize SPI module used with PortExpander
        '     SPI2_Init_Advanced(_SPI_MASTER,     _SPI_FCY_DIV2,
_SPI_CLK_HI_TRAILING)


  ' Initialize SPI Toshiba 240x128
  SPI_T6963C_Config(240, 128, 8, 0, 2, 1, 0, 4)
  'Delay_ms(1000)

  ' *
  ' * Enable both graphics and text display at the same time
  ' *

  SPI_T6963C_graphics(1)

  SPI_T6963C_text(1)

  panel = 0
  i = 0
  curs = 0
  cposx = 0
  cposy = 0

  ' *
  ' * Text messages
  ' *

  SPI_T6963C_write_text(txt, 0, 0, SPI_T6963C_ROM_MODE_XOR)
  SPI_T6963C_write_text(txt1, 0, 15, SPI_T6963C_ROM_MODE_XOR)

  '*
  '* Cursor
  '*

  SPI_T6963C_cursor_height(8)          ' 8 pixel height
  SPI_T6963C_set_cursor(0, 0)          ' move cursor to top left
  SPI_T6963C_cursor(0)                  ' cursor off

  '*
  '* Draw rectangles
  '*
  SPI_T6963C_rectangle(0, 0, 239, 127, SPI_T6963C_WHITE)
  SPI_T6963C_rectangle(20, 20, 219, 107, SPI_T6963C_WHITE)
  SPI_T6963C_rectangle(40, 40, 199, 87, SPI_T6963C_WHITE)
  SPI_T6963C_rectangle(60, 60, 179, 67, SPI_T6963C_WHITE)
```

```
'*
  '* Draw a cross
  '*
  SPI_T6963C_line(0, 0, 239, 127, SPI_T6963C_WHITE)
  SPI_T6963C_line(0, 127, 239, 0, SPI_T6963C_WHITE)

  '*
  '* Draw solid boxes
  '*
  SPI_T6963C_box(0, 0, 239, 8, SPI_T6963C_WHITE)
  SPI_T6963C_box(0, 119, 239, 127, SPI_T6963C_WHITE)

  '*
  '* Draw circles
  '*
  SPI_T6963C_circle(120, 64, 10,  SPI_T6963C_WHITE)
  SPI_T6963C_circle(120, 64, 30,  SPI_T6963C_WHITE)
  SPI_T6963C_circle(120, 64, 50,  SPI_T6963C_WHITE)
  SPI_T6963C_circle(120, 64, 70,  SPI_T6963C_WHITE)
  SPI_T6963C_circle(120, 64, 90,  SPI_T6963C_WHITE)
  SPI_T6963C_circle(120, 64, 110, SPI_T6963C_WHITE)
  SPI_T6963C_circle(120, 64, 130, SPI_T6963C_WHITE)

  SPI_T6963C_sprite(76, 4, @einstein, 88, 119)    ' Draw a sprite
  SPI_T6963C_setGrPanel(1)                         ' Select other
graphic panel
  SPI_T6963C_image(@mikroe)                          ' Fill the
graphic screen with a picture

  while TRUE                                       ' Endless loop

    '*
     '* If PORTA_0 is pressed, toggle the display between graphic
panel 0 and graphic 1
    '*
    if( PINA0_bit = 0) then
        Inc(panel)
        panel = panel and 1
                    SPI_T6963C_setPtr((SPI_T6963C_grMemSize   +
SPI_T6963C_txtMemSize) * panel, SPI_T6963C_GRAPHIC_HOME_ADDRESS_SET)
        Delay_ms(300)

     '*
     '* If PORTA_1 is pressed, display only graphic panel
     '*
     else
       if ( PINA1_bit = 0) then
           SPI_T6963C_graphics(1)
           SPI_T6963C_text(0)
           Delay_ms(300)
```

```
            '*
            '* If PORTA_3 is pressed, display text and graphic panels
            '*
                else
                  if ( PINA3_bit = 0) then
                       SPI_T6963C_graphics(1)
                       SPI_T6963C_text(1)
                       Delay_ms(300)

            '*
            '* If PORTA_4 is pressed, change cursor
            '*
                  else
                    if( PINA4_bit = 0) then
                         Inc(curs)
                         if (curs = 3) then
                           curs = 0
                         end if
                         select case curs
                           case 0
                               ' no cursor
                              SPI_T6963C_cursor(0)

                           case 1
                                ' blinking cursor
                                SPI_T6963C_cursor(1)
                                SPI_T6963C_cursor_blink(1)
                           case 2
                                ' non blinking cursor
                                SPI_T6963C_cursor(1)
                                SPI_T6963C_cursor_blink(0)
                         end select
                         Delay_ms(300)
                    end if
                  end if
                end if
              end if
          end if

            '*
            '* Move cursor, even if not visible
            '*
            Inc(cposx)
            if (cposx = SPI_T6963C_txtCols) then
              cposx = 0
              Inc(cposy)
             if (cposy = SPI_T6963C_grHeight / SPI_T6963C_CHARACTER_HEIGHT)
then
                cposy = 0
              end if
            end if
            SPI_T6963C_set_cursor(cposx, cposy)

            Delay_ms(100)
      wend
    end.
```

HW Connection

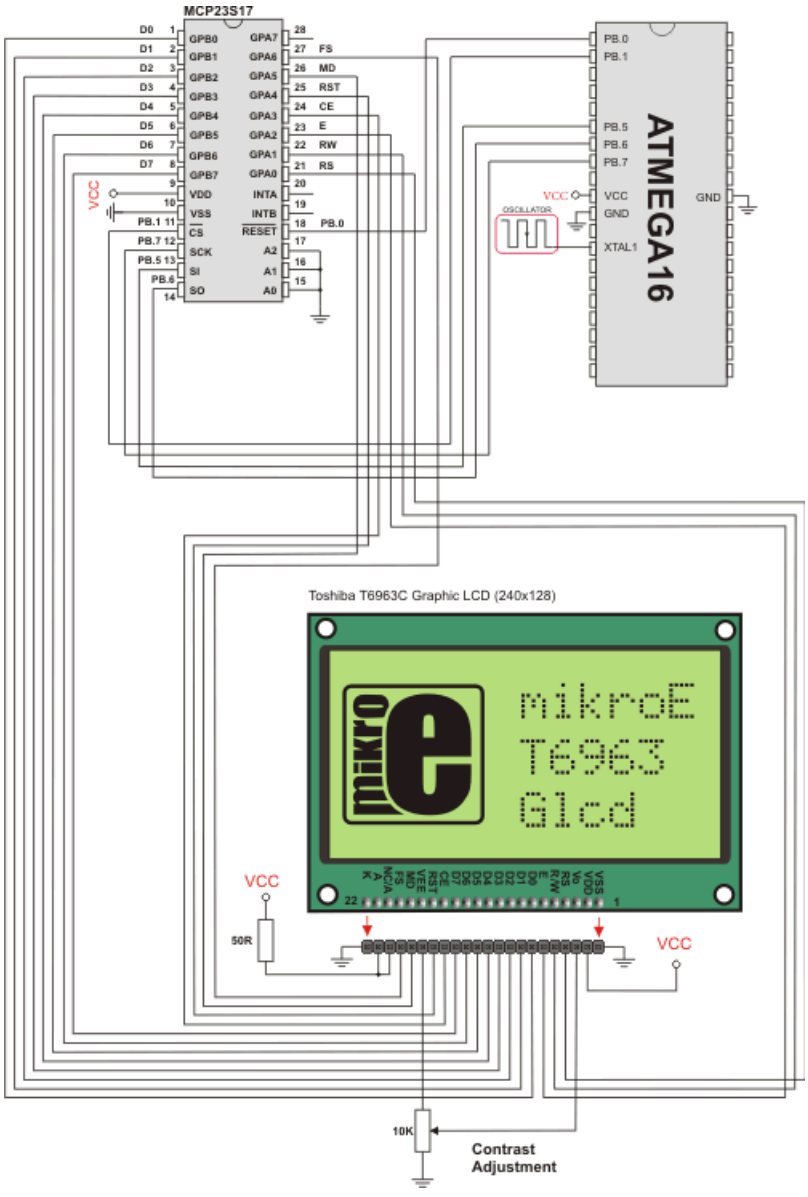

SPI T6963C Glcd HW connection

SPI T6963C GRAPHIC LCD LIBRARY

The mikroBasic PRO for AVR provides a library for working with Glcds based on TOSHIBA T6963C controller. The Toshiba T6963C is a very popular Lcd controller for the use in small graphics modules. It is capable of controlling displays with a resolution up to 240x128. Because of its low power and small outline it is most suitable for mobile applications such as PDAs, MP3 players or mobile measurement equipment. Although small, this contoller has a capability of displaying and merging text and graphics and it manages all the interfacing signals to the displays Row and Column drivers.

For creating a custom set of Glcd images use Glcd Bitmap Editor Tool.

Note: ChipEnable(CE), FontSelect(FS) and Reverse(MD) have to be set to appropriate levels by the user outside of the T6963C_Init function. See the Library Example code at the bottom of this page.

Note: Some mikroElektronika's adapter boards have pinout different from T6369C datasheets. Appropriate relations between these labels are given in the table below:

Adapter Board	T6369C datasheet
RS	C/D
R/W	/RD
E	/WR

External dependencies of T6963C Graphic Lcd Library

The following variables must be defined in all projects using T6963C Graphic Lcd library:	Description:	Example :
`dim T6963C_dataPort as byte sfr external`	T6963C Data Port.	`dim T6963C_dataPort as byte at PORTD`
`dim T6963C_ctrlPort as byte sfr external`	T6963C Control Port.	`dim T6963C_ctrlPort as byte at PORTC`
`dim T6963C_ctrlwr as sbit sfr external`	Write signal.	`dim T6963C_ctrlwr as sbit at PORTC.B2`
`dim T6963C_ctrlrd as sbit sfr external`	Read signal.	`dim T6963C_ctrlrd as sbit at PORTC.B1`
`dim T6963C_ctrlcd as sbit sfr external`	Command/Data signal.	`dim T6963C_ctrlcd as sbit at PORTC.B0`
`dim T6963C_ctrlrst as sbit sfr external`	Reset signal.	`dim T6963C_ctrlrst as sbit at PORTC.B4`
`dim T6963C_dataPort_Direction as byte sfr external`	Direction of the T6963C Data Port.	`dim T6963C_dataPort_Direction as byte at DDRD`
`dim T6963C_ctrlPort_Direction as byte sfr external`	Direction of the T6963C Control Port.	`dim T6963C_ctrlPort_Direction as byte at DDRC`
`dim T6963C_ctrlwr_Direction as sbit sfr external`	Direction of the Write pin.	`dim T6963C_ctrlwr_Direction as sbit at DDRC.B2`
`dim T6963C_ctrlrd_Direction as sbit sfr external`	Direction of the Read pin.	`dim T6963C_ctrlrd_Direction as sbit at DDRC.B1`
`dim T6963C_ctrlcd_Direction as sbit sfr external`	Direction of the Command/Data pin.	`dim T6963C_ctrlcd_Direction as sbit at DDRC.B0`
`dim T6963C_ctrlrst_Direction as sbit sfr external`	Direction of the Reset pin.	`dim T6963C_ctrlrst_Direction as sbit at DDRC.B4`

Library Routines

- T6963C_Init
- T6963C_WriteData
- T6963C_WriteCommand
- T6963C_SetPtr
- T6963C_WaitReady
- T6963C_Fill
- T6963C_Dot
- T6963C_Write_Char
- T6963C_Write_Text
- T6963C_Line
- T6963C_Rectangle
- T6963C_Box
- T6963C_Circle
- T6963C_Image
- T6963C_Sprite
- T6963C_Set_Cursor
- T6963C_DisplayGrPanel
- T6963C_DisplayTxtPanel
- T6963C_SetGrPanel
- T6963C_SetTxtPanel
- T6963C_PanelFill
- T6963C_GrFill
- T6963C_TxtFill
- T6963C_Cursor_Height
- T6963C_Graphics
- T6963C_Text
- T6963C_Cursor
- T6963C_Cursor_Blink

T6963C_Init

Prototype	`sub procedure T6963C_init(dim width, height, fntW as byte)`
Returns	Nothing.

Description	Initalizes the Graphic Lcd controller.
	
	Parameters :
	
	- `width:` width of the Glcd panel
	- `height:` height of the Glcd panel
	- `fntW:` font width
	
	Display RAM organization:
	The library cuts the RAM into panels : a complete panel is one graphics panel followed by a text panel (see schematic below).
	
	`schematic:`
	`+----------------------+ /\`
	`+ GRAPHICS PANEL #0    +  |`
	`+                        +  |`
	`+                        +  |`
	`+                        +  |`
	`+----------------------+  | PANEL 0`
	`+ TEXT PANEL #0         +  |`
	`+                        + \/`
	`+----------------------+ /\`
	`+ GRAPHICS PANEL #1    +  |`
	`+                        +  |`
	`+                        +  |`
	`+                        +  |`
	`+----------------------+  | PANEL 1`
	`+ TEXT PANEL #2         +  |`
	`+                        +  |`
	`+----------------------+ \/`

Requires	Global variables : - `T6963C_dataPort:` Data Port - `T6963C_ctrlPort:` Control Port - `T6963C_ctrlwr:` Write signal pin - `T6963C_ctrlrd:` Read signal pin - `T6963C_ctrlcd:` Command/Data signal pin - `T6963C_ctrlrst:` Reset signal pin - `T6963C_dataPort_Direction:` Direction of Data Port - `T6963C_ctrlPort_Direction:` Direction of Control Port - `T6963C_ctrlwr_Direction:` Direction of Write signal pin - `T6963C_ctrlrd_Direction:` Direction of Read signal pin - `T6963C_ctrlcd_Direction:` Direction of Command/Data signal pin - `T6963C_ctrlrst_Direction:` Direction of Reset signal pin must be defined before using this function.

Example	```' T6963C module connections dim T6963C_ctrlPort as byte at PORTC dim T6963C_dataPort as byte at PORTD dim T6963C_ctrlPort_Direction as byte at DDRD dim T6963C_dataPort_Direction as byte at DDRC dim T6963C_ctrlwr as sbit at PORTC.B2 dim T6963C_ctrlrd as sbit at PORTC.B1 dim T6963C_ctrlcd as sbit at PORTC.B0 dim T6963C_ctrlrst as sbit at PORTC.B4 dim T6963C_ctrlwr_Direction as sbit at DDRC.B2 dim T6963C_ctrlrd_Direction as sbit at DDRC.B1 dim T6963C_ctrlcd_Direction as sbit at DDRC.B0 dim T6963C_ctrlrst_Direction as sbit at DDRC.B4 ' End of T6963C module connections ... ' init display for 240 pixel width, 128 pixel height and 8 bits character width T6963C_init(240, 128, 8)```

T6963C_WriteData

Prototype	`sub procedure T6963C_WriteData(dim mydata as byte)`
Returns	Nothing.
Description	Writes data to T6963C controller. Parameters : - `mydata:` data to be written
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`T6963C_WriteData(AddrL)`

T6963C_WriteCommand

Prototype	`sub procedure T6963C_WriteCommand(dim mydata as byte)`
Returns	Nothing.
Description	Writes command to T6963C controller. Parameters : - `mydata:` command to be written
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`T6963C_WriteCommand(T6963C_CURSOR_POINTER_SET)`

T6963C_SetPtr

Prototype	`sub procedure T6963C_SetPtr(dim p as word, dim c as byte)`
Returns	Nothing.
Description	Sets the memory pointer p for command c. Parameters : - `p:` address where command should be written - `c:` command to be written
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`T6963C_SetPtr(T6963C_grHomeAddr + start, T6963C_ADDRESS_POINTER_SET)`

T6963C_WaitReady

Prototype	`sub procedure T6963C_WaitReady()`
Returns	Nothing.
Description	Pools the status byte, and loops until Toshiba Glcd module is ready.
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`T6963C_WaitReady()`

T6963C_Fill

Prototype	`sub procedure T6963C_Fill(dim v as byte, dim start, len as word)`
Returns	Nothing.
Description	Fills controller memory block with given byte. Parameters : - `v:` byte to be written - `start:` starting address of the memory block - `len:` length of the memory block in bytes
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`T6963C_Fill(0x33,0x00FF,0x000F)`

T6963C_Dot

Prototype	`sub procedure T6963C_Dot(dim x, y as integer, dim color as byte)`
Returns	Nothing.
Description	Draws a dot in the current graphic panel of Glcd at coordinates (x, y). Parameters : - `x:` dot position on x-axis - `y:` dot position on y-axis - `color:` color parameter. Valid values: T6963C_BLACK and T6963C_WHITE
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`T6963C_Dot(x0, y0, pcolor)`

T6963C_Write_Char

Prototype	`sub procedure T6963C_Write_Char(dim c, x, y, mode as byte)`
Returns	Nothing.
Description	Writes a char in the current text panel of Glcd at coordinates (x, y). Parameters : - `c:` char to be written - `x:` char position on x-axis - `y:` char position on y-axis - `mode:` mode parameter. Valid values: T6963C_ROM_MODE_OR, T6963C_ROM_MODE_XOR, T6963C_ROM_MODE_AND and T6963C_ROM_MODE_TEXT Mode parameter explanation: - OR Mode: In the OR-Mode, text and graphics can be displayed and the data is logically “OR-ed”. This is the most common way of combining text and graphics for example labels on buttons. - XOR-Mode: In this mode, the text and graphics data are combined via the logical “exclusive OR”. This can be useful to display text in the negative mode, i.e. white text on black background. - AND-Mode: The text and graphic data shown on display are combined via the logical “AND function”. - TEXT-Mode: This option is only available when displaying just a text. The Text Attribute values are stored in the graphic area of display memory. For more details see the T6963C datasheet.
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`T6963C_Write_Char('A',22,23,AND)`

T6963C_Write_Text

Prototype	`sub procedure T6963C_Write_Text(dim byref str as byte[ 10] , dim x, y, mode as byte)`
Returns	Nothing.
Description	Writes text in the current text panel of Glcd at coordinates (x, y). Parameters : - `str:` text to be written - `x:` text position on x-axis - `y:` text position on y-axis - `mode:` mode parameter. Valid values: T6963C_ROM_MODE_OR, T6963C_ROM_MODE_XOR, T6963C_ROM_MODE_AND and T6963C_ROM_MODE_TEXT Mode parameter explanation: - OR Mode: In the OR-Mode, text and graphics can be displayed and the data is logically “OR-ed”. This is the most common way of combining text and graphics for example labels on buttons. - XOR-Mode: In this mode, the text and graphics data are combined via the logical “exclusive OR”. This can be useful to display text in the negative mode, i.e. white text on black background. - AND-Mode: The text and graphic data shown on display are combined via the logical “AND function”. - TEXT-Mode: This option is only available when displaying just a text. The Text Attribute values are stored in the graphic area of display memory. For more details see the T6963C datasheet.
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`T6963C_Write_Text(" GLCD LIBRARY DEMO, WELCOME !", 0, 0, T6963C_ROM_MODE_XOR)`

T6963C_Line

Prototype	`sub procedure T6963C_Line(dim x0, y0, x1, y1 as integer, dim pcolor as byte)`
Returns	Nothing.
Description	Draws a line from (x0, y0) to (x1, y1). Parameters : - `x0:` x coordinate of the line start - `y0:` y coordinate of the line end - `x1:` x coordinate of the line start - `y1:` y coordinate of the line end - `pcolor:` color parameter. Valid values: T6963C_BLACK and T6963C_WHITE
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`T6963C_Line(0, 0, 239, 127, T6963C_WHITE)`

T6963C_Rectangle

Prototype	`sub procedure T6963C_Rectangle(dim x0, y0, x1, y1 as integer, dim pcolor as byte)`
Returns	Nothing.
Description	Draws a rectangle on Glcd. Parameters : - `x0:` x coordinate of the upper left rectangle corner - `y0:` y coordinate of the upper left rectangle corner - `x1:` x coordinate of the lower right rectangle corner - `y1:` y coordinate of the lower right rectangle corner - `pcolor:` color parameter. Valid values: T6963C_BLACK and T6963C_WHITE
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`T6963C_Rectangle(20, 20, 219, 107, T6963C_WHITE)`

T6963C_Box

Prototype	`sub procedure T6963C_Box(dim x0, y0, x1, y1 as integer, dim pcolor as byte)`
Returns	Nothing.
Description	Draws a box on Glcd Parameters : - `x0:` x coordinate of the upper left box corner - `y0:` y coordinate of the upper left box corner - `x1:` x coordinate of the lower right box corner - `y1:` y coordinate of the lower right box corner - `pcolor:` color parameter. Valid values: T6963C_BLACK and T6963C_WHITE
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`T6963C_Box(0, 119, 239, 127, T6963C_WHITE)`

T6963C_Circle

Prototype	`sub procedure T6963C_Circle(dim x, y as integer, dim r as longint, dim pcolor as byte)`
Returns	Nothing.
Description	Draws a circle on Glcd. Parameters : - `x:` x coordinate of the circle center - `y:` y coordinate of the circle center - `r:` radius size - `pcolor:` color parameter. Valid values: T6963C_BLACK and T6963C_WHITE
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`T6963C_Circle(120, 64, 110, T6963C_WHITE)`

T6963C_Image

Prototype	`sub procedure T6963C_Image(const pic as ^byte)`
Returns	Nothing.
Description	Displays bitmap on Glcd. Parameters : - `pic:` image to be displayed. Bitmap array can be located in both code and RAM memory (due to the mikroBasic PRO for AVR pointer to const and pointer to RAM equivalency). Use the mikroBasic PRO's integrated Glcd Bitmap Editor (menu option **Tools › Glcd Bitmap Editor**) to convert image to a constant array suitable for displaying on Glcd.
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`T6963C_Image(mc)`

T6963C_Sprite

Prototype	`sub procedure T6963C_Sprite(dim px, py, sx, sy as byte, const pic as ^byte)`
Returns	Nothing.
Description	Fills graphic rectangle area (px, py) to (px+sx, py+sy) with custom size picture. Parameters : - `px:` x coordinate of the upper left picture corner. Valid values: multiples of the font width - `py:` y coordinate of the upper left picture corner - `pic:` picture to be displayed - `sx:` picture width. Valid values: multiples of the font width - `sy:` picture height **Note:** If `px` and `sx` parameters are not multiples of the font width they will be scaled to the nearest lower number that is a multiple of the font width.
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`T6963C_Sprite(76, 4, einstein, 88, 119) ' draw a sprite`

T6963C_Set_Cursor

Prototype	`sub procedure T6963C_Set_Cursor(dim x, y as byte)`
Returns	Nothing.
Description	Sets cursor to row x and column y. Parameters : - `x:` cursor position row number - `y:` cursor position column number
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`T6963C_Set_Cursor(cposx, cposy)`

T6963C_DisplayGrPanel

Prototype	`sub procedure T6963C_DisplayGrPanel(dim n as byte)`
Returns	Nothing.
Description	Display selected graphic panel. Parameters : - `n:` graphic panel number. Valid values: 0 and 1.
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`' display graphic panel 1` `T6963C_DisplayGrPanel(1)`

T6963C_DisplayTxtPanel

Prototype	`sub procedure T6963C_DisplayTxtPanel(dim n as byte)`
Returns	Nothing.
Description	Display selected text panel. Parameters : - `n:` text panel number. Valid values: 0 and 1.
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`' display text panel 1` `T6963C_DisplayTxtPanel(1)`

T6963C_SetGrPanel

Prototype	`sub procedure T6963C_SetGrPanel(dim n as byte)`
Returns	Nothing.
Description	Compute start address for selected graphic panel and set appropriate internal pointers. All subsequent graphic operations will be preformed at this graphic panel. Parameters : - `n:` graphic panel number. Valid values: `0` and `1`.
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`' set graphic panel 1 as current graphic panel.` `T6963C_SetGrPanel(1)`

T6963C_SetTxtPanel

Prototype	`sub procedure T6963C_SetTxtPanel(dim n as byte)`
Returns	Nothing.
Description	Compute start address for selected text panel and set appropriate internal pointers. All subsequent text operations will be preformed at this text panel. Parameters : - `n:` text panel number. Valid values: `0` and `1`.
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`' set text panel 1 as current text panel.` `T6963C_SetTxtPanel(1)`

T6963C_PanelFill

Prototype	`sub procedure T6963C_PanelFill(dim v as byte)`
Returns	Nothing.
Description	Fill current panel in full (graphic+text) with appropriate value (0 to clear). Parameters : - `v:` value to fill panel with.
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`clear current panel` `T6963C_PanelFill(0)`

T6963C_GrFill

Prototype	`sub procedure T6963C_PanelFill(dim v as byte)`
Returns	Nothing.
Description	Fill current panel in full (graphic+text) with appropriate value (0 to clear). Parameters : - `v:` value to fill panel with.
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`clear current panel` `T6963C_PanelFill(0)`

T6963C_TxtFill

Prototype	`sub procedure T6963C_TxtFill(dim v as byte)`
Returns	Nothing.
Description	Fill current text panel with appropriate value (0 to clear). Parameters : - `v:` this value increased by 32 will be used to fill text panel.
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`' clear current text panel` `T6963C_TxtFill(0)`

T6963C_Cursor_Height

Prototype	`sub procedure T6963C_Cursor_Height(dim n as byte)`
Returns	Nothing.
Description	Set cursor size. Parameters : - `n:` cursor height. Valid values: 0..7.
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`T6963C_Cursor_Height(7)`

T6963C_Graphics

Prototype	`sub procedure T6963C_Graphics(dim n as byte)`
Returns	Nothing.
Description	Enable/disable graphic displaying. Parameters : - `n:` on/off parameter. Valid values: `0` (disable graphic dispaying) and `1` (enable graphic displaying).
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`' enable graphic displaying` `T6963C_Graphics(1)`

T6963C_Text

Prototype	`sub procedure T6963C_Text(dim n as byte)`
Returns	Nothing.
Description	Enable/disable text displaying. Parameters : - `n:` on/off parameter. Valid values: `0` (disable text dispaying) and `1` (enable text displaying).
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`' enable text displaying` `T6963C_Text(1)`

T6963C_Cursor

Prototype	`sub procedure T6963C_Cursor(dim n as byte)`
Returns	Nothing.
Description	Set cursor on/off. Parameters : - `n:` on/off parameter. Valid values: `0` (set cursor off) and `1` (set cursor on).
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`' set cursor on` `T6963C_Cursor(1)`

T6963C_Cursor_Blink

Prototype	`sub procedure T6963C_Cursor_Blink(dim n as byte)`
Returns	Nothing.
Description	Enable/disable cursor blinking. Parameters : - `n:` on/off parameter. Valid values: 0 (disable cursor blinking) and 1 (enable cursor blinking).
Requires	Toshiba Glcd module needs to be initialized. See the T6963C_Init routine.
Example	`' enable cursor blinking` `T6963C_Cursor_Blink(1)`

Library Example

The following drawing demo tests advanced routines of the T6963C Glcd library. Hardware configurations in this example are made for the T6963C 240x128 display, EasyAVR5A board and ATmega16.

```
program T6963C_240x128

include __Lib_T6963C_Consts
include bitmap
include bitmap2

' T6963C module connections
dim T6963C_ctrlPort as byte at PORTC                    ' CONTROL port
dim T6963C_dataPort as byte at PORTD                     ' DATA port
dim T6963C_ctrlPort_Direction as byte at DDRC         ' CONTROL direc-
tion register
dim T6963C_dataPort_Direction as byte at DDRD          ' DATA direc-
tion register

dim T6963C_ctrlwr as sbit at PORTC.B2       ' WR write signal
dim T6963C_ctrlrd as sbit at PORTC.B1       ' RD read signal
dim T6963C_ctrlcd as sbit at PORTC.B0       ' CD command/data signal
dim T6963C_ctrlrst as sbit at PORTC.B4      ' RST reset signal
dim T6963C_ctrlwr_Direction as sbit at DDRC.B2        ' WR write sig-
nal direction
dim T6963C_ctrlrd_Direction as sbit at DDRC.B1         ' RD read sig-
nal direction
dim  T6963C_ctrlcd_Direction  as  sbit  at  DDRC.B0              '  CD
command/data signal direction
dim T6963C_ctrlrst_Direction as sbit at DDRC.B4         ' RST reset
signal direction

' Signals not used by library, they are set in main sub function
dim T6963C_ctrlce as sbit at PORTC.B3                    ' CE signal
dim T6963C_ctrlfs as sbit at PORTC.B6                    ' FS signal
dim T6963C_ctrlmd as sbit at PORTC.B5                    ' MD signal
dim T6963C_ctrlce_Direction as sbit at DDRC.B3          ' CE signal
direction
dim T6963C_ctrlfs_Direction as sbit at DDRC.B6          ' FS signal
direction
dim T6963C_ctrlmd_Direction as sbit at DDRC.B5          ' MD signal
direction
' End T6963C module connections

dim    panel as byte           ' current panel
           i as word            ' general purpose register
        curs as byte            ' cursor visibility
       cposx,
       cposy as word            ' cursor x-y position
       txtcols as byte          ' number of text coloms
       txt, txt1 as string[ 29]

  txt1 = " EINSTEIN WOULD HAVE LIKED mE"
  txt  = " GLCD LIBRARY DEMO, WELCOME !"
```

```
DDRA = 0x00                          ' configure PORTA as input

DDA0_bit = 0                             ' Set PB0 as input
DDA1_bit = 0                             ' Set PB1 as input
DDA2_bit = 0                             ' Set PB2 as input
DDA3_bit = 0                             ' Set PB3 as input
DDA4_bit = 0                             ' Set PB4 as input

T6963C_ctrlce_Direction = 1
T6963C_ctrlce = 0                   ' Enable T6963C
T6963C_ctrlfs_Direction = 1
T6963C_ctrlfs = 0                   ' Font Select 8x8
T6963C_ctrlmd_Direction = 1
T6963C_ctrlmd = 0                   ' Column number select

panel = 0
i = 0
curs = 0
cposx = 0
cposy = 0

' Initialize T6369C
T6963C_init(240, 128, 8)

{*
 * Enable both graphics and text display at the same time
 *}
T6963C_graphics(1)
T6963C_text(1)

{*
 * Text messages
 *}
T6963C_write_text(txt, 0, 0, T6963C_ROM_MODE_XOR)
T6963C_write_text(txt1, 0, 15, T6963C_ROM_MODE_XOR)


{*
 * Cursor
 *}
T6963C_cursor_height(8)            ' 8 pixel height
T6963C_set_cursor(0, 0)            ' Move cursor to top left
T6963C_cursor(0)                    ' Cursor off

{*
 * Draw rectangles
 *}
T6963C_rectangle(0, 0, 239, 127, T6963C_WHITE)
T6963C_rectangle(20, 20, 219, 107, T6963C_WHITE)
T6963C_rectangle(40, 40, 199, 87, T6963C_WHITE)
T6963C_rectangle(60, 60, 179, 67, T6963C_WHITE)
```

```
{*
    * Draw a cross
    *}
   T6963C_line(0, 0, 239, 127, T6963C_WHITE)
   T6963C_line(0, 127, 239, 0, T6963C_WHITE)

   {*
    * Draw solid boxes
    *}
   T6963C_box(0, 0, 239, 8, T6963C_WHITE)
   T6963C_box(0, 119, 239, 127, T6963C_WHITE)
    'while true do nop
   {*
    * Draw circles
    *}
   T6963C_circle(120, 64, 10, T6963C_WHITE)
   T6963C_circle(120, 64, 30, T6963C_WHITE)
   T6963C_circle(120, 64, 50, T6963C_WHITE)
   T6963C_circle(120, 64, 70, T6963C_WHITE)
   T6963C_circle(120, 64, 90, T6963C_WHITE)
   T6963C_circle(120, 64, 110, T6963C_WHITE)
   T6963C_circle(120, 64, 130, T6963C_WHITE)

   T6963C_sprite(76, 4, @einstein, 88, 119)       ' Draw a sprite

   T6963C_setGrPanel(1)        ' Select other graphic panel

   T6963C_image(@mikroe)

   while TRUE                                     ' Endless loop


     '*
      '* If PORTA_0 is pressed, toggle the display between graphic
panel 0 and graphic 1
     '*
     if( PINA0_bit = 0) then
         Inc(panel)
         panel = panel and 1
        T6963C_setPtr((T6963C_grMemSize + T6963C_txtMemSize) * panel,
T6963C_GRAPHIC_HOME_ADDRESS_SET)
         Delay_ms(300)

     '*
     '* If PORTA_1 is pressed, display only graphic panel
     '*
     else
       if ( PINA1_bit = 0) then
           T6963C_graphics(1)
           T6963C_text(0)
           Delay_ms(300)
```

```
'*
    '* If PORTA_2 is pressed, display only text panel
    '*
      else
        if ( PINA2_bit = 0) then
            T6963C_graphics(0)
            T6963C_text(1)
            Delay_ms(300)

    '*
    '* If PORTA_3 is pressed, display text and graphic panels
    '*
        else
          if ( PINA3_bit = 0) then
              T6963C_graphics(1)
              T6963C_text(1)
              Delay_ms(300)

    '*
    '* If PORTA_4 is pressed, change cursor
    '*
          else
            if( PINA4_bit = 0) then
              Inc(curs)
              if (curs = 3) then
                curs = 0
              end if
              select case curs
                case 0
                   ' no cursor
                   T6963C_cursor(0)
                case 1
                   ' blinking cursor
                   T6963C_cursor(1)
                   T6963C_cursor_blink(1)
                case 2
                   ' non blinking cursor
                   T6963C_cursor(1)
                   T6963C_cursor_blink(0)
              end select
                Delay_ms(300)

            end if
          end if
        end if
      end if
    end if
```

```
    '*
    '* Move cursor, even if not visible
    '*
    Inc(cposx)
    if (cposx = T6963C_txtCols) then
      cposx = 0
      Inc(cposy)
      if (cposy = T6963C_grHeight / T6963C_CHARACTER_HEIGHT) then
        cposy = 0
      end if
    end if
    T6963C_set_cursor(cposx, cposy)

    Delay_ms(100)
  wend
end.
```

HW Connection

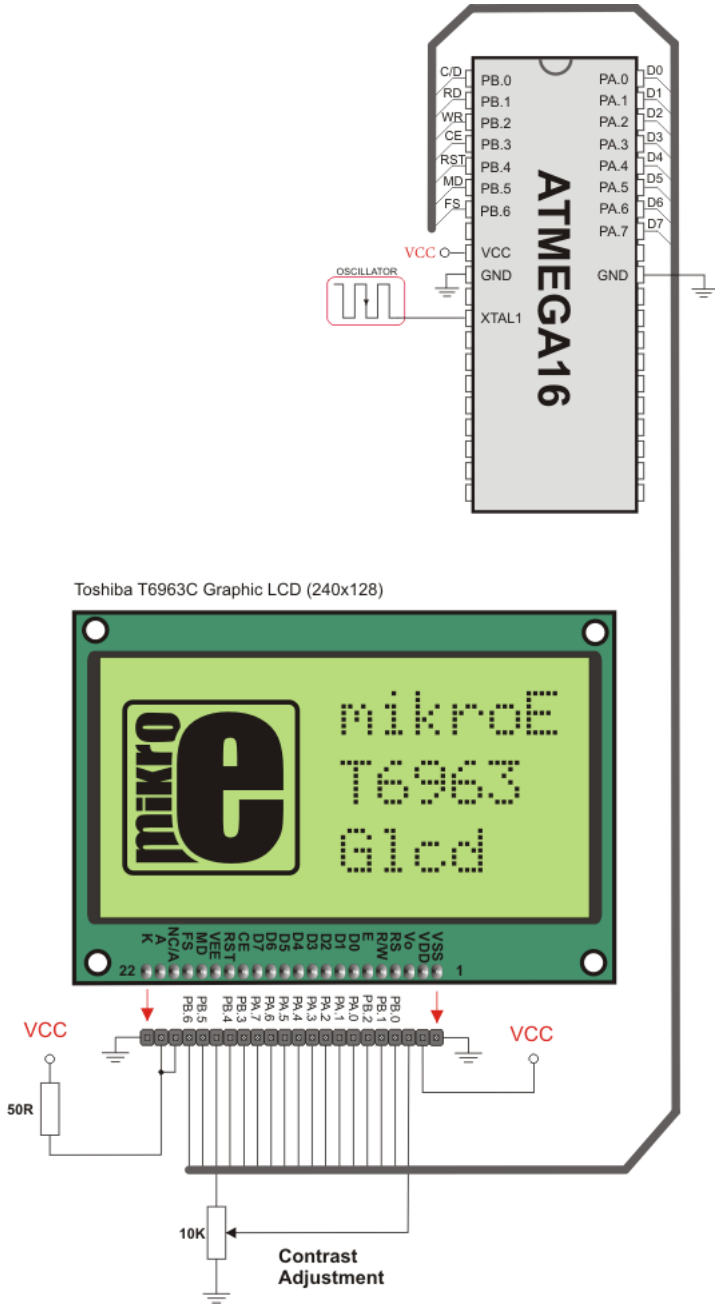

T6963C Glcd HW connection

TWI LIBRARY

TWI full master MSSP module is available with a number of AVR MCU models. mikroBasic PRO for AVR provides library which supports the master TWI mode.

Library Routines

- TWI_Init
- TWI_Busy
- TWI_Start
- TWI_Stop
- TWI_Read
- TWI_Write
- TWI_Status
- TWI_Close

TWI_Init

Prototype	`sub procedure TWI_Init(dim clock as longword)`
Returns	Nothing.
Description	Initializes TWI with desired `clock` (refer to device data sheet for correct values in respect with Fosc). Needs to be called before using other functions of TWI Library. You don't need to configure ports manually for using the module; library will take care of the initialization.
Requires	Library requires MSSP module on PORTB or PORTC.
Example	`TWI_Init(100000)`

TWI_Busy

Prototype	`sub function TWI_Busy() as byte`
Returns	Returns 0 if TWI start sequnce is finished, 1 if TWI start sequnce is not finished.
Description	Signalizes the status of TWI bus.
Requires	TWI must be configured before using this function. See TWI_Init.

Example	`if (TWI_Busy = 1)`
	`  ...`
	`end if`

TWI_Start

Prototype	`sub function TWI_Start() as byte`
Returns	If there is no error function returns 0, otherwise returns 1.
Description	Determines if TWI bus is free and issues START signal.
Requires	TWI must be configured before using this function. See TWI_Init.

Example	`if (TWI_Start = 1)`
	`  ...`
	`end if`

TWI_Read

Prototype	`sub function TWI_Read(dim ack as byte) as byte`
Returns	Returns one byte from the slave.
Description	Reads one byte from the slave, and sends not acknowledge signal if parameter ack is 0, otherwise it sends acknowledge.
Requires	TWI must be configured before using this function. See TWI_Init. Also, START signal needs to be issued in order to use this function. See TWI_Start.
Example	Read data and send not acknowledge signal: `tmp = TWI_Read(0)`

TWI_Write

Prototype	`sub procedure TWI_Write(dim data_ as byte)`
Returns	Nothing.
Description	Sends data byte (parameter data_) via TWI bus.
Requires	TWI must be configured before using this function. See TWI_Init. Also, START signal needs to be issued in order to use this function. See TWI_Start.
Example	`TWI_Write(0xA3)`

TWI_Stop

Prototype	`sub procedure TWI_Stop()`
Returns	Nothing.
Description	Issues STOP signal to TWI operation.
Requires	TWI must be configured before using this function. See TWI_Init.
Example	`TWI_Stop()`

TWI_Status

Prototype	`sub function TWI_Status() as byte`
Returns	Returns value of status register (TWSR), the highest 5 bits.
Description	Returns status of TWI.
Requires	TWI must be configured before using this function. See TWI_Init.
Example	`status = TWI_Status()`

TWI_Close

Prototype	`sub procedure TWI_Close()`
Returns	Nothing.
Description	Closes TWI connection.
Requires	TWI must be configured before using this function. See TWI_Init.
Example	`TWI_Close()`

Library Example

This code demonstrates use of TWI Library procedures and functions. AVR MCU is connected (SCL, SDA pins) to 24c02 EEPROM. Program sends data to EEPROM (data is written at address 2). Then, we read data via TWI from EEPROM and send its value to PORTA, to check if the cycle was successful. Check the figure below.

```
program TWI_Simple

main:
  DDRA = 0xFF                ' configure PORTA as output

  TWI_Init(100000)           ' initialize TWI communication
  TWI_Start()                ' issue TWI start signal
  TWI_Write(0xA2)            ' send byte via TWI (device address + W)
  TWI_Write(2)               ' send byte (address of EEPROM location)
  TWI_Write(0xAA)            ' send data (data to be written)
  TWI_Stop()                 ' issue TWI stop signal

  Delay_100ms()

  TWI_Start()                ' issue TWI start signal
  TWI_Write(0xA2)            ' send byte via TWI (device address + W)
  TWI_Write(2)               ' send byte (data address)
  TWI_Start()                ' issue TWI signal repeated start
  TWI_Write(0xA3)            ' send byte (device address + R)
  PORTA = TWI_Read(0)        ' read data (NO acknowledge)
  TWI_Stop()                 ' issue TWI stop signal}
end.
```

HW Connection

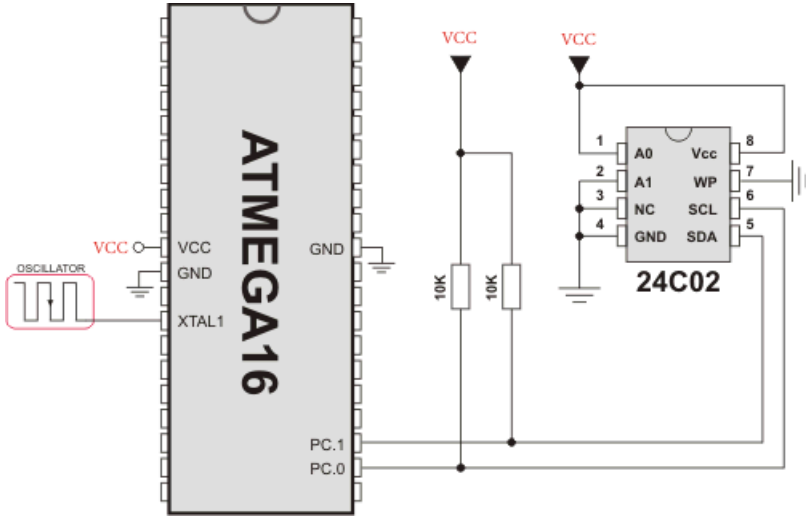

Interfacing 24c02 to AVR via TWI

UART LIBRARY

UART hardware module is available with a number of AVR MCUs. mikroBasic PRO for AVR UART Library provides comfortable work with the Asynchronous (full duplex) mode.

You can easily communicate with other devices via RS-232 protocol (for example with PC, see the figure at the end of the topic – RS-232 HW connection). You need a AVR MCU with hardware integrated UART, for example ATmega16. Then, simply use the functions listed below.

Library Routines

- UARTx_Init
- UARTx_Init_Advanced
- UARTx_Data_Ready
- UARTx_Read
- UARTx_Read_Text
- UARTx_Write
- UARTx_Write_Text

The following routine is for the internal use by compiler only:

- UARTx_TX_Idle

Note: AVR MCUs require you to specify the module you want to use. To select the desired UART, simply change the letter `x` in the prototype for a number from `1` to `4`. Number of UART modules per MCU differs from chip to chip. Please, read the appropriate datasheet before utilizing this library.

Example: `UART2_Init()` initializes UART 2 module.

Note: Some of the AVR MCUs do not support UARTx_Init_Advanced routine. Please, refer to the appropriate datasheet.

UARTx_Init

Prototype	`sub procedure UARTx_Init(dim baud_rate as longint)`
Returns	Nothing.
Description	Configures and initializes the UART module. The internal UART module module is set to: - receiver enabled - transmitter enabled - frame size 8 bits - 1 STOP bit - parity mode disabled - asynchronous operation Parameters : - `baud_rate:` requested baud rate Refer to the device data sheet for baud rates allowed for specific Fosc.
Requires	You'll need AVR MCU with hardware UART. UARTx_Init needs to be called before using other functions from UART Library.
Example	`'This will initialize hardware UART1 module and establish the communication at 2400 bps` `UART1_Init(2400)`

UARTx_Init_Advanced

<table>
<tr><td>Prototype</td><td>sub procedure UARTx_Init_Advanced(dim baud_rate as longword, dim parity as byte, dim stop_bits as byte)</td></tr>
<tr><td>Returns</td><td>Nothing.</td></tr>
<tr><td>Description</td><td>Configures and initializes UART module.

Parameter baud_rate configures UART module to work on a requested baud rate. Parameters parity and stop_bits determine the work mode for UART, and can have the following values:
<table>
<tr><th>Mask</th><th>Description</th><th>Predefined library const</th></tr>
<tr><td colspan="3">Parity constants:</td></tr>
<tr><td>0x00</td><td>Parity mode disabled</td><td>_UART_NOPARITY</td></tr>
<tr><td>0x20</td><td>Even parity</td><td>_UART_EVENPARITY</td></tr>
<tr><td>0x30</td><td>Odd parity</td><td>_UART_ODDPARITY</td></tr>
<tr><td colspan="3">Stop bit constants:</td></tr>
<tr><td>0x00</td><td>1 stop bit</td><td>_UART_ONE_STOPBIT</td></tr>
<tr><td>0x01</td><td>2 stop bits</td><td>_UART_TWO_STOPBITS</td></tr>
</table>
Note: Some MCUs do not support advanced configuration of the UART module. Please consult appropriate daatsheet.</td></tr>
<tr><td>Requires</td><td>MCU must have UART module.</td></tr>
<tr><td>Example</td><td>' Initialize hardware UART1 module and establish communication at 9600 bps, 8-bit data, even parity and 2 STOP bits
UART1_Init_Advanced(9600, _UART_EVENPARITY, _UART_TWO_STOPBITS)</td></tr>
</table>

UARTx_Data_Ready

Prototype	`sub function UARTx_Data_Ready() as byte`
Returns	Function returns `1` if data is ready or `0` if there is no data.
Description	The function tests if data in receive buffer is ready for reading.
Requires	MCU with the UART module. The UART module must be initialized before using this routine. See the UARTx_Init routine.

Example	`dim receive as byte`
	`...`
	`' read data if ready`
	`if (UART1_Data_Ready() = 1) then`
	`  receive = UART1_Read()`

UARTx_Read

Prototype	`sub function UARTx_Read() as byte`
Returns	Received byte.
Description	The function receives a byte via UART. Use the UARTx_Data_Ready function to test if data is ready first.
Requires	MCU with the UART module. The UART module must be initialized before using this routine. See UARTx_Init routine.

Example	`dim receive as byte`
	`...`
	`' read data if ready`
	`if (UART1_Data_Ready() = 1) then`
	`  receive = UART1_Read()`

UARTx_Read_Text

Prototype	`sub procedure UARTx_Read_Text(dim byref Output as string[255], dim byref Delimiter as string[10], dim Attempts as byte)`
Returns	Nothing.
Description	Reads characters received via UART until the delimiter sequence is detected. The read sequence is stored in the parameter `output`; delimiter sequence is stored in the parameter `delimiter`. This is a blocking call: the delimiter sequence is expected, otherwise the procedure exits(if the delimiter is not found). Attempts defines number of received characters in which Delimiter sequence is expected. If Attempts is set to 255, this routine will continously try to detect the Delimiter sequence.
Requires	UART HW module must be initialized and communication established before using this function. See UARTx_Init.

Example	Read text until the sequence “OK” is received, and send back what’s been received:
	
	`UART1_Init(4800)  ' initialize UART module`
	`Delay_ms(100)`
	
	`while TRUE`
	`  if (UART1_Data_Ready() = 1)  ' if data is received`
	`    UART1_Read_Text(output, 'delim', 10)  ' reads text until 'delim' is found`
	`    UART1_Write_Text(output)  ' sends back text`
	`  end if`
	`wend.`

UARTx_Write

Prototype	`sub procedure UARTx_Write(dim TxData as byte)`
Returns	Nothing.
Description	The function transmits a byte via the UART module. Parameters : - `TxData:` data to be sent
Requires	MCU with the UART module. The UART module must be initialized before using this routine. See UARTx_Init routine.

Example	`dim data_ as byte`
	`...`
	`data_ = 0x1E`
	`UART1_Write(data_)`

UARTx_Write_Text

Prototype	`sub procedure UARTx_Write_Text(dim byref uart_text as string[255])`
Returns	Nothing.
Description	Sends text (parameter uart_text) via UART. Text should be zero terminated.
Requires	UART HW module must be initialized and communication established before using this function. See UARTx_Init.

Example	Read text until the sequence “OK” is received, and send back what’s been received:
	`UART1_Init(4800)  ' initialize UART module`
	`Delay_ms(100)`
	
	`while TRUE`
	`  if (UART1_Data_Ready() = 1)  ' if data is received`
	`    UART1_Read_Text(output, 'delim', 10)  ' reads text until 'delim' is found`
	`    UART1_Write_Text(output)  ' sends back text`
	`  end if`
	`wend.`

Library Example

This example demonstrates simple data exchange via UART. If MCU is connected to the PC, you can test the example from the mikroBasic PRO for AVR USART Terminal.

```
program UART
dim uart_rd as byte

main:
  UART1_Init(19200)       ' Initialize UART module at 9600 bps
  Delay_ms(100)           ' Wait for UART module to stabilize

  while TRUE                                    ' Endless loop
      if (UART1_Data_Ready() <> 0) then     ' If data is received,
          uart_rd = UART1_Read()        '    read the received data,
          UART1_Write(uart_rd)          '    and send data via UART
      end if
  wend
end.
```

HW Connection

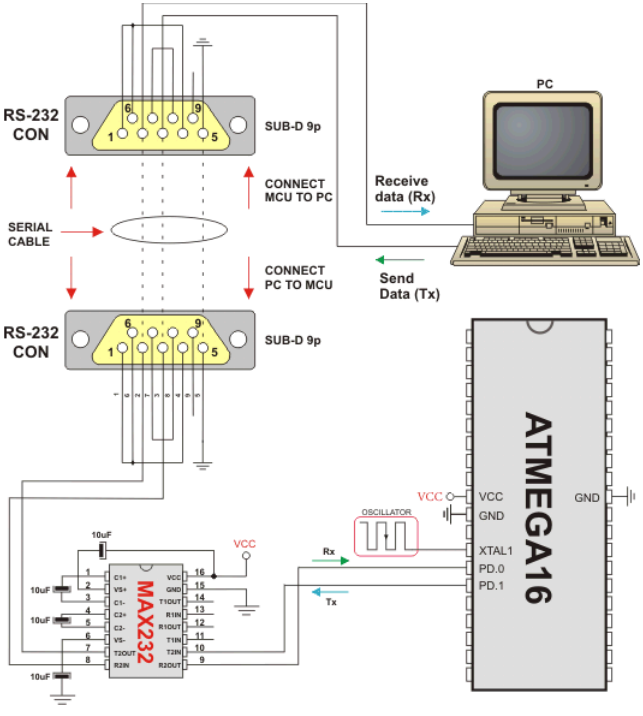

UART HW connection

BUTTON LIBRARY

The Button library contains miscellaneous routines useful for a project development.

External dependencies of Button Library

The following variable must be defined in all projects using Button library:	Description:	Example :
`dim Button_Pin as sbit sfr external`	Declares button pins.	`dim Button_Pin as sbit at PINB.B0`
`dim Button_Pin_Direction as sbit sfr external`	Declares direction of the button pin.	`dim Button_Pin_Direction as sbit at DDRB.B0`

Library Routines

- Button

Button

Prototype	`sub function Button(dim time_ms as byte, dim active_state as byte) as byte`
Returns	- 255 if the pin was in the active state for given period. - 0 otherwise
Description	The function eliminates the influence of contact flickering upon pressing a button (debouncing). The Button pin is tested just after the function call and then again after the debouncing period has expired. If the pin was in the active state in both cases then the function returns 255 (true). Parameters : - `time_ms :` debouncing period in milliseconds - `active_state:` determines what is considered as active state. Valid values: `0` (logical zero) and `1` (logical one)
Requires	Global variables : - `Button_Pin:` Button pin line - `Button_Pin_Direction:` Direction of the button pin must be defined before using this function.

Example

PORTC is inverted on every PORTB.B0 one-to-zero transition :

```
program Button

' Button connections
dim Button_Pin as sbit at PINB.B0
dim Button_Pin_Direction as sbit at DDRB.B0
' End Button connections

dim oldstate as bit                    ' Old state flag

main:
  Button_Pin_Direction = 0            ' Set Button pin as input

  DDRC  = 0xFF                         ' Configure PORTC as output
  PORTC = 0xAA                         ' Initial PORTC value

  oldstate = 0                         ' oldstate initial value

  while TRUE
    if (Button(1, 1) = 1)             ' Detect logical one
      oldstate = 1                     ' Update flag
    end if
    if (oldstate and Button(1, 0)) then ' Detect one-to-zero
transition
      PORTC = not PORTC                  ' Invert PORTC
      oldstate = 0                       ' Update flag
    end if
  wend                                   ' Endless loop

end.
```

CONVERSIONS LIBRARY

mikroBasic PRO for AVR Conversions Library provides routines for numerals to strings and BCD/decimal conversions.

Library Routines

You can get text representation of numerical value by passing it to one of the following routines:

- ByteToStr
- ShortToStr
- WordToStr
- IntToStr
- LongintToStr
- LongWordToStr
- FloatToStr

The following sub functions convert decimal values to BCD and vice versa:

- Dec2Bcd
- Bcd2Dec16
- Dec2Bcd16

ByteToStr

Prototype	`sub procedure ByteToStr(dim input as word, dim byref output as string[ 2] )`
Returns	Nothing.
Description	Converts input byte to a string. The output string is right justified and remaining positions on the left (if any) are filled with blanks. Parameters : - `input:` byte to be converted - `output:` destination string
Requires	Nothing.

Example	`dim t as word`
	`  txt as string[ 2]`
	`...`
	`t = 24`
	`ByteToStr(t, txt)  ' txt is " 24" (one blank here)`

ShortToStr

Prototype	`sub procedure ShortToStr(dim input as short, dim byref output as string[ 3] )`
Returns	Nothing.
Description	Converts input short (signed byte) number to a string. The output string is right justified and remaining positions on the left (if any) are filled with blanks. Parameters : - `input:` short number to be converted - `output:` destination string
Requires	Nothing.

Example	`dim t as short`
	`  txt as string[ 3]`
	`...`
	`t = -24`
	`ByteToStr(t, txt)  ' txt is " -24" (one blank here)`

WordToStr

Prototype	`sub procedure WordToStr(dim input as word, dim byref output as string[ 4] )`
Returns	Nothing.
Description	Converts input word to a string. The output string is right justified and the remaining positions on the left (if any) are filled with blanks. Parameters : - `input:` word to be converted - `output:` destination string
Requires	Nothing.

Example	`dim t as word`
	`  txt as string[ 4]`
	`...`
	`t = 437`
	`WordToStr(t, txt)  ' txt is "  437" (two blanks here)`

IntToStr

Prototype	`sub procedure IntToStr(dim input as integer, dim byref output as string[ 5]`
Returns	Nothing.
Description	Converts input integer number to a string. The output string is right justified and the remaining positions on the left (if any) are filled with blanks. Parameters : - `input:` integer number to be converted - `output:` destination string
Requires	Nothing.

Example	`dim input as integer`
	`  txt as string[ 5]`
	`'...`
	
	`input = -4220`
	`IntToStr(input, txt)  ' txt is ' -4220'`

LongintToStr

Prototype	`sub procedure LongintToStr(dim input as longint, dim byref output as string[ 10] )`
Returns	Nothing.
Description	Converts input longint number to a string. The output string is right justified and the remaining positions on the left (if any) are filled with blanks. Parameters : - `input:` longint number to be converted - `output:` destination string
Requires	Nothing.

Example	`dim input as longint`
	`  txt as string[ 10]`
	`'...`
	
	`input = -12345678`
	`IntToStr(input, txt)  ' txt is '  -12345678'`

LongWordToStr

Prototype	`sub procedure LongWordToStr(dim input as longword, dim byref output as string[ 9] )`
Returns	Nothing.
Description	Converts input double word number to a string. The output string is right justified and the remaining positions on the left (if any) are filled with blanks. Parameters : - `input:` double word number to be converted - `output:` destination string
Requires	Nothing.

Example	`dim input as longint`
	`  txt as string[ 9]`
	`'...`
	
	`input = 12345678`
	`IntToStr(input, txt)  ' txt is '  12345678'`

FloatToStr

Prototype	`sub function FloatToStr(dim input as real, dim byref output as string[ 22] )`
Returns	- 3 if input number is NaN - 2 if input number is -INF - 1 if input number is +INF - 0 if conversion was successful
Description	Converts a floating point number to a string. Parameters : - `input:` floating point number to be converted - `output:` destination string The output string is left justified and null terminated after the last digit. **Note:** Given floating point number will be truncated to 7 most significant digits before conversion.
Requires	Nothing.

Example	`dim ff1, ff2, ff3 as real`
	`txt as string[ 22]`
	`...`
	`ff1 = -374.2`
	`ff2 = 123.456789`
	`ff3 = 0.000001234`
	
	`FloatToStr(ff1, txt)  ' txt is "-374.2"`
	`FloatToStr(ff2, txt)  ' txt is "123.4567"`
	`FloatToStr(ff3, txt)  ' txt is "1.234e-6"`

Dec2Bcd

Prototype	`sub function Dec2Bcd(dim decnum as byte) as byte`
Returns	Converted BCD value.
Description	Converts input number to its appropriate BCD representation. Parameters : - `decnum:` number to be converted
Requires	Nothing.

Example	`dim a, b as byte`
	`...`
	`a = 22`
	`b = Dec2Bcd(a) ' b equals 34`

Bcd2Dec16

Prototype	`sub function Bcd2Dec16(dim bcdnum as word) as word`
Returns	Converted decimal value.
Description	Converts 16-bit BCD numeral to its decimal equivalent. Parameters : - `bcdnum:` 16-bit BCD numeral to be converted
Requires	Nothing.

Example	`dim a, b as word`
	`...`
	`a = 0x1234 ' a equals 4660`
	`b = Bcd2Dec16(a) ' b equals 1234`

Dec2Bcd16

Prototype	`sub function Dec2Bcd16(dim decnum as word) as word`
Returns	Converted BCD value.
Description	Converts decimal value to its BCD equivalent. Parameters : - `decnum` decimal number to be converted
Requires	Nothing.

Example	`dim a, b as word`
	`...`
	`a = 2345`
	`b = Dec2Bcd16(a)  ' b equals 9029`

MATH LIBRARY

The mikroBasic PRO for AVR provides a set of library functions for floating point math handling. See also Predefined Globals and Constants for the list of predefined math constants.

Library Functions

- acos
- asin
- atan
- atan2
- ceil
- cos
- cosh
- eval_poly
- exp
- fabs
- floor
- frexp
- ldexp
- log
- log10
- modf
- pow
- sin
- sinh
- sqrt
- tan
- tanh

acos

Prototype	`sub function acos(dim x as real) as real`
Description	The function returns the arc cosine of parameter x; that is, the value whose cosine is x. The input parameter x must be between -1 and 1 (inclusive). The return value is in radians, between 0 and đ (inclusive).

asin

Prototype	`sub function asin(dim x as real) as real`
Description	The function returns the arc sine of parameter x; that is, the value whose sine is x. The input parameter x must be between -1 and 1 (inclusive). The return value is in radians, between -п/2 and п/2 (inclusive).

atan

Prototype	`sub function atan(dim arg as real) as real`
Description	The function computes the arc tangent of parameter arg; that is, the value whose tangent is arg. The return value is in radians, between -П/2 and П/2 (inclusive).

atan2

Prototype	`sub function atan2(dim y as real, dim x as real) as real`
Description	This is the two-argument arc tangent function. It is similar to computing the arc tangent of y/x, except that the signs of both arguments are used to determine the quadrant of the result and x is permitted to be zero. The return value is in radians, between -П and П (inclusive).

ceil

Prototype	`sub function ceil(dim x as real) as real`
Description	The function returns value of parameter `x` rounded up to the next whole number.

cos

Prototype	`sub function cos(dim arg as real) as real`
Description	The function returns the cosine of `arg` in radians. The return value is from -1 to 1.

cosh

Prototype	`sub function cosh(dim x as real) as real`
Description	The function returns the hyperbolic cosine of `x`, defined mathematically as $(e^{x}+e^{-x})/2$. If the value of `x` is too large (if overflow occurs), the function fails.

eval_poly

Prototype	`sub function eval_poly(dim x as real, dim byref d as array[10] of real, dim n as integer) as real`
Description	Function Calculates polynom for number `x`, with coefficients stored in `d[]`, for degree `n`.

exp

Prototype	`sub function exp(dim x as real) as real`
Description	The function returns the value of e — the base of natural logarithms — raised to the power `x` (i.e. e^x).

fabs

Prototype	`sub function fabs(dim d as real) as real`
Description	The function returns the absolute (i.e. positive) value of `d`.

floor

Prototype	`sub function floor(dim x as real) as real`
Description	The function returns the value of parameter `x` rounded down to the nearest integer.

frexp

Prototype	`sub function frexp(dim value as real, dim byref eptr as integer) as real`
Description	The function splits a floating-point value `value` into a normalized fraction and an integral power of 2. The return value is a normalized fraction and the integer exponent is stored in the object pointed to by eptr.

ldexp

Prototype	`sub function ldexp(dim value as real, dim newexp as integer) as real`
Description	The function returns the result of multiplying the floating-point number `value` by 2 raised to the power newexp (i.e. returns `value * 2^newexp`).

log

Prototype	`sub function log(dim x as real) as real`
Description	The function returns the natural logarithm of `x` (i.e. $\log_e(x)$).

log10

Prototype	`sub function log10(dim x as real) as real`
Description	The function returns the base-10 logarithm of `x` (i.e. $\log_{10}(x)$).

modf

Prototype	`sub function modf(dim val as real, dim byref iptr as real) as real`
Description	The function returns the signed fractional component of `val`, placing its whole number component into the variable pointed to by `iptr`.

pow

Prototype	`sub function pow(dim x as real, dim y as real) as real`
Description	The function returns the value of `x` raised to the power y (i.e. x^y). If `x` is negative, the function will automatically cast `y` into `longint`.

sin

Prototype	`sub function sin(dim arg as real) as real`
Description	The function returns the sine of arg in radians. The return value is from -1 to 1.

sinh

Prototype	`sub function sinh(dim x as real) as real`
Description	The function returns the hyperbolic sine of `x`, defined mathematically as $(e^x-e^{-x})/2$. If the value of `x` is too large (if overflow occurs), the function fails.

sqrt

Prototype	`sub function sqrt(dim x as real) as real`
Description	The function returns the non negative square root of `x`.

tan

Prototype	`sub function tan(dim x as real) as real`
Description	The function returns the tangent of `x` in radians. The return value spans the allowed range of floating point in mikroBasic PRO for AVR.

tanh

Prototype	`sub function tanh(dim x as real) as real)`
Description	The function returns the hyperbolic tangent of `x,` defined mathematically as sinh(x)/cosh(x).

STRING LIBRARY

The mikroBasic PRO for AVR includes a library which automatizes string related tasks.

Library Functions

- memchr
- memcmp
- memcpy
- memmove
- memset
- strcat
- strchr
- strcmp
- strcpy
- strlen
- strncat
- strncpy
- strspn
- strcspn
- strncmp
- strpbrk
- strrchr
- strstr

memchr

Prototype	`sub function memchr(dim p as ^byte, dim ch as byte, dim n as word) as word`
Description	The function locates the first occurrence of the word ch in the initial n words of memory area starting at the address `p`. The function returns the offset of this occurrence from the memory address p or `0xFFFF` if ch was not found. For the parameter p you can use either a numerical value (literal/variable/constant) indicating memory address or a dereferenced value of an object, for example `@mystring` or `@PORTB`.

memcmp

Prototype	`sub function memcmp(dim p1, p2 as ^byte, dim n as word) as integer`

Description	The function returns a positive, negative, or zero value indicating the relationship of first n words of memory areas starting at addresses `p1` and `p2`.
	
	This function compares two memory areas starting at addresses `p1` and `p2` for n words and returns a value indicating their relationship as follows:
	
	`Value  Meaning`
	`< 0  p1 "less than" p2`
	`= 0  p1 "equal to" p2`
	`> 0  p1 "greater than" p2`
	
	The value returned by the function is determined by the difference between the values of the first pair of words that differ in the strings being compared.
	
	For parameters `p1` and `p2` you can use either a numerical value (literal/variable/constant) indicating memory address or a dereferenced value of an object, for example `@mystring` or `@PORTB`.

memcpy

Prototype	`sub procedure memcpy(dim p1, p2 as ^byte, dim nn as word)`
Description	The function copies nn words from the memory area starting at the address `p2` to the memory area starting at `p1`. If these memory buffers overlap, the memcpy function cannot guarantee that words are copied before being overwritten. If these buffers do overlap, use the memmove function. For parameters `p1` and `p2` you can use either a numerical value (literal/variable/constant) indicating memory address or a dereferenced value of an object, for example `@mystring` or `@PORTB`.

memmove

Prototype	`sub procedure memmove(dim p1, p2, as ^byte, dim nn as word)`
Description	The function copies nn words from the memory area starting at the address `p2` to the memory area starting at `p1`. If these memory buffers overlap, the `Memmove` function ensures that the words in `p2` are copied to `p1` before being overwritten. For parameters `p1` and `p2` you can use either a numerical value (literal/variable/constant) indicating memory address or a dereferenced value of an object, for example `@mystring` or `@PORTB`.

memset

Prototype	`sub procedure memset(dim p as ^byte, dim character as byte, dim n as word)`
Description	The function fills the first n words in the memory area starting at the address `p` with the value of word `character`. For parameter p you can use either a numerical value (literal/variable/constant) indicating memory address or a dereferenced value of an object, for example `@mystring` or `@PORTB`.

strcat

Prototype	`sub procedure strcat(dim byref s1, s2 as string[100])`
Description	The function appends the value of string `s2` to string `s1` and terminates `s1` with a null character.

strchr

Prototype	`sub function strchr(dim byref s as string[100], dim ch as byte) as word`
Description	The function searches the string s for the first occurrence of the character ch. The null character terminating s is not included in the search. The function returns the position (index) of the first character ch found in s; if no matching character was found, the function returns `0xFFFF`.

strcmp

Prototype	`sub function strcmp(dim byref s1, s2 as string[100]) as short`
Description	The function lexicographically compares the contents of the strings s1 and s2 and returns a value indicating their relationship: **Value** **Meaning** `< 0` s1 "less than" s2 `= 0` s1 "equal to" s2 `> 0` s1 "greater than" s2 The value returned by the function is determined by the difference between the values of the first pair of words that differ in the strings being compared.

strcpy

Prototype	`sub procedure strcpy(dim byref s1, s2 as string[100])`
Description	The function copies the value of the string `s2` to the string `s1` and appends a null character to the end of `s1`.

strcspn

Prototype	`sub function strcspn(dim byref s1, s2 as string[100]) as word`
Description	The function searches the string `s1` for any of the characters in the string `s2`. The function returns the index of the first character located in s1 that matches any character in `s2`. If the first character in `s1` matches a character in `s2`, a value of 0 is returned. If there are no matching characters in `s1`, the length of the string is returned (not including the terminating null character).

strlen

Prototype	`sub function strlen(dim byref s as string[100]) as word`
Description	The function returns the length, in words, of the string `s.` The length does not include the null terminating character.

strncat

Prototype	`sub procedure strncat(dim byref s1, s2 as string[100], dim size as byte)`
Description	The function appends at most size characters from the string `s2` to the string `s1` and terminates `s1` with a null character. If `s2` is shorter than the `size` characters, `s2` is copied up to and including the null terminating character.

strncmp

Prototype	`sub function strncmp(dim byref s1, s2 as string[100], dim len as byte) as short`

Description	The function lexicographically compares the first `len` words of the strings `s1` and `s2` and returns a value indicating their relationship:
	
	`Value  Meaning`
	`< 0  s1 "less than" s2`
	`= 0  s1 "equal to" s2`
	`> 0  s1 "greater than" s2`
	
	The value returned by the function is determined by the difference between the values of the first pair of words that differ in the strings being compared (within first `len` words).

strncpy

Prototype	`sub procedure strncpy(dim byref s1, s2 as string[100], dim size as word)`
Description	The function copies at most `size` characters from the string `s2` to the string `s1`. If `s2` contains fewer characters than `size`, `s1` is padded out with null characters up to the total length of the `size` characters.

strpbrk

Prototype	`sub function strpbrk(dim byref s1, s2 as string[100]) as word`
Description	The function searches `s1` for the first occurrence of any character from the string `s2`. The null terminator is not included in the search. The function returns an index of the matching character in `s1`. If `s1` contains no characters from `s2`, the function returns `0xFFFF`.

strrchr

Prototype	`sub function strrchr(dim byref s as string[100], dim ch as byte) as word`
Description	The function searches the string `s` for the last occurrence of the character `ch`. The null character terminating `s` is not included in the search. The function returns an index of the last `ch` found in `s`; if no matching character was found, the function returns `0xFFFF`.

strspn

Prototype	`sub function strspn(dim byref s1, s2 as string[100]) as byte`
Description	The function searches the string `s1` for characters not found in the `s2` string. The function returns the index of first character located in `s1` that does not match a character in `s2`. If the first character in `s1` does not match a character in `s2`, a value of 0 is returned. If all characters in `s1` are found in `s2`, the length of s1 is returned (not including the terminating null character).

strstr

Prototype	`sub function strstr(dim byref s1, s2 as string[100]) as word`
Description	The function locates the first occurrence of the string `s2` in the string `s1` (excluding the terminating null character). The function returns a number indicating the position of the first occurrence of `s2` in `s1`; if no string was found, the function returns `0xFFFF`. If `s2` is a null string, the function returns 0.

TIME LIBRARY

The Time Library contains functions and type definitions for time calculations in the UNIX time format which counts the number of seconds since the "epoch". This is very convenient for programs that work with time intervals: the difference between two UNIX time values is a real-time difference measured in seconds.

What is the epoch?
Originally it was defined as the beginning of 1970 GMT. (January 1, 1970 Julian day) GMT, Greenwich Mean Time, is a traditional term for the time zone in England.

The TimeStruct type is a structure type suitable for time and date storage.

Library Routines

- Time_dateToEpoch
- Time_epochToDate
- Time_datediff

Time_dateToEpoch

Prototype	`sub function Time_dateToEpoch(dim byref ts as TimeStruct) as longint`
Returns	Number of seconds since January 1, 1970 0h00mn00s.
Description	This function returns the UNIX time : number of seconds since January 1, 1970 0h00mn00s. Parameters : - `ts:` time and date value for calculating UNIX time.
Requires	Nothing.

Example	`dim ts1 as TimeStruct`
	`  Epoch as longint`
	`...`
	`' what is the epoch of the date in ts ?`
	`epoch = Time_dateToEpoch(ts1)`

Time_epochToDate

Prototype	`sub procedure Time_epochToDate(dim e as longint, dim byref ts as TimeStruct)`
Returns	Nothing.
Description	Converts the UNIX time to time and date. Parameters : - `e:` UNIX time (seconds since UNIX epoch) - `ts:` time and date structure for storing conversion output
Requires	Nothing.

Example	`dim ts2 as TimeStruct`
	`  epoch as longint`
	`...`
	`' what date is epoch 1234567890 ?`
	`epoch = 1234567890`
	`Time_epochToDate(epoch,ts2)`

Time_dateDiff

Prototype	`sub function Time_dateDiff(dim t1 as ^TimeStruct, dim t2 as ^TimeStruct) as longint`
Returns	Time difference in seconds as a signed long.
Description	This function compares two dates and returns time difference in seconds as a signed long. The result is positive if `t1` is before `t2`, null if `t1` is the same as `t2` and negative if `t1` is after `t2`. Parameters : - `t1:` time and date structure (the first comparison parameter) - `t2:` time and date structure (the second comparison parameter)
Requires	Nothing.

Example	`dim ts1, ts2 as TimeStruct`
	`  diff as longint`
	`...`
	`' how many seconds between these two dates contained in ts1 and ts2 buffers?`
	`diff = Time_dateDiff(ts1, ts2)`

Library Example

Demonstration of Time library routines usage for time calculations in UNIX time format.

```
program Time_Demo

dim epoch, diff as longint

'**********************************
   ts1, ts2 as TimeStruct
'**********************************
main:

  ts1.ss = 0
  ts1.mn = 7
  ts1.hh = 17
  ts1.md = 23
  ts1.mo = 5
  ts1.yy = 2006

  ' *
  ' * What is the epoch of the date in ts ?
  ' *
  epoch = Time_dateToEpoch(@ts1)             ' 1148404020

  ' *
  ' * What date is epoch 1234567890 ?
  ' *
  epoch = 1234567890
  Time_epochToDate(epoch, @ts2)            ' { 0x1E, 0x1F, 0x17, 0x0D,
0x04, 0x02, 0x07D9)

  ' *
  ' * How much seconds between this two dates ?
  ' *
  diff = Time_dateDiff(@ts1, @ts2)           ' 86163870

end.
```

TimeStruct type definition

```
structure TimeStruct
  dim ss as byte   ' seconds
  dim mn as byte   ' minutes
  dim hh as byte   ' hours
  dim md as byte   ' day in month, from 1 to 31
  dim wd as byte    ' day in week, monday=0, tuesday=1, .... sunday=6
  dim mo as byte      ' month number, from 1 to 12 (and not from 0
to 11 as with unix C time !)
  dim yy as word      ' year Y2K compliant, from 1892 to 2038
end structure
```

TRIGONOMETRY LIBRARY

The mikroBasic PRO for AVR implements fundamental trigonometry functions. These functions are implemented as look-up tables. Trigonometry functions are implemented in integer format in order to save memory.

Library Routines

- sinE3
- cosE3

sinE3

Prototype	`sub function sinE3(dim angle_deg as word) as integer`
Returns	The function returns the sine of input parameter.
Description	The function calculates sine multiplied by 1000 and rounded to the nearest integer: `result = round(sin(angle_deg)*1000)` Parameters: - `angle_deg:` input angle in degrees **Note:** Return value range: -1000..1000.
Requires	Nothing.

Example	`dim res as integer`
	`...`
	`res = sinE3(45)  ' result is 707`

cosE3

Prototype	`sub function cosE3(dim angle_deg as word) as integer`
Returns	The function returns the cosine of input parameter.
Description	The function calculates cosine multiplied by 1000 and rounded to the nearest integer: `result = round(cos(angle_deg)*1000)` Parameters: - `angle_deg:` input angle in degrees **Note:** Return value range: -1000..1000.
Requires	Nothing.

Example	`dim res as integer`
	`...`
	`res = cosE3(196)  ' result is -193`

MikroElektronika

SOFTWARE AND HARDWARE SOLUTIONS FOR EMBEDDED WORLD ...making it simple

If you have any other question, comment or a business proposal, please contact us:

web: www.mikroe.com
e-mail: office@mikroe.com

If you are experiencing problems with any of our products
or you just want additional information, please let us know.

TECHNICAL SUPPORT: www.mikroe.com/en/support

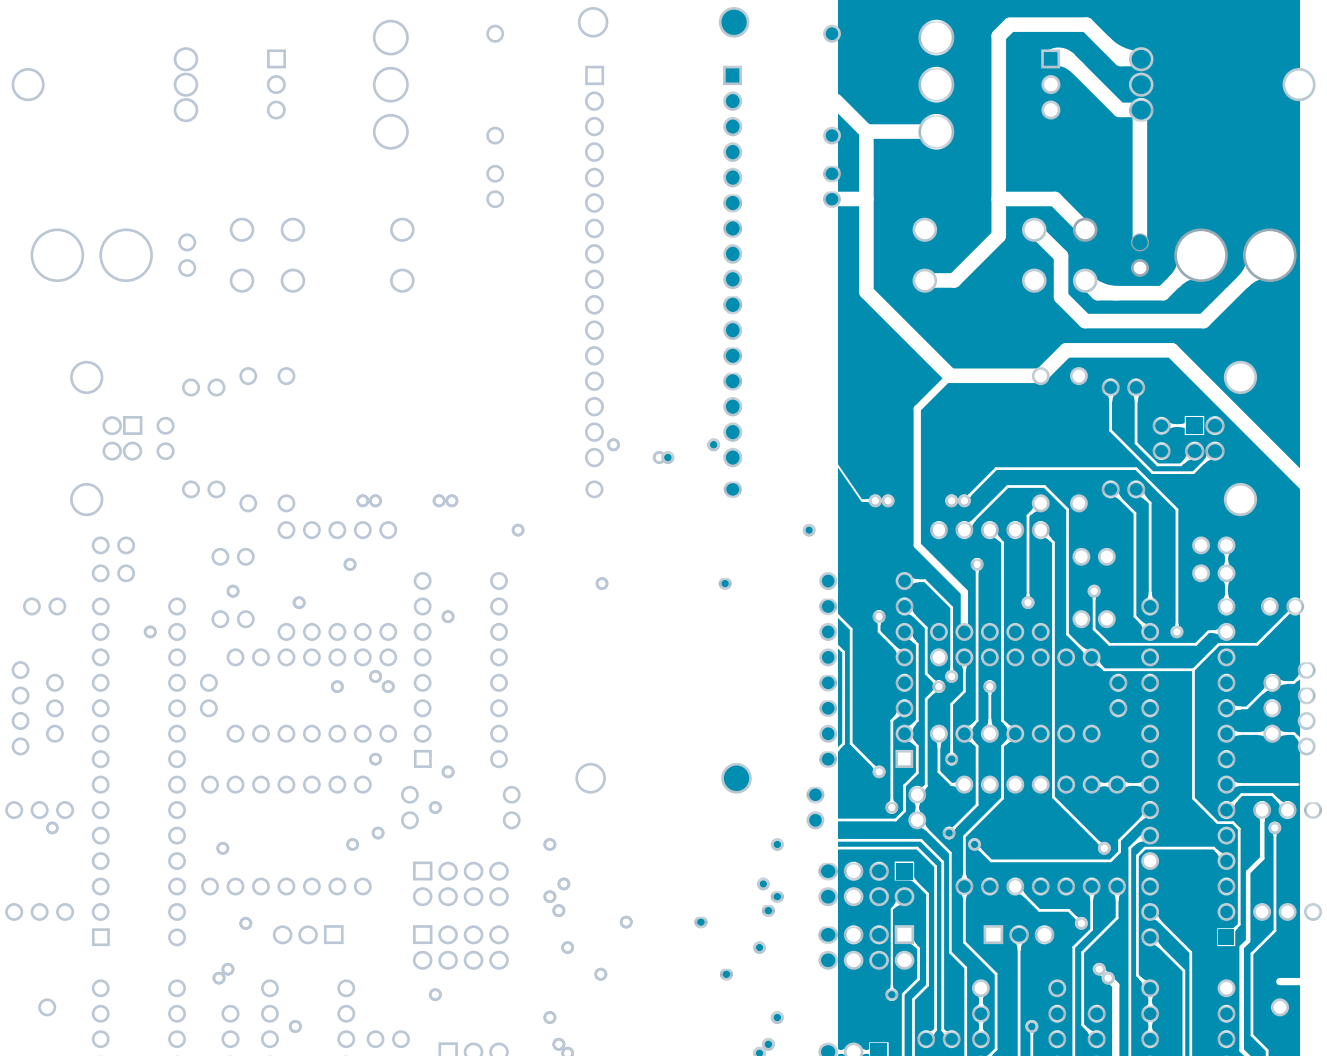

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

mikroElektronika:

MIKROE-722